
Leaspy
Release 1.3.1

Igor Koval, Raphael Couronne, Etienne Maheux, Arnaud Valladier,

Mar 18, 2022

GETTING STARTED

1 Installation	3
1.1 Package installation	3
1.2 Notebook configuration	3
2 Leaspy in a nutshell	5
2.1 Comprehensive example	5
2.2 Using my own data	8
2.2.1 Data format	8
2.2.2 Data scale & constraints	8
2.2.3 Missing data	8
2.3 Going further	8
3 API Documentation	9
3.1 <code>leaspy.api: Main API</code>	9
3.1.1 <code>leaspy.api.Leaspy</code>	9
3.2 <code>leaspy.models: Models</code>	18
3.2.1 <code>leaspy.models.model_factory.ModelFactory</code>	19
3.2.2 <code>leaspy.models.abstract_model.AbstractModel</code>	19
3.2.3 <code>leaspy.models.univariate_model.UnivariateModel</code>	27
3.2.4 <code>leaspy.models.abstract_multivariate_model.AbstractMultivariateModel</code>	36
3.2.5 <code>leaspy.models.multivariate_model.MultivariateModel</code>	44
3.2.6 <code>leaspy.models.multivariate_parallel_model.MultivariateParallelModel</code>	53
3.2.7 <code>leaspy.models.lme_model.LMEModel</code>	61
3.2.8 <code>leaspy.models.constant_model.ConstantModel</code>	64
3.2.9 <code>leaspy.models.utils.attributes: Models' attributes</code>	66
3.2.10 <code>leaspy.models.utils.initialization: Initialization methods</code>	75
3.3 <code>leaspy.algo: Algorithms</code>	76
3.3.1 <code>leaspy.algo.abstract_algo.AbstractAlgo</code>	76
3.3.2 <code>leaspy.algo.algo_factory.AlgoFactory</code>	79
3.3.3 <code>leaspy.algo.fit: Fit algorithms</code>	80
3.3.4 <code>leaspy.algo.personalize: Personalization algorithms</code>	89
3.3.5 <code>leaspy.algo.simulate: Simulation algorithms</code>	95
3.3.6 <code>leaspy.algo.others: Other algorithms</code>	100
3.3.7 <code>leaspy.algo.utils.samplers: Samplers</code>	107
3.4 <code>leaspy.dataset: Datasets</code>	110
3.4.1 <code>leaspy.datasets.loader.Loader</code>	110
3.5 <code>leaspy.io: Inputs / Outputs</code>	112
3.5.1 <code>leaspy.io.data: Data containers</code>	112
3.5.2 <code>leaspy.io.settings: Settings classes</code>	116
3.5.3 <code>leaspy.io.outputs: Outputs classes</code>	122

3.5.4	<code>leaspy.io.realizations: Realizations classes</code>	128
3.6	<code>leaspy.exceptions: Exceptions</code>	131
3.6.1	<code>leaspy.exceptions.LeaspyException</code>	131
3.6.2	<code>leaspy.exceptions.LeaspyTypeError</code>	132
3.6.3	<code>leaspy.exceptions.LeaspyInputError</code>	132
3.6.4	<code>leaspy.exceptions.LeaspyDataInputError</code>	132
3.6.5	<code>leaspy.exceptions.LeaspyModelInputError</code>	132
3.6.6	<code>leaspy.exceptions.LeaspyAlgoInputError</code>	132
3.6.7	<code>leaspy.exceptions.LeaspyIndividualParamsInputError</code>	132
3.6.8	<code>leaspy.exceptions.LeaspyConvergenceError</code>	133
4	User guide	135
4.1	Mathematical aspects	135
4.1.1	Introduction	135
4.1.2	Mathematical formulation	135
4.1.3	Riemannian framework	135
4.1.4	Missing data	135
4.2	Leaspy's tutorial	135
4.2.1	What do I need?	135
4.2.2	Derive the population parameters	136
4.2.3	Derive the individual parameters	136
4.2.4	Cofactor analysis	136
4.2.5	What about missing values?	136
4.2.6	Predictions	136
4.2.7	Simulations	136
5	Index	137
6	LEArning Spatiotemporal Patterns in Python	139
6.1	Description	139
6.2	Getting started	140
6.3	API Documentation	140
6.4	User Guide	140
6.5	License	140
6.6	Further information	140
Index		143



INSTALLATION

1.1 Package installation

1. Leaspy requires Python >= 3.7
2. Create a dedicated environment (optional):

Using conda:

```
conda create --name leaspy python=3.7
conda activate leaspy
```

Or using pyenv:

```
pyenv virtualenv leaspy
pyenv local leaspy
```

3. Install leaspy with pip:

```
pip install leaspy
```

It will automatically install all needed dependencies.

1.2 Notebook configuration

After installation, you can run the examples in [Leaspy in a nutshell](#) and in [the Leaspy API](#).

To do so, in your leaspy environment, you can download ipykernel to use leaspy with jupyter notebooks

```
conda install ipykernel
python -m ipykernel install --user --name=leaspy
```

Now, you can open `jupyter lab` or `jupyter notebook` and select the leaspy kernel.

LEASPY IN A NUTSHELL

2.1 Comprehensive example

We first load synthetic data from the *leaspy.datasets* to get of a grasp of longitudinal data.

```
>>> from leaspy import AlgorithmSettings, Data, Leaspy
>>> from leaspy.datasets import Loader
>>> alzheimer_df = Loader.load_dataset('alzheimer-multivariate')
>>> print(alzheimer_df.columns)
Index(['E-Cog Subject', 'E-Cog Study-partner', 'MMSE', 'RAVLT', 'FAQ',
       'FDG PET', 'Hippocampus volume ratio'], dtype='object')
>>> alzheimer_df = alzheimer_df[['MMSE', 'RAVLT', 'FAQ', 'FDG PET']]
>>> print(alzheimer_df.head())
      MMSE    RAVLT     FAQ     FDG PET
ID TIME
GS-001 73.973183  0.111998  0.510524  0.178827  0.454605
      74.573181  0.029991  0.749223  0.181327  0.450064
      75.173180  0.121922  0.779680  0.026179  0.662006
      75.773186  0.092102  0.649391  0.156153  0.585949
      75.973183  0.203874  0.612311  0.320484  0.634809
```

The data correspond to repeated visits (*TIME* index) of different participants (*ID* index). Each visit corresponds to the measurement of 4 different variables : the MMSE, the RAVLT, the FAQ and the FDG PET.

If plotted, the data would look like the following:

where each color corresponds to a variable, and the connected dots corresponds to the repeated visits of a single participant.

Not very engaging, right ? To go a step further, let's first encapsulate the data into the main *leaspy Data container*.


```
>>> data = Data.from_dataframe(alzheimer_df)
```

Leaspy core functionality is to estimate the group-average trajectory of the different variables that are measured in a population. Let's initialize the leaspy object

```
>>> leaspy_logistic = Leaspy('logistic', source_dimension=2)
```

as well as the algorithm needed to estimate the group-average trajectory:

```
>>> fit_settings = AlgorithmSettings('mcmc_saem', seed=0, n_iter=8000)
```

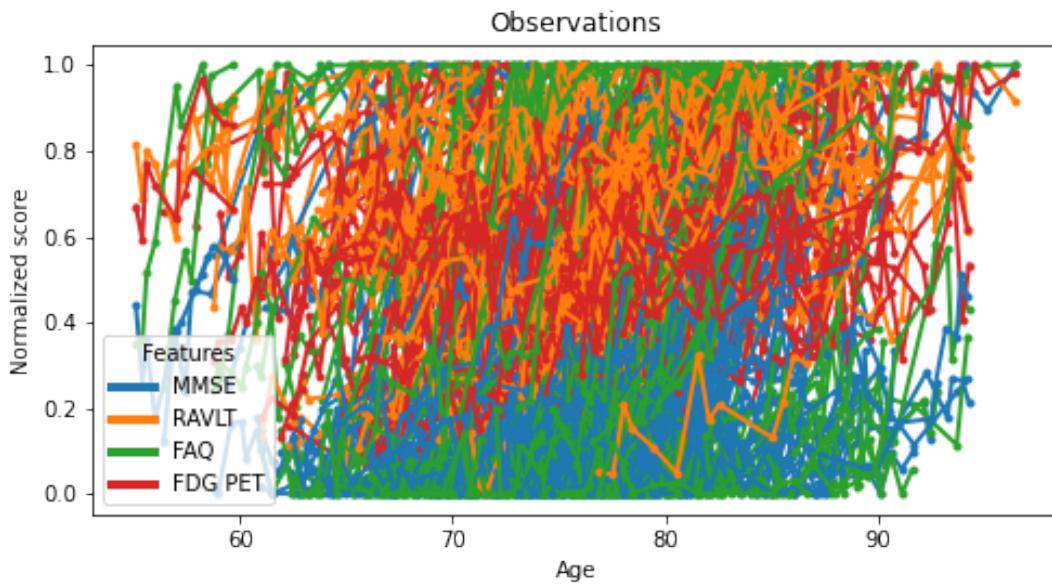

We then use the `Leaspy.fit` method to estimate the group average trajectory:



```
>>> leaspy_logistic.fit(data, fit_settings)
=> Setting seed to 0
|#####| 8000/8000 iterations
Fit with `mcmc_saem` took: 6m 57s
The standard deviation of the noise at the end of the fit is:
MMSE: 6.50%
RAVLT: 7.63%
FAQ: 6.67%
FDG PET: 7.87%
```

If we were to plot the measured average progression of the variables - see [started example notebook](#) for details - it would look like the following

We can also derive the individual trajectory of each subject. To do this, we use the `Leaspy.personalize` method, again by providing the proper settings.

```
>>> personalize_settings = AlgorithmSettings('scipy_minimize', seed=0)
>>> individual_parameters = leaspy_logistic.personalize(data, personalize_settings)
=> Setting seed to 0
|#####| 200/200 subjects
Personalize with `scipy_minimize` took: 9s
The standard deviation of the noise at the end of the personalize is:
MMSE: 6.32%
RAVLT: 7.27%
FAQ: 6.29%
FDG PET: 7.49%
```

Plotting the input participant data against its personalization would give the following - see [started example notebook](#) for details.

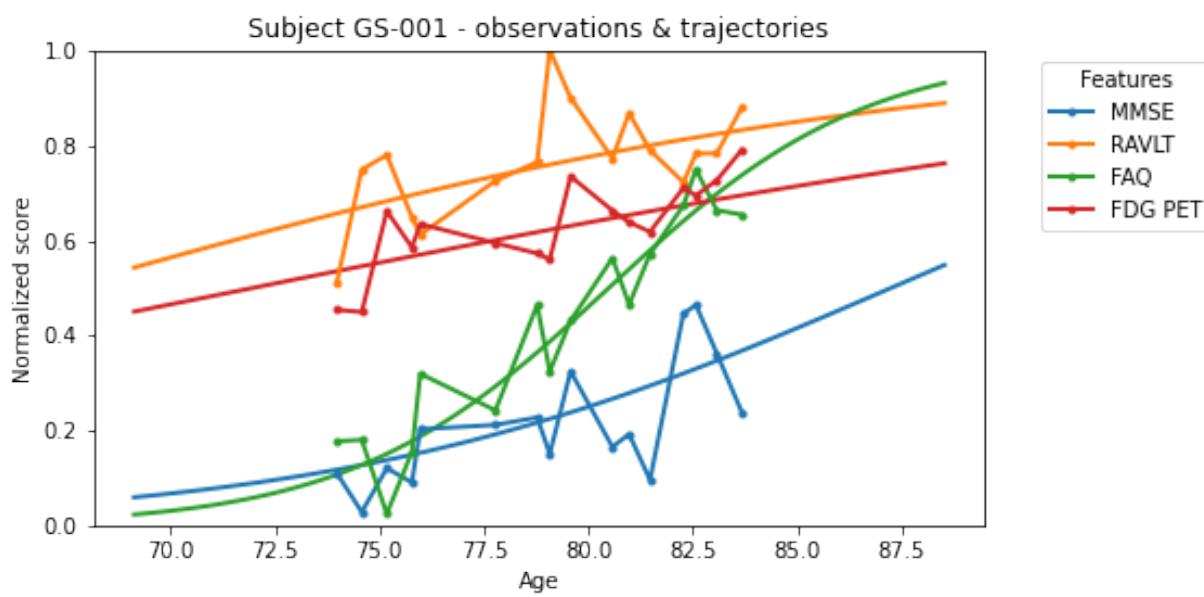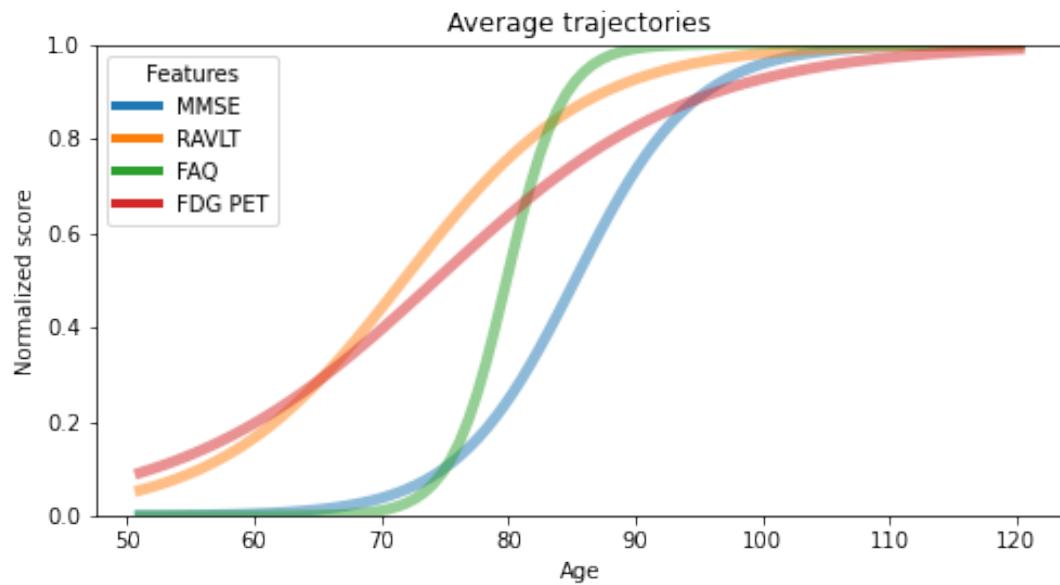

2.2 Using my own data

2.2.1 Data format

Leaspy uses its own data container. To use it properly, you need to provide a *csv* file or a *pandas.DataFrame* in the right format. Let's have a look at the data used in the previous example:

```
>>> print(alzheimer_df.head())
```

		MMSE	RAVLT	FAQ	FDG	PET
ID	TIME					
GS-001	73.973183	0.111998	0.510524	0.178827	0.454605	
	74.573181	0.029991	0.749223	0.181327	0.450064	
	75.173180	0.121922	0.779680	0.026179	0.662006	
	75.773186	0.092102	0.649391	0.156153	0.585949	
	75.973183	0.203874	0.612311	0.320484	0.634809	

You **MUST** have *ID* and *TIME*, either in index or in the columns. The other columns must be the observed variables (also named *features* or *endpoints*). In this fashion, you have one column per *feature* and one line per *visit*.

2.2.2 Data scale & constraints

Leaspy uses *linear* and *logistic* models. The features **MUST** be increasing with time. For the *logistic* model, you need to rescale your data between 0 and 1.

2.2.3 Missing data

Leaspy automatically handles missing data as long as they are encoded as `nan` in your *pandas.DataFrame*, or as empty values in your *csv* file.

2.3 Going further

You can check the [User guide](#) and the [full API documentation](#). You can also dive into the started example of the Leaspy repository. The Disease Progression Modelling website also hosts a mathematical introduction and tutorials for Leaspy.

API DOCUMENTATION

Full API documentation of the *Leaspy* Python package.

3.1 leaspy.api: Main API

The main class, from which you can instantiate and calibrate a model, personalize it to a given set of subjects, estimate trajectories and simulate synthetic data.

`Leaspy(model_name, **kwargs)`

Main API used to fit models, run algorithms and simulations.

3.1.1 leaspy.api.Leaspy

`class Leaspy(model_name: str, **kwargs)`
Bases: `object`

Main API used to fit models, run algorithms and simulations. This is the main class of the Leaspy package.

Parameters

model_name [str] The name of the model that will be used for the computations. The available models are:

- 'logistic' - suppose that every modality follow a logistic curve across time.
- 'logistic_parallel' - idem & suppose also that every modality have the same slope at inflexion point
- 'linear' - suppose that every modality follow a linear curve across time.
- 'univariate_logistic' - a 'logistic' model for a single modality.
- 'univariate_linear' - idem with a 'linear' model.
- 'constant' - benchmark model for constant predictions.
- 'lme' - benchmark model for classical linear mixed-effects model.

****kwargs** Keyword arguments directly passed to the model for its initialization (through `ModelFactory.model()`). Refer to the corresponding model to know possible arguments.

noise_model [str] *For manifold-like models.* Define the noise structure of the model, can be either:

- 'gaussian_scalar': gaussian error, with same standard deviation for all features

- 'gaussian_diagonal': gaussian error, with one standard deviation parameter per feature (default)
- 'bernoulli': for binary data (Bernoulli realization)

source_dimension [int, optional] *For multivariate models only.* Set the degrees of freedom for _spatial_variability. This number MUST BE strictly lower than the number of features. By default, this number is equal to square root of the number of features. One can interpret this hyperparameter as a way to reduce the dimension of inter-individual _spatial_variability between progressions.

See also:

[leaspy.models](#)

[ModelFactory](#)

[Data](#)

[AlgorithmSettings](#)

[leaspy.algo](#)

[IndividualParameters](#)

Attributes

model [*AbstractModel*] Model used for computations, is an instance of *AbstractModel*.

type [str (read-only)] Name of the model - will be one of the names listed above.

Methods

<code>calibrate(data, settings)</code>	Duplicates of the <code>fit()</code> method.
<code>check_if_initialized()</code>	Check if model is initialized.
<code>estimate(timepoints, individual_parameters, *)</code>	Return the model values for individuals characterized by their individual parameters z_i at time-points $(t_{i,j})_j$.
<code>estimate_ages_from_biomarker_values(...[, ...])</code>	For individuals characterized by their individual parameters z_i , returns the age $t_{i,j}$ at which a given feature value $y_{i,j,k}$ is reached.
<code>fit(data, settings)</code>	Estimate the model's parameters θ for a given dataset and a given algorithm.
<code>load(path_to_model_settings)</code>	Instantiate a Leaspy object from json model parameter file or the corresponding dictionary.
<code>personalize(data, settings, *[, return_noise])</code>	From a model, estimate individual parameters for each <i>ID</i> of a given dataset.
<code>save(path, **kwargs)</code>	Save Leaspy object as json model parameter file.
<code>simulate(individual_parameters, data, settings)</code>	Generate longitudinal synthetic patients data from a given model, a given collection of individual parameters and some given settings.

calibrate(*data*: Data, *settings*: AlgorithmSettings) → None

Duplicates of the `fit()` method.

check_if_initialized() → None

Check if model is initialized.

Raises

LeaspyInputError Raise an error if the model has not been initialized.

estimate(*timepoints*: Union[pd.MultiIndex, Dict[IDType, List[float]]], *individual_parameters*: IndividualParameters, *, *to_dataframe*: bool = None) → Union[pd.DataFrame, Dict[IDType, np.ndarray]]

Return the model values for individuals characterized by their individual parameters z_i at time-points $(t_{i,j})_j$.

Parameters

timepoints [dictionary {str/int: array_like[numeric]} or pandas.MultiIndex] Contains, for each individual, the time-points to estimate. It can be a unique time-point or a list of time-points.

individual_parameters [*IndividualParameters*] Corresponds to the individual parameters of individuals.

to_dataframe [bool or None (default)] Whether to output a dataframe of estimations? If None: default is to be True if and only if timepoints is a pandas.MultiIndex

Returns

individual_trajectory [pandas.DataFrame or dict (depending on *to_dataframe* flag)] Key: patient indices. Value: numpy.ndarray of the estimated value, in the shape (number of timepoints, number of features)

Examples

Given the individual parameters of two subjects, estimate the features of the first at 70, 74 and 80 years old and at 71 and 72 years old for the second.

```
>>> from leaspy.datasets import Loader
>>> leaspy_logistic = Loader.load_leaspy_instance('parkinson-putamen-train')
>>> individual_parameters = Loader.load_individual_parameters('parkinson-putamen-train')
>>> df_train = Loader.load_dataset('parkinson-putamen-train_and_test').xs('train', level='SPLIT')
>>> timepoints = {'GS-001': (70, 74, 80), 'GS-002': (71, 72)} # as dict
>>> timepoints = df_train.sort_index().groupby('ID').tail(2).index # as pandas_(ID, TIME) MultiIndex
>>> estimations = leaspy_logistic.estimate(timepoints, individual_parameters)
```

estimate_ages_from_biomarker_values(*individual_parameters*: IndividualParameters, *biomarker_values*: Dict[str, Union[List[float], float]], *feature*: Optional[str] = None) → Dict[str, Union[List[float], float]]

For individuals characterized by their individual parameters z_i , returns the age $t_{i,j}$ at which a given feature value $y_{i,j,k}$ is reached.

Parameters

individual_parameters [*IndividualParameters*] Corresponds to the individual parameters of individuals.

biomarker_values [Dict[Union[str, int], Union[List, float]]] Dictionary that associates to each patient (being a key of the dictionary) a value (float between 0 and 1, or a list of such floats) from which leaspy will estimate the age at which the value is reached. TODO? shouldn't we allow pandas.Series / pandas.DataFrame

feature [str] For multivariate models only: feature name (indicates to which model feature the biomarker values belongs)

Returns

biomarker_ages [] Dictionary that associates to each patient (being a key of the dictionary) the corresponding age (or ages) for which the value(s) from biomarker_values have been reached. Same format as biomarker values.

Raises

LeaspyTypeError bad types for input

LeaspyInputError inconsistent inputs

Examples

Given the individual parameters of two subjects, and the feature value of 0.2 for the first and 0.5 and 0.6 for the second, get the corresponding estimated ages at which these values will be reached.

```
>>> from leaspy.datasets import Loader
>>> leaspy_logistic = Loader.load_leaspy_instance('parkinson-putamen-train')
>>> individual_parameters = Loader.load_individual_parameters('parkinson-
->putamen-train')
>>> biomarker_values = {'GS-001': [0.2], 'GS-002': [0.5, 0.6]}
# Here the 'feature' argument is optional, as the model is univariate
>>> estimated_ages = leaspy_logistic.estimate_ages_from_biomarker_
->values(individual_parameters, biomarker_values,
>>> feature='PUTAMEN')
```

fit(data: Data, settings: AlgorithmSettings) → None

Estimate the model's parameters θ for a given dataset and a given algorithm.

These model's parameters correspond to the fixed-effects of the mixed-effects model.

Parameters

data [Data] Contains the information of the individuals, in particular the time-points ($t_{i,j}$) and the observations ($y_{i,j}$).

settings [AlgorithmSettings] Contains the algorithm's settings.

See also:

`leaspy.algo.fit`

Examples

Fit a logistic model on a longitudinal dataset, display the group parameters

```
>>> from leaspy import AlgorithmSettings, Data, Leaspy
>>> from leaspy.datasets import Loader
>>> putamen_df = Loader.load_dataset('parkinson-putamen')
>>> data = Data.from_dataframe(putamen_df)
>>> leaspy_logistic = Leaspy('univariate_logistic')
>>> settings = AlgorithmSettings('mcmc_saem', seed=0)
>>> settings.set_logs('path/to/logs', console_print_periodicity=50)
```

(continues on next page)

(continued from previous page)

```
>>> leaspy_logistic.fit(data, settings)
=> Setting seed to 0
| #####| 10000/10000 iterations
The standard deviation of the noise at the end of the calibration is:
0.0213
Calibration took: 30s
>>> print(str(leaspy_logistic.model))
== MODEL ==
g : tensor([-1.1744])
tau_mean : 68.56787872314453
tau_std : 10.12782096862793
xi_mean : -2.3396952152252197
xi_std : 0.5421289801597595
noise_std : 0.021265486255288124
```

classmethod load(path_to_model_settings: str) → Leaspy

Instantiate a Leaspy object from json model parameter file or the corresponding dictionary.

This function can be used to load a pre-trained model.

Parameters

path_to_model_settings [str or dict] Path to the model's settings json file or dictionary of model parameters

Returns

Leaspy An instanced Leaspy object with the given population parameters θ .

Examples

Load a univariate logistic pre-trained model.

```
>>> from leaspy import Leaspy
>>> from leaspy.datasets.loader import model_paths
>>> leaspy_logistic = Leaspy.load(model_paths['parkinson-putamen-train'])
>>> print(str(leaspy_logistic.model))
== MODEL ==
g : tensor([-0.7901])
tau_mean : 64.18125915527344
tau_std : 10.199116706848145
xi_mean : -2.346343994140625
xi_std : 0.5663877129554749
noise_std : 0.021229960024356842
```

personalize(data: Data, settings: AlgorithmSettings, *, return_noise: bool = False)

From a model, estimate individual parameters for each ID of a given dataset. These individual parameters correspond to the random-effects ($z_{i,j}$) of the mixed-effects model.

Parameters

data [Data] Contains the information of the individuals, in particular the time-points ($t_{i,j}$) and the observations ($y_{i,j}$).

settings [AlgorithmSettings] Contains the algorithm's settings.

return_noise [bool (default False)] Returns a tuple (individual_parameters, noise_std) if True

Returns

ips [*IndividualParameters*] Contains individual parameters

if return_noise is True [tuple]

- **ips** : *IndividualParameters*
- **noise_std** : `torch.Tensor`

Raises

LeaspyInputError if model is not initialized.

See also:

`leaspy.algo.personalize`

Examples

Compute the individual parameters for a given longitudinal dataset and calibrated model, then display the histogram of the log-acceleration:

```
>>> from leaspy import AlgorithmSettings, Data
>>> from leaspy.datasets import Loader
>>> leaspy_logistic = Loader.load_leaspy_instance('parkinson-putamen-train')
>>> putamen_df = Loader.load_dataset('parkinson-putamen')
>>> data = Data.from_dataframe(putamen_df)
>>> personalize_settings = AlgorithmSettings('scipy_minimize', seed=0)
>>> individual_parameters = leaspy_logistic.personalize(data, personalize_
-> settings)
=> Setting seed to 0
| #####| 200/200 subjects
The standard deviation of the noise at the end of the personalization is:
0.0191
Personalization scipy_minimize took: 5s
>>> ip_df = individual_parameters.to_dataframe()
>>> ip_df[['xi']].hist()
```

save(*path: str*, ***kwargs*) → `None`

Save Leaspy object as json model parameter file.

Parameters

path [str] Path to store the model's parameters.

****kwargs** Keyword arguments for `save()` (including those sent to `json.dump()` function).

Examples

Load the univariate dataset 'parkinson-putamen', calibrate the model & save it:

```
>>> from leaspy import AlgorithmSettings, Data, Leaspy
>>> from leaspy.datasets import Loader
>>> putamen_df = Loader.load_dataset('parkinson-putamen')
>>> data = Data.from_dataframe(putamen_df)
>>> leaspy_logistic = Leaspy('univariate_logistic')
>>> settings = AlgorithmSettings('mcmc_saem', seed=0)
>>> leaspy_logistic.fit(data, settings)
=> Setting seed to 0
|#####| 10000/10000 iterations
The standard deviation of the noise at the end of the calibration is:
0.0213
Calibration took: 30s
>>> leaspy_logistic.save('leaspy-logistic-model_parameters-seed0.json')
```

simulate(individual_parameters: IndividualParameters, data: Data, settings: AlgorithmSettings)

Generate longitudinal synthetic patients data from a given model, a given collection of individual parameters and some given settings.

This procedure learn the joined distribution of the individual parameters and baseline age of the subjects present in `individual_parameters` and `data` respectively to sample new patients from this joined distribution. The model is used to compute for each patient their scores from the individual parameters. The number of visits per patients is set in `settings['parameters']['mean_number_of_visits']` and `settings['parameters']['std_number_of_visits']` which are set by default to 6 and 3 respectively.

Parameters

`individual_parameters` [*IndividualParameters*] Contains the individual parameters.

`data` [*Data*] Data object

`settings` [*AlgorithmSettings*] Contains the algorithm's settings.

Returns

`simulated_data` [*Result*] Contains the generated individual parameters & the corresponding generated scores.

See also:

[SimulationAlgorithm](#)

Notes

To generate a new subject, first we estimate the joined distribution of the individual parameters and the reparametrized baseline ages. Then, we randomly pick a new point from this distribution, which define the individual parameters & baseline age of our new subjects. Then, we generate the timepoints following the baseline age. Then, from the model and the generated timepoints and individual parameters, we compute the corresponding values estimations. Then, we add some gaussian noise to these estimations. The level of noise is, by default, equal to the corresponding 'noise_std' parameter of the model. You can choose to set your own noise value.

Examples

Use a calibrated model & individual parameters to simulate new subjects similar to the ones you have:

```
>>> from leaspy import AlgorithmSettings, Data
>>> from leaspy.datasets import Loader
>>> putamen_df = Loader.load_dataset('parkinson-putamen-train_and_test')
>>> data = Data.from_dataframe(putamen_df.xs('train', level='SPLIT'))
>>> leaspy_logistic = Loader.load_leaspy_instance('parkinson-putamen-train')
>>> individual_parameters = Loader.load_individual_parameters('parkinson-putamen-train')
>>> simulation_settings = AlgorithmSettings('simulation', seed=0)
>>> simulated_data = leaspy_logistic.simulate(individual_parameters, data, simulation_settings)
=>> Setting seed to 0
>>> print(simulated_data.data.to_dataframe().set_index(['ID', 'TIME']).head())
          PUTAMEN
ID           TIME
Generated_subject_001 63.611107  0.556399
                  64.111107  0.571381
                  64.611107  0.586279
                  65.611107  0.615718
                  66.611107  0.644518
>>> print(simulated_data.get_dataframe_individual_parameters().tail())
          tau      xi
ID
Generated_subject_096 46.771028 -2.483644
Generated_subject_097 73.189964 -2.513465
Generated_subject_098 57.874967 -2.175362
Generated_subject_099 54.889400 -2.069300
Generated_subject_100 50.046972 -2.259841
```

By default, you have simulate 100 subjects, with an average number of visit at 6 & and standard deviation is the number of visits equal to 3. Let's say you want to simulate 200 subjects, everyone of them having ten visits exactly:

```
>>> simulation_settings = AlgorithmSettings('simulation', seed=0, number_of_subjects=200, \
mean_number_of_visits=10, std_number_of_visits=0)
=>> Setting seed to 0
>>> simulated_data = leaspy_logistic.simulate(individual_parameters, data, simulation_settings)
>>> print(simulated_data.data.to_dataframe().set_index(['ID', 'TIME']).tail())
          PUTAMEN
ID           TIME
Generated_subject_200 72.119949  0.829185
                  73.119949  0.842113
                  74.119949  0.854271
                  75.119949  0.865680
                  76.119949  0.876363
```

By default, the generated subjects are named '*Generated_subject_001*', '*Generated_subject_002*' and so on. Let's say you want a shorter name, for example '*GS-001*'. Furthermore, you want to set the level of noise around the subject trajectory when generating the observations:

```

>>> simulation_settings = AlgorithmSettings('simulation', seed=0, prefix='GS-', noise=.2)
>>> simulated_data = leaspy_logistic.simulate(individual_parameters, data, simulation_settings)
==> Setting seed to 0
>>> print(simulated_data.get_dataframe_individual_parameters().tail())
          tau        xi
ID
GS-096  46.771028 -2.483644
GS-097  73.189964 -2.513465
GS-098  57.874967 -2.175362
GS-099  54.889400 -2.069300
GS-100  50.046972 -2.259841

```

`class Leaspy(model_name: str, **kwargs)`

Main API used to fit models, run algorithms and simulations. This is the main class of the Leaspy package.

Parameters

model_name [str] The name of the model that will be used for the computations. The available models are:

- 'logistic' - suppose that every modality follow a logistic curve across time.
- 'logistic_parallel' - idem & suppose also that every modality have the same slope at inflexion point
- 'linear' - suppose that every modality follow a linear curve across time.
- 'univariate_logistic' - a 'logistic' model for a single modality.
- 'univariate_linear' - idem with a 'linear' model.
- 'constant' - benchmark model for constant predictions.
- 'lme' - benchmark model for classical linear mixed-effects model.

****kwargs** Keyword arguments directly passed to the model for its initialization (through `ModelFactory.model()`). Refer to the corresponding model to know possible arguments.

noise_model [str] *For manifold-like models.* Define the noise structure of the model, can be either:

- 'gaussian_scalar': gaussian error, with same standard deviation for all features
- 'gaussian_diagonal': gaussian error, with one standard deviation parameter per feature (default)
- 'bernoulli': for binary data (Bernoulli realization)

source_dimension [int, optional] *For multivariate models only.* Set the degrees of freedom for _spatial_ variability. This number MUST BE strictly lower than the number of features. By default, this number is equal to square root of the number of features. One can interpret this hyperparameter as a way to reduce the dimension of inter-individual _spatial_ variability between progressions.

See also:

`leaspy.models`

`ModelFactory`

Data**AlgorithmSettings****leaspy.algo****IndividualParameters****Attributes**

model [*AbstractModel*] Model used for computations, is an instance of *AbstractModel*.

type [str (read-only)] Name of the model - will be one of the names listed above.

Methods

<code>calibrate(data, settings)</code>	Duplicates of the <code>fit()</code> method.
<code>check_if_initialized()</code>	Check if model is initialized.
<code>estimate(timepoints, individual_parameters, *)</code>	Return the model values for individuals characterized by their individual parameters z_i at time-points $(t_{i,j})_j$.
<code>estimate_ages_from_biomarker_values(...[, ...])</code>	For individuals characterized by their individual parameters z_i , returns the age $t_{i,j}$ at which a given feature value $y_{i,j,k}$ is reached.
<code>fit(data, settings)</code>	Estimate the model's parameters θ for a given dataset and a given algorithm.
<code>load(path_to_model_settings)</code>	Instantiate a Leaspy object from json model parameter file or the corresponding dictionary.
<code>personalize(data, settings, *[, return_noise])</code>	From a model, estimate individual parameters for each <i>ID</i> of a given dataset.
<code>save(path, **kwargs)</code>	Save Leaspy object as json model parameter file.
<code>simulate(individual_parameters, data, settings)</code>	Generate longitudinal synthetic patients data from a given model, a given collection of individual parameters and some given settings.

3.2 leaspy.models: Models

Available models in *Leaspy*.

<code>model_factory.ModelFactory()</code>	Return the wanted model given its name.
<code>abstract_model.AbstractModel(name, **kwargs)</code>	Contains the common attributes & methods of the different models.
<code>univariate_model.UnivariateModel(name, **kwargs)</code>	Univariate (logistic or linear) model for a single variable of interest.
<code>abstract_multivariate_model.AbstractMultivariateModel(...)</code>	Contains the common attributes & methods of the multivariate models.
<code>multivariate_model.MultivariateModel(name, ...)</code>	Manifold model for multiple variables of interest (logistic or linear formulation).
<code>multivariate_parallel_model.MultivariateParallelModel(...)</code>	Logistic model for multiple variables of interest, imposing same average evolution pace for all variables (logistic curves are only time-shifted).

continues on next page

Table 4 – continued from previous page

<code>lme_model.LMEModel(name, **kwargs)</code>	LMEModel is a benchmark model that fits and personalize a linear mixed-effects model
<code>constant_model.ConstantModel(name, **kwargs)</code>	<i>ConstantModel</i> is a benchmark model that predicts constant values (no matter what the patient's ages are).

3.2.1 leaspy.models.model_factory.ModelFactory

class ModelFactory

Bases: `object`

Return the wanted model given its name.

Methods

<code>model(name, **kwargs)</code>	Return the model object corresponding to 'name' arg with possible <i>kwargs</i>
------------------------------------	---

`static model(name: str, **kwargs) → AbstractModel`

Return the model object corresponding to 'name' arg with possible *kwargs*

Check name type and value.

Parameters

name [str] The model's name.

****kwargs** Contains model's hyper-parameters. Raise an error if the keyword is inappropriate for the given model's name.

Returns

AbstractModel A child class object of `models.AbstractModel` class object determined by 'name'.

Raises

`LeaspyModelError` if incorrect model requested.

See also:

`Leaspy`

3.2.2 leaspy.models.abstract_model.AbstractModel

class AbstractModel(name: str, **kwargs)

Bases: `abc.ABC`

Contains the common attributes & methods of the different models.

Parameters

name [str] The name of the model

****kwargs** Hyperparameters for the model

Attributes

is_initialized [bool] Indicates if the model is initialized
name [str] The model's name
features [list[str]] Names of the model features
parameters [dict] Contains the model's parameters
noise_model [str] The noise structure for the model. cf. `NoiseModel` to see possible values.
regularization_distribution_factory [function dist params -> `torch.distributions.Distribution`] Factory of torch distribution to compute log-likelihoods for regularization (gaussian by default)

Methods

<code>compute_individual_ages_from_biomarker_val</code>	For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters).
<code>compute_individual_ages_from_biomarker_val</code>	For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs
<code>compute_individual_attachment_tensorized</code> (...)	Compute attachment term (per subject)
<code>compute_individual_tensorized</code> (timepoints, ...)	Compute the individual values at timepoints according to the model.
<code>compute_individual_trajectory</code> (timepoints, ...)	Compute scores values at the given time-point(s) given a subject's individual parameters.
<code>compute_jacobian_tensorized</code> (timepoints, ...)	Compute the jacobian of the model w.r.t.
<code>compute_regularity_realization</code> (realization)	Compute regularity term for a <code>Realization</code> instance.
<code>compute_regularity_variable</code> (value, mean, std)	Compute regularity term (Gaussian distribution), low-level.
<code>compute_sufficient_statistics</code> (data, realizations)	Compute sufficient statistics from realizations
<code>compute_sum_squared_per_ft_tensorized</code> (..., ...)	Compute the square of the residuals per subject per feature
<code>compute_sum_squared_tensorized</code> (dataset, ...)	Compute the square of the residuals per subject
<code>get_individual_realization_names</code> ()	Get names of individual variables of the model.
<code>get_param_from_real</code> (realizations)	Get individual parameters realizations from all model realizations
<code>get_population_realization_names</code> ()	Get names of population variables of the model.
<code>initialize</code> (dataset[, method])	Initialize the model given a dataset and an initialization method.
<code>initialize_realizations_for_model</code> (...)	Initialize a <code>CollectionRealization</code> used during model fitting or mode/mean realization personalization.
<code>load_hyperparameters</code> (hyperparameters)	Load model's hyperparameters
<code>load_parameters</code> (parameters)	Instantiate or update the model's parameters.
<code>move_to_device</code> (device)	Move a model and its relevant attributes to the specified device.
<code>random_variable_informations</code> ()	Information on model's random variables.
<code>save</code> (path, **kwargs)	Save Leaspy object as json model parameter file.

continues on next page

Table 6 – continued from previous page

<code>smart_initialization_realizations</code> (dataset, ...)	Smart initialization of realizations if needed (input may be modified in-place).
<code>time_reparametrization</code> (timepoints, xi, tau)	Tensorized time reparametrization formula
<code>update_model_parameters_burn_in</code> (data, ...)	Update model parameters (burn-in phase)
<code>update_model_parameters_normal</code> (data, suff_stats)	Update model parameters (after burn-in phase)

compute_individual_ages_from_biomarker_values(*value*: Union[float, List[float]], *individual_parameters*: Dict[str, Any], *feature*: Optional[str] = None)

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters).

Consistency checks are done in the main API layer.

Parameters

value [scalar or array_like[scalar] (list, tuple, numpy.ndarray)] Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a scalar or array_like

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

torch.Tensor Contains the subject's ages computed at the given values(s) Shape of tensor is (1, n_values)

Raises

LeaspyModelError if computation is tried on more than 1 individual

abstract compute_individual_ages_from_biomarker_values_tensorized(*value*: torch.FloatTensor, *individual_parameters*: Dict[str, torch.FloatTensor], *feature*: Optional[str]) → torch.FloatTensor

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs

Parameters

value [torch.Tensor of shape (1, n_values)] Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a torch.Tensor

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

torch.Tensor Contains the subject's ages computed at the given values(s) Shape of tensor is (n_values, 1)

```
compute_individual_attachment_tensorized(data: Dataset, param_ind: DictParamsTorch, *,  
                                         attribute_type) → torch.FloatTensor
```

Compute attachment term (per subject)

Parameters

data [Dataset] Contains the data of the subjects, in particular the subjects' time-points and the mask for nan values & padded visits

param_ind [dict] Contain the individual parameters

attribute_type [Any] Flag to ask for MCMC attributes instead of model's attributes.

Returns

attachment [torch.Tensor] Negative Log-likelihood, shape = (n_subjects,)

Raises

LeaspyModelError If invalid *noise_model* for model

```
abstract compute_individual_tensorized(timepoints: torch.FloatTensor, individual_parameters:  
                                         Dict[str, torch.FloatTensor], *, attribute_type=None) →  
                                         torch.FloatTensor
```

Compute the individual values at timepoints according to the model.

Parameters

timepoints [torch.Tensor] of shape (n_individuals, n_timepoints)]

individual_parameters [dict[param_name: str, torch.Tensor] of shape (n_individuals, n_dims_param)]]

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals, n_timepoints, n_features)

```
compute_individual_trajectory(timepoints, individual_parameters: Dict[str, Any], *, skip_ips_checks:  
                                         bool = False)
```

Compute scores values at the given time-point(s) given a subject's individual parameters.

Parameters

timepoints [scalar or array_like[scalar] (list, tuple, numpy.ndarray)] Contains the age(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a scalar or array_like

skip_ips_checks [bool (default: False)] Flag to skip consistency/compatibility checks and tensorization of individual_parameters when it was done earlier (speed-up)

Returns

torch.Tensor Contains the subject's scores computed at the given age(s) Shape of tensor is (1, n_tpts, n_features)

Raises

LeaspyModelError if computation is tried on more than 1 individual

LeaspyIndividualParamsInputError if invalid individual parameters

```
abstract compute_jacobian_tensorized(timepoints: torch.FloatTensor, individual_parameters:
    Dict[str, torch.FloatTensor], *, attribute_type=None) →
    torch.FloatTensor
```

Compute the jacobian of the model w.r.t. each individual parameter.

This function aims to be used in [ScipyMinimize](#) to speed up optimization.

TODO: as most of numerical operations are repeated when computing model & jacobian, we should create a single method that is able to compute model & jacobian “together” (= efficiently) when requested with a flag for instance.

Parameters

timepoints [torch.Tensor of shape (n_individuals, n_timepoints)]
individual_parameters [dict[param_name: str, torch.Tensor of shape (n_individuals, n_dims_param)]]
attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model’s attributes.

Returns

dict[param_name: str, [class:torch.Tensor of shape (n_individuals, n_timepoints, n_features, n_dims_param)]]

compute_regularity_realization(realization: Realization)

Compute regularity term for a [Realization](#) instance.

Parameters

realization [[Realization](#)]

Returns

torch.Tensor of the same shape as *realization.tensor_realizations*

compute_regularity_variable(value: torch.FloatTensor, mean: torch.FloatTensor, std: torch.FloatTensor) → torch.FloatTensor

Compute regularity term (Gaussian distribution), low-level.

TODO: should be encapsulated in a RandomVariableSpecification class together with other specs of RV.

Parameters

value, mean, std [torch.Tensor of same shapes]

Returns

torch.Tensor of same shape than input

abstract compute_sufficient_statistics(data: Dataset, realizations: CollectionRealization) → DictParamsTorch

Compute sufficient statistics from realizations

Parameters

data [[Dataset](#)]
realizations [[CollectionRealization](#)]

Returns

dict[suff_stat: str, [class:torch.Tensor]]

compute_sum_squared_per_ft_tensorized(*dataset*: Dataset, *param_ind*: DictParamsTorch, *,
attribute_type=None) → torch.FloatTensor

Compute the square of the residuals per subject per feature

Parameters

dataset [Dataset] Contains the data of the subjects, in particular the subjects' time-points and the mask (?)

param_ind [dict] Contain the individual parameters

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals,dimension) Contains L2 residual for each subject and each feature

compute_sum_squared_tensorized(*dataset*: Dataset, *param_ind*: DictParamsTorch, *,
attribute_type=None) → torch.FloatTensor

Compute the square of the residuals per subject

Parameters

dataset [Dataset] Contains the data of the subjects, in particular the subjects' time-points and the mask (?)

param_ind [dict] Contain the individual parameters

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals,) Contains L2 residual for each subject

get_individual_realization_names() → List[str]

Get names of individual variables of the model.

Returns

list[str]

get_param_from_real(*realizations*: CollectionRealization) → Dict[str, torch.FloatTensor]

Get individual parameters realizations from all model realizations

<!> The tensors are not cloned and so a link continue to exist between the individual parameters and the underlying tensors of realizations.

Parameters

realizations [CollectionRealization]

Returns

dict[param_name: str, [class:torch.Tensor [n_individuals, dims_param]]] Individual parameters

get_population_realization_names() → List[str]

Get names of population variables of the model.

Returns

list[str]

abstract initialize(dataset: Dataset, method: str = 'default') → None

Initialize the model given a dataset and an initialization method.

After calling this method `is_initialized` should be True and model should be ready for use.

Parameters

dataset [Dataset] The dataset we want to initialize from.

method [str] A custom method to initialize the model

initialize_realizations_for_model(n_individuals: int, **init_kws) → CollectionRealization

Initialize a `CollectionRealization` used during model fitting or mode/mean realization personalization.

Parameters

n_individuals [int] Number of individuals to track

****init_kws** Keyword arguments passed to `CollectionRealization.initialize()`. (In particular `individual_variable_init_at_mean` to “initialize at mean” or `skip_variable` to filter some variables)

Returns

`CollectionRealization`

abstract load_hyperparameters(hyperparameters: Dict[str, Any]) → None

Load model’s hyperparameters

Parameters

hyperparameters [dict[str, Any]] Contains the model’s hyperparameters

Raises

`LeaspyModelError` If any of the consistency checks fail.

load_parameters(parameters: Dict[str, Any]) → None

Instantiate or update the model’s parameters.

Parameters

parameters [dict[str, Any]] Contains the model’s parameters

move_to_device(device: torch.device) → None

Move a model and its relevant attributes to the specified device.

Parameters

device [torch.device]

abstract random_variable_informations() → Dict[str, Any]

Information on model’s random variables.

Returns

`dict[str, Any]`

- **name: str** Name of the random variable
- **type: ‘population’ or ‘individual’** Individual or population random variable?
- **shape: tuple[int, ...]** Shape of the variable (only 1D for individual and 1D or 2D for pop. are supported)
- **rv_type: str** An indication (not used in code) on the probability distribution used for the var (only Gaussian is supported)

- **scale: optional float** The fixed scale to use for initial std-dev in the corresponding sampler. When not defined, sampler will rely on scales estimated at model initialization. cf. `GibbsSampler`

abstract `save(path: str, **kwargs) → None`

Save Leaspy object as json model parameter file.

Parameters

path [str] Path to store the model's parameters.

****kwargs** Keyword arguments for json.dump method.

smart_initialization_realizations(*dataset*: Dataset, *realizations*: CollectionRealization) → CollectionRealization

Smart initialization of realizations if needed (input may be modified in-place).

Default behavior to return *realizations* as they are (no smart trick).

Parameters

dataset [Dataset]

realizations [CollectionRealization]

Returns

CollectionRealization

static `time_reparametrization(timepoints: torch.FloatTensor, xi: torch.FloatTensor, tau: torch.FloatTensor) → torch.FloatTensor`

Tensorized time reparametrization formula

<!> Shapes of tensors must be compatible between them.

Parameters

timepoints [torch.Tensor] Timepoints to reparametrize

xi [torch.Tensor] Log-acceleration of individual(s)

tau [torch.Tensor] Time-shift(s)

Returns

torch.Tensor of same shape as *timepoints*

abstract `update_model_parameters_burn_in(data: Dataset, realizations: CollectionRealization) → None`

Update model parameters (burn-in phase)

Parameters

data [Dataset]

realizations [CollectionRealization]

abstract `update_model_parameters_normal(data: Dataset, suff_stats: DictParamsTorch) → None`

Update model parameters (after burn-in phase)

Parameters

data [Dataset]

suff_stats [dict[suff_stat: str, torch.Tensor]]

3.2.3 `leaspy.models.univariate_model.UnivariateModel`

```
class UnivariateModel(name: str, **kwargs)
    Bases: leaspy.models.abstract_model.AbstractModel
```

Univariate (logistic or linear) model for a single variable of interest.

Parameters

- `name` [str] Name of the model
- `**kwargs` Hyperparameters of the model

Raises

`LeaspyModelError`

- If `name` is not one of allowed sub-type: ‘univariate_linear’ or ‘univariate_logistic’
- If hyperparameters are inconsistent

Methods

<code>compute_individual_ages_from_biomarker_val</code>	For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters).
<code>compute_individual_ages_from_biomarker_val</code>	For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs
<code>compute_individual_ages_from_biomarker_val</code>	For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs
<code>compute_individual_attachment_tensorized</code> (...)	Compute attachment term (per subject)
<code>compute_individual_tensorized</code> (timepoints, ...)	Compute the individual values at timepoints according to the model.
<code>compute_individual_tensorized_linear</code> (..., ...)	Compute the individual values at timepoints according to the model (linear).
<code>compute_individual_tensorized_logistic</code> (...)	Compute the individual values at timepoints according to the model (logistic).
<code>compute_individual_trajectory</code> (timepoints, ...)	Compute scores values at the given time-point(s) given a subject's individual parameters.
<code>compute_jacobian_tensorized</code> (timepoints, ...)	Compute the jacobian of the model w.r.t.
<code>compute_jacobian_tensorized_linear</code> (..., ...)	Compute the jacobian of the model (linear) w.r.t.
<code>compute_jacobian_tensorized_logistic</code> (..., ...)	Compute the jacobian of the model (logistic) w.r.t.
<code>compute_mean_traj</code> (timepoints, *[..., ...])	Compute trajectory of the model with individual parameters being the group-average ones.
<code>compute_regularity_realization</code> (realization)	Compute regularity term for a <code>Realization</code> instance.
<code>compute_regularity_variable</code> (value, mean, std)	Compute regularity term (Gaussian distribution), low-level.
<code>compute_sufficient_statistics</code> (data, realizations)	Compute sufficient statistics from realizations

continues on next page

Table 7 – continued from previous page

<code>compute_sum_squared_per_ft_tensorized(...[, ...])</code>	Compute the square of the residuals per subject per feature
<code>compute_sum_squared_tensorized(dataset, ...)</code>	Compute the square of the residuals per subject
<code>get_individual_realization_names()</code>	Get names of individual variables of the model.
<code>get_param_from_real(realizations)</code>	Get individual parameters realizations from all model realizations
<code>get_population_realization_names()</code>	Get names of population variables of the model.
<code>initialize(dataset[, method])</code>	Initialize the model given a dataset and an initialization method.
<code>initialize_MCMC_toolbox()</code>	Initialize Monte-Carlo Markov-Chain toolbox for calibration of model
<code>initialize_realizations_for_model(...)</code>	Initialize a <code>CollectionRealization</code> used during model fitting or mode/mean realization personalization.
<code>load_hyperparameters(hyperparameters)</code>	Load model's hyperparameters
<code>load_parameters(parameters)</code>	Instantiate or update the model's parameters.
<code>move_to_device(device)</code>	Move a model and its relevant attributes to the specified device.
<code>random_variable_informations()</code>	Information on model's random variables.
<code>save(path, **kwargs)</code>	Save Leaspy object as json model parameter file.
<code>smart_initialization_realizations(dataset, ...)</code>	Smart initialization of realizations if needed (input may be modified in-place).
<code>time_reparametrization(timepoints, xi, tau)</code>	Tensorized time reparametrization formula
<code>update_MCMC_toolbox(...)</code>	Update the MCMC toolbox with a collection of realizations of model population parameters.
<code>update_model_parameters_burn_in(data, ...)</code>	Update model parameters (burn-in phase)
<code>update_model_parameters_normal(data, suff_stats)</code>	Update model parameters (after burn-in phase)

`compute_individual_ages_from_biomarker_values(value: Union[float, List[float]], individual_parameters: Dict[str, Any], feature: Optional[str] = None)`

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters).

Consistency checks are done in the main API layer.

Parameters

value [scalar or array_like[scalar] (list, tuple, `numpy.ndarray`)] Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a scalar or array_like

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

torch.Tensor Contains the subject's ages computed at the given values(s) Shape of tensor is (1, n_values)

Raises

LeaspyModelError if computation is tried on more than 1 individual

compute_individual_ages_from_biomarker_values_tensorized(*value*: *Tensor*,
individual_parameters: *dict*,
feature: *str*)

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs

Parameters

value [torch.Tensor of shape (1, n_values)] Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a torch.Tensor

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

torch.Tensor Contains the subject's ages computed at the given values(s) Shape of tensor is (n_values, 1)

compute_individual_ages_from_biomarker_values_tensorized_logistic(*value*: *Tensor*,
individual_parameters: *dict*,
feature: *str*)

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs

Parameters

value [torch.Tensor of shape (1, n_values)] Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a torch.Tensor

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

torch.Tensor Contains the subject's ages computed at the given values(s) Shape of tensor is (n_values, 1)

compute_individual_attachment_tensorized(*data*: *Dataset*, *param_ind*: *DictParamsTorch*, *,
attribute_type) → torch.FloatTensor

Compute attachment term (per subject)

Parameters

data [*Dataset*] Contains the data of the subjects, in particular the subjects' time-points and the mask for nan values & padded visits

param_ind [dict] Contain the individual parameters

attribute_type [Any] Flag to ask for MCMC attributes instead of model's attributes.

Returns

attachment [torch.Tensor] Negative Log-likelihood, shape = (n_subjects,)

Raises

LeaspyModelError If invalid *noise_model* for model

compute_individual_tensorized(*timepoints*, *individual_parameters*, *, *attribute_type=None*)

Compute the individual values at timepoints according to the model.

Parameters

timepoints [`torch.Tensor` of shape (n_individuals, n_timepoints)]
individual_parameters [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]
attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

`torch.Tensor` of shape (n_individuals, n_timepoints, n_features)

compute_individual_tensorized_linear(timepoints, individual_parameters, *, attribute_type=None)
Compute the individual values at timepoints according to the model (linear).

Parameters

timepoints [`torch.Tensor` of shape (n_individuals, n_timepoints)]
individual_parameters [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]
attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

`torch.Tensor` of shape (n_individuals, n_timepoints, n_features)

compute_individual_tensorized_logistic(timepoints, individual_parameters, *, attribute_type=None)

Compute the individual values at timepoints according to the model (logistic).

Parameters

timepoints [`torch.Tensor` of shape (n_individuals, n_timepoints)]
individual_parameters [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]
attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

`torch.Tensor` of shape (n_individuals, n_timepoints, n_features)

compute_individual_trajectory(timepoints, individual_parameters: `Dict[str, Any]`, *, skip_ips_checks: bool = False)

Compute scores values at the given time-point(s) given a subject's individual parameters.

Parameters

timepoints [scalar or array_like[scalar] (list, tuple, `numpy.ndarray`)] Contains the age(s) of the subject.
individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a scalar or array_like
skip_ips_checks [bool (default: False)] Flag to skip consistency/compatibility checks and tensorization of individual_parameters when it was done earlier (speed-up)

Returns

`torch.Tensor` Contains the subject's scores computed at the given age(s) Shape of tensor is (1, n_tpts, n_features)

Raises

`LeaspyModelError` if computation is tried on more than 1 individual

`LeaspyIndividualParamsInputError` if invalid individual parameters

`compute_jacobian_tensorized(timepoints, individual_parameters, *, attribute_type=None)`

Compute the jacobian of the model w.r.t. each individual parameter.

This function aims to be used in `ScipyMinimize` to speed up optimization.

TODO: as most of numerical operations are repeated when computing model & jacobian, we should create a single method that is able to compute model & jacobian “together” (= efficiently) when requested with a flag for instance.

Parameters

`timepoints` [`torch.Tensor` of shape (n_individuals, n_timepoints)]

`individual_parameters` [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]

`attribute_type` [Any (default None)] Flag to ask for MCMC attributes instead of model’s attributes.

Returns

dict[param_name: str, [class:`torch.Tensor` of shape (n_individuals, n_timepoints, n_features, n_dims_param)]]

`compute_jacobian_tensorized_linear(timepoints, individual_parameters, *, attribute_type=None)`

Compute the jacobian of the model (linear) w.r.t. each individual parameter.

This function aims to be used in `ScipyMinimize` to speed up optimization.

TODO: as most of numerical operations are repeated when computing model & jacobian, we should create a single method that is able to compute model & jacobian “together” (= efficiently) when requested with a flag for instance.

Parameters

`timepoints` [`torch.Tensor` of shape (n_individuals, n_timepoints)]

`individual_parameters` [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]

`attribute_type` [Any (default None)] Flag to ask for MCMC attributes instead of model’s attributes.

Returns

dict[param_name: str, [class:`torch.Tensor` of shape (n_individuals, n_timepoints, n_features, n_dims_param)]]

`compute_jacobian_tensorized_logistic(timepoints, individual_parameters, *, attribute_type=None)`

Compute the jacobian of the model (logistic) w.r.t. each individual parameter.

This function aims to be used in `ScipyMinimize` to speed up optimization.

TODO: as most of numerical operations are repeated when computing model & jacobian, we should create a single method that is able to compute model & jacobian “together” (= efficiently) when requested with a flag for instance.

Parameters

timepoints [`torch.Tensor` of shape (n_individuals, n_timepoints)]
individual_parameters [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]
attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model’s attributes.

Returns

dict[param_name: str, [class:`torch.Tensor` of shape (n_individuals, n_timepoints, n_features, n_dims_param)]]

compute_mean_traj(`timepoints`, *, `attribute_type`: *Optional[str]* = `None`)

Compute trajectory of the model with individual parameters being the group-average ones.

TODO check dimensions of io? TODO generalize in abstract manifold model

Parameters

timepoints [`torch.Tensor` [1, n_timepoints]]
attribute_type ['MCMC' or `None`]

Returns

`torch.Tensor` [1, n_timepoints, dimension] The group-average values at given time-points

compute_regularity_realization(`realization`: `Realization`)

Compute regularity term for a `Realization` instance.

Parameters

`realization` [`Realization`]

Returns

`torch.Tensor` of the same shape as `realization.tensor_realizations`

compute_regularity_variable(`value`: `torch.FloatTensor`, `mean`: `torch.FloatTensor`, `std`: `torch.FloatTensor`) → `torch.FloatTensor`

Compute regularity term (Gaussian distribution), low-level.

TODO: should be encapsulated in a RandomVariableSpecification class together with other specs of RV.

Parameters

`value, mean, std` [`torch.Tensor` of same shapes]

Returns

`torch.Tensor` of same shape than input

compute_sufficient_statistics(`data, realizations`)

Compute sufficient statistics from realizations

Parameters

`data` [`Dataset`]

realizations [*CollectionRealization*]

Returns

dict[suff_stat: str, [class:*torch.Tensor*]]

compute_sum_squared_per_ft_tensorized(*dataset*: *Dataset*, *param_ind*: *DictParamsTorch*, *, *attribute_type*=None) → *torch.FloatTensor*

Compute the square of the residuals per subject per feature

Parameters

dataset [*Dataset*] Contains the data of the subjects, in particular the subjects' time-points and the mask (?)

param_ind [dict] Contain the individual parameters

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals,dimension) Contains L2 residual for each subject and each feature

compute_sum_squared_tensorized(*dataset*: *Dataset*, *param_ind*: *DictParamsTorch*, *, *attribute_type*=None) → *torch.FloatTensor*

Compute the square of the residuals per subject

Parameters

dataset [*Dataset*] Contains the data of the subjects, in particular the subjects' time-points and the mask (?)

param_ind [dict] Contain the individual parameters

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals,) Contains L2 residual for each subject

get_individual_realization_names() → *List[str]*

Get names of individual variables of the model.

Returns

list[str]

get_param_from_real(*realizations*: *CollectionRealization*) → *Dict[str, torch.FloatTensor]*

Get individual parameters realizations from all model realizations

<!> The tensors are not cloned and so a link continue to exist between the individual parameters and the underlying tensors of realizations.

Parameters

realizations [*CollectionRealization*]

Returns

dict[param_name: str, [class:*torch.Tensor* [n_individuals, dims_param]]] Individual parameters

get_population_realization_names() → `List[str]`

Get names of population variables of the model.

Returns

`list[str]`

initialize(dataset, method='default')

Initialize the model given a dataset and an initialization method.

After calling this method `is_initialized` should be True and model should be ready for use.

Parameters

dataset [`Dataset`] The dataset we want to initialize from.

method [str] A custom method to initialize the model

initialize_MCMC_toolbox()

Initialize Monte-Carlo Markov-Chain toolbox for calibration of model

initialize_realizations_for_model(n_individuals: int, **init_kws) → `CollectionRealization`

Initialize a `CollectionRealization` used during model fitting or mode/mean realization personalization.

Parameters

n_individuals [int] Number of individuals to track

****init_kws** Keyword arguments passed to `CollectionRealization.initialize()`.

(In particular `individual_variable_init_at_mean` to “initialize at mean” or `skip_variable` to filter some variables)

Returns

`CollectionRealization`

load_hyperparameters(hyperparameters: dict)

Load model’s hyperparameters

Parameters

hyperparameters [dict[str, Any]] Contains the model’s hyperparameters

Raises

`LeaspyModelError` If any of the consistency checks fail.

load_parameters(parameters)

Instantiate or update the model’s parameters.

Parameters

parameters [dict[str, Any]] Contains the model’s parameters

move_to_device(device: torch.device) → `None`

Move a model and its relevant attributes to the specified device.

Parameters

device [torch.device]

random_variable_informations()

Information on model’s random variables.

Returns

`dict[str, Any]`

- **name: str** Name of the random variable
- **type: ‘population’ or ‘individual’** Individual or population random variable?
- **shape: tuple[int, ...]** Shape of the variable (only 1D for individual and 1D or 2D for pop. are supported)
- **rv_type: str** An indication (not used in code) on the probability distribution used for the var (only Gaussian is supported)
- **scale: optional float** The fixed scale to use for initial std-dev in the corresponding sampler. When not defined, sampler will rely on scales estimated at model initialization. cf. `GibbsSampler`

save(*path: str*, ***kwargs*)

Save Leaspy object as json model parameter file.

Parameters

path [str] Path to store the model’s parameters.

****kwargs** Keyword arguments for json.dump method.

smart_initialization_realizations(*dataset: Dataset*, *realizations: CollectionRealization*) → *CollectionRealization*

Smart initialization of realizations if needed (input may be modified in-place).

Default behavior to return *realizations* as they are (no smart trick).

Parameters

dataset [*Dataset*]

realizations [*CollectionRealization*]

Returns

CollectionRealization

static time_reparametrization(*timepoints: torch.FloatTensor*, *xi: torch.FloatTensor*, *tau: torch.FloatTensor*) → *torch.FloatTensor*

Tensorized time reparametrization formula

<!> Shapes of tensors must be compatible between them.

Parameters

timepoints [*torch.Tensor*] Timepoints to reparametrize

xi [*torch.Tensor*] Log-acceleration of individual(s)

tau [*torch.Tensor*] Time-shift(s)

Returns

torch.Tensor of same shape as *timepoints*

update_MCMC_toolbox(*name_of_the_variables_that_have_been_changed*, *realizations*)

Update the MCMC toolbox with a collection of realizations of model population parameters.

TODO to move in the MCMC-fit algorithm

Parameters

name_of_the_variables_that_have_been_changed [container[str] (list, tuple, ...)]

Names of the population parameters to update in MCMC toolbox

realizations [*CollectionRealization*] All the realizations to update MCMC toolbox with

update_model_parameters_burn_in(*data, realizations*)
Update model parameters (burn-in phase)

Parameters

data [*Dataset*]
realizations [*CollectionRealization*]

update_model_parameters_normal(*data, suff_stats*)
Update model parameters (after burn-in phase)

Parameters

data [*Dataset*]
suff_stats [dict[suff_stat: str, *torch.Tensor*]]

3.2.4 `leaspy.models.abstract_multivariate_model.AbstractMultivariateModel`

class AbstractMultivariateModel(*name: str, **kwargs*)
Bases: `leaspy.models.abstract_model.AbstractModel`

Contains the common attributes & methods of the multivariate models.

Parameters

name [str] Name of the model
****kwargs** Hyperparameters for the model

Raises

LeaspyModelError if inconsistent hyperparameters

Methods

<code>compute_individual_ages_from_biomarker_val</code>	For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters).
<code>compute_individual_ages_from_biomarker_val</code>	For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs
<code>compute_individual_attachment_tensorized</code>	Compute attachment term (per subject)
<code>compute_individual_tensorized</code> (timepoints, ...)	Compute the individual values at timepoints according to the model.
<code>compute_individual_trajectory</code> (timepoints, ...)	Compute scores values at the given time-point(s) given a subject's individual parameters.
<code>compute_jacobian_tensorized</code> (timepoints, ...)	Compute the jacobian of the model w.r.t.
<code>compute_mean_traj</code> (timepoints, *[...,])	Compute trajectory of the model with individual parameters being the group-average ones.
<code>compute_regularity_realization</code> (realization)	Compute regularity term for a <i>Realization</i> instance.

continues on next page

Table 8 – continued from previous page

<code>compute_regularity_variable</code> (value, mean, std)	Compute regularity term (Gaussian distribution), low-level.
<code>compute_sufficient_statistics</code> (data, realizations)	Compute sufficient statistics from realizations
<code>compute_sum_squared_per_ft_tensorized</code> (..., ...)	Compute the square of the residuals per subject per feature
<code>compute_sum_squared_tensorized</code> (dataset, ...)	Compute the square of the residuals per subject
<code>get_individual_realization_names()</code>	Get names of individual variables of the model.
<code>get_param_from_real</code> (realizations)	Get individual parameters realizations from all model realizations
<code>get_population_realization_names()</code>	Get names of population variables of the model.
<code>initialize</code> (dataset[, method])	Initialize the model given a dataset and an initialization method.
<code>initialize_MCMC_toolbox()</code>	Initialize Monte-Carlo Markov-Chain toolbox for calibration of model
<code>initialize_realizations_for_model</code> (...)	Initialize a <code>CollectionRealization</code> used during model fitting or mode/mean realization personalization.
<code>load_hyperparameters</code> (hyperparameters)	Load model's hyperparameters
<code>load_parameters</code> (parameters)	Instantiate or update the model's parameters.
<code>move_to_device</code> (device)	Move a model and its relevant attributes to the specified device.
<code>random_variable_informations</code> ()	Information on model's random variables.
<code>save</code> (path[, with_mixing_matrix])	Save Leaspy object as json model parameter file.
<code>smart_initialization_realizations</code> (dataset, ...)	Smart initialization of realizations if needed (input may be modified in-place).
<code>time_reparametrization</code> (timepoints, xi, tau)	Tensorized time reparametrization formula
<code>update_MCMC_toolbox</code> (...)	Update the MCMC toolbox with a collection of realizations of model population parameters.
<code>update_model_parameters_burn_in</code> (data, ...)	Update model parameters (burn-in phase)
<code>update_model_parameters_normal</code> (data, suff_stats)	Update model parameters (after burn-in phase)

`compute_individual_ages_from_biomarker_values`(value: *Union[float, List[float]]*, individual_parameters: *Dict[str, Any]*, feature: *Optional[str] = None*)

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters).

Consistency checks are done in the main API layer.

Parameters

value [scalar or array_like[scalar] (list, tuple, `numpy.ndarray`)] Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a scalar or array_like

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

`torch.Tensor` Contains the subject's ages computed at the given values(s) Shape of tensor is (1, n_values)

Raises

LeaspyModelError if computation is tried on more than 1 individual

abstract compute_individual_ages_from_biomarker_values_tensorized(*value*:
 torch.FloatTensor,
 individual_parameters:
 Dict[str, torch.FloatTensor],
 feature: *Optional[str]*)
 → *torch.FloatTensor*

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs

Parameters

value [*torch.Tensor* of shape (1, n_values)] Contains the biomarker value(s) of the subject.

individual_parameters [*dict*] Contains the individual parameters. Each individual parameter should be a *torch.Tensor*

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

torch.Tensor Contains the subject's ages computed at the given values(s) Shape of tensor is (n_values, 1)

compute_individual_attachment_tensorized(*data*: *Dataset*, *param_ind*: *DictParamsTorch*, *,
 attribute_type) → *torch.FloatTensor*

Compute attachment term (per subject)

Parameters

data [*Dataset*] Contains the data of the subjects, in particular the subjects' time-points and the mask for nan values & padded visits

param_ind [*dict*] Contain the individual parameters

attribute_type [Any] Flag to ask for MCMC attributes instead of model's attributes.

Returns

attachment [*torch.Tensor*] Negative Log-likelihood, shape = (n_subjects,)

Raises

LeaspyModelError If invalid *noise_model* for model

abstract compute_individual_tensorized(*timepoints*, *individual_parameters*, *,
 attribute_type=None) → *torch.FloatTensor*

Compute the individual values at timepoints according to the model.

Parameters

timepoints [*torch.Tensor* of shape (n_individuals, n_timepoints)]

individual_parameters [*dict*[*param_name*: str, *torch.Tensor* of shape (n_individuals, n_dims_param)]]

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals, n_timepoints, n_features)

compute_individual_trajectory(timepoints, individual_parameters: *Dict[str, Any]*, *, skip_ips_checks: *bool* = False)

Compute scores values at the given time-point(s) given a subject's individual parameters.

Parameters

timepoints [scalar or array_like[scalar] (list, tuple, *numpy.ndarray*) Contains the age(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a scalar or array_like

skip_ips_checks [bool (default: False)] Flag to skip consistency/compatibility checks and tensorization of individual_parameters when it was done earlier (speed-up)

Returns

torch.Tensor Contains the subject's scores computed at the given age(s) Shape of tensor is (1, n_tpts, n_features)

Raises

LeaspyModelError if computation is tried on more than 1 individual

LeaspyIndividualParamsInputError if invalid individual parameters

abstract compute_jacobian_tensorized(timepoints: *torch.FloatTensor*, individual_parameters: *Dict[str, torch.FloatTensor]*, *, attribute_type=None) → *torch.FloatTensor*

Compute the jacobian of the model w.r.t. each individual parameter.

This function aims to be used in *ScipyMinimize* to speed up optimization.

TODO: as most of numerical operations are repeated when computing model & jacobian, we should create a single method that is able to compute model & jacobian “together” (= efficiently) when requested with a flag for instance.

Parameters

timepoints [*torch.Tensor* of shape (n_individuals, n_timepoints)]

individual_parameters [dict[param_name: str, *torch.Tensor* of shape (n_individuals, n_dims_param)]]

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

dict[param_name: str, [class:*torch.Tensor* of shape (n_individuals, n_timepoints, n_features, n_dims_param)]]

compute_mean_traj(timepoints, *, attribute_type: *Optional[str]* = None)

Compute trajectory of the model with individual parameters being the group-average ones.

TODO check dimensions of io?

Parameters

timepoints [*torch.Tensor* [1, n_timepoints]]

attribute_type ['MCMC' or None]

Returns

torch.Tensor [1, n_timepoints, dimension] The group-average values at given time-points

compute_regularity_realization(realization: Realization)

Compute regularity term for a *Realization* instance.

Parameters

realization [Realization]

Returns

torch.Tensor of the same shape as realization.tensor_realizations

compute_regularity_variable(value: torch.FloatTensor, mean: torch.FloatTensor, std: torch.FloatTensor) → torch.FloatTensor

Compute regularity term (Gaussian distribution), low-level.

TODO: should be encapsulated in a RandomVariableSpecification class together with other specs of RV.

Parameters

value, mean, std [torch.Tensor of same shapes]

Returns

torch.Tensor of same shape than input

abstract compute_sufficient_statistics(data: Dataset, realizations: CollectionRealization) → DictParamsTorch

Compute sufficient statistics from realizations

Parameters

data [Dataset]

realizations [CollectionRealization]

Returns

dict[suff_stat: str, [class:torch.Tensor]]

compute_sum_squared_per_ft_tensorized(dataset: Dataset, param_ind: DictParamsTorch, *, attribute_type=None) → torch.FloatTensor

Compute the square of the residuals per subject per feature

Parameters

dataset [Dataset] Contains the data of the subjects, in particular the subjects' time-points and the mask (?)

param_ind [dict] Contain the individual parameters

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals,dimension) Contains L2 residual for each subject and each feature

compute_sum_squared_tensorized(dataset: Dataset, param_ind: DictParamsTorch, *, attribute_type=None) → torch.FloatTensor

Compute the square of the residuals per subject

Parameters

dataset [Dataset] Contains the data of the subjects, in particular the subjects' time-points and the mask (?)

param_ind [dict] Contain the individual parameters

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals,) Contains L2 residual for each subject

get_individual_realization_names() → List[str]

Get names of individual variables of the model.

Returns

list[str]

get_param_from_real(realizations: CollectionRealization) → Dict[str, torch.FloatTensor]

Get individual parameters realizations from all model realizations

<!> The tensors are not cloned and so a link continue to exist between the individual parameters and the underlying tensors of realizations.

Parameters

realizations [CollectionRealization]

Returns

dict[param_name: str, [class:torch.Tensor [n_individuals, dims_param]]] Individual parameters

get_population_realization_names() → List[str]

Get names of population variables of the model.

Returns

list[str]

initialize(dataset, method: str = 'default')

Initialize the model given a dataset and an initialization method.

After calling this method `is_initialized` should be True and model should be ready for use.

Parameters

dataset [Dataset] The dataset we want to initialize from.

method [str] A custom method to initialize the model

abstract initialize_MCMC_toolbox() → None

Initialize Monte-Carlo Markov-Chain toolbox for calibration of model

initialize_realizations_for_model(n_individuals: int, **init_kw) → CollectionRealization

Initialize a `CollectionRealization` used during model fitting or mode/mean realization personalization.

Parameters

n_individuals [int] Number of individuals to track

****init_kws** Keyword arguments passed to `CollectionRealization.initialize()`.
(In particular `individual_variable_init_at_mean` to “initialize at mean” or
`skip_variable` to filter some variables)

Returns

`CollectionRealization`

load_hyperparameters(`hyperparameters: Dict[str, Any]`)

Load model’s hyperparameters

Parameters

hyperparameters [dict[str, Any]] Contains the model’s hyperparameters

Raises

LeaspyModelError If any of the consistency checks fail.

load_parameters(`parameters: Dict[str, Any]`) → None

Instantiate or update the model’s parameters.

Parameters

parameters [dict[str, Any]] Contains the model’s parameters

move_to_device(`device: torch.device`) → None

Move a model and its relevant attributes to the specified device.

Parameters

device [torch.device]

abstract random_variable_informations() → Dict[str, Any]

Information on model’s random variables.

Returns

dict[str, Any]

- **name: str** Name of the random variable
- **type: ‘population’ or ‘individual’** Individual or population random variable?
- **shape: tuple[int, ...]** Shape of the variable (only 1D for individual and 1D or 2D for pop. are supported)
- **rv_type: str** An indication (not used in code) on the probability distribution used for the var (only Gaussian is supported)
- **scale: optional float** The fixed scale to use for initial std-dev in the corresponding sampler. When not defined, sampler will rely on scales estimated at model initialization. cf. `GibbsSampler`

save(`path: str, with_mixing_matrix: bool = True, **kwargs`)

Save Leaspy object as json model parameter file.

Parameters

path [str] Path to store the model’s parameters.

with_mixing_matrix [bool (default True)] Save the mixing matrix in the exported file in its ‘parameters’ section. <!> It is not a real parameter and its value will be overwritten at model loading (orthonormal basis is recomputed from other “true” parameters and mixing matrix is then deduced from this orthonormal basis and the betas)! It was

integrated historically because it is used for convenience in browser webtool and only there...

****kwargs** Keyword arguments for json.dump method. Default to: dict(indent=2)

smart_initialization_realizations(*dataset*: Dataset, *realizations*: CollectionRealization) → CollectionRealization

Smart initialization of realizations if needed (input may be modified in-place).

Default behavior to return *realizations* as they are (no smart trick).

Parameters

dataset [Dataset]

realizations [CollectionRealization]

Returns

CollectionRealization

static time_reparametrization(*timepoints*: torch.FloatTensor, *xi*: torch.FloatTensor, *tau*: torch.FloatTensor) → torch.FloatTensor

Tensorized time reparametrization formula

<!> Shapes of tensors must be compatible between them.

Parameters

timepoints [torch.Tensor] Timepoints to reparametrize

xi [torch.Tensor] Log-acceleration of individual(s)

tau [torch.Tensor] Time-shift(s)

Returns

torch.Tensor of same shape as *timepoints*

abstract update_MCMC_toolbox(*name_of_the_variables_that_have_been_changed*: List[str], *realizations*) → None

Update the MCMC toolbox with a collection of realizations of model population parameters.

Parameters

name_of_the_variables_that_have_been_changed [container[str] (list, tuple, ...)]
Names of the population parameters to update in MCMC toolbox

realizations [CollectionRealization] All the realizations to update MCMC toolbox with

abstract update_model_parameters_burn_in(*data*: Dataset, *realizations*: CollectionRealization) → None

Update model parameters (burn-in phase)

Parameters

data [Dataset]

realizations [CollectionRealization]

abstract update_model_parameters_normal(*data*: Dataset, *suff_stats*: DictParamsTorch) → None

Update model parameters (after burn-in phase)

Parameters

data [Dataset]

```
suff_stats [dict[suff_stat: str, torch.Tensor]]
```

3.2.5 `leaspy.models.multivariate_model.MultivariateModel`

```
class MultivariateModel(name: str, **kwargs)
Bases: leaspy.models.abstract_multivariate_model.AbstractMultivariateModel
```

Manifold model for multiple variables of interest (logistic or linear formulation).

Parameters

`name` [str] Name of the model
`**kwargs` Hyperparameters of the model

Raises

`LeaspyModelError`

- If `name` is not one of allowed sub-type: ‘univariate_linear’ or ‘univariate_logistic’
- If hyperparameters are inconsistent

Methods

<code>compute_individual_ages_from_biomarker_val</code>	For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters).
<code>compute_individual_ages_from_biomarker_val</code>	For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs
<code>compute_individual_ages_from_biomarker_val</code>	For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs
<code>compute_individual_attachment_tensorized</code> (...)	Compute attachment term (per subject)
<code>compute_individual_tensorized</code> (timepoints, ...)	Compute the individual values at timepoints according to the model.
<code>compute_individual_tensorized_linear</code> (..., ...)	Compute the individual values at timepoints according to the model (linear).
<code>compute_individual_tensorized_logistic</code> (...)	Compute the individual values at timepoints according to the model (logistic).
<code>compute_individual_trajectory</code> (timepoints, ...)	Compute scores values at the given time-point(s) given a subject's individual parameters.
<code>compute_jacobian_tensorized</code> (timepoints, ...)	Compute the jacobian of the model w.r.t.
<code>compute_jacobian_tensorized_linear</code> (..., ...)	Compute the jacobian of the model (linear) w.r.t.
<code>compute_jacobian_tensorized_logistic</code> (..., ...)	Compute the jacobian of the model (logistic) w.r.t.
<code>compute_mean_traj</code> (timepoints, *[..., ...])	Compute trajectory of the model with individual parameters being the group-average ones.
<code>compute_regularity_realization</code> (realization)	Compute regularity term for a <code>Realization</code> instance.
<code>compute_regularity_variable</code> (value, mean, std)	Compute regularity term (Gaussian distribution), low-level.

continues on next page

Table 9 – continued from previous page

<code>compute_sufficient_statistics(data, realizations)</code>	Compute sufficient statistics from realizations
<code>compute_sum_squared_per_ft_tensorized(...[, ...])</code>	Compute the square of the residuals per subject per feature
<code>compute_sum_squared_tensorized(dataset, ...)</code>	Compute the square of the residuals per subject
<code>get_individual_realization_names()</code>	Get names of individual variables of the model.
<code>get_param_from_real(realizations)</code>	Get individual parameters realizations from all model realizations
<code>get_population_realization_names()</code>	Get names of population variables of the model.
<code>initialize(dataset[, method])</code>	Initialize the model given a dataset and an initialization method.
<code>initialize_MCMC_toolbox()</code>	Initialize Monte-Carlo Markov-Chain toolbox for calibration of model
<code>initialize_realizations_for_model(...)</code>	Initialize a <code>CollectionRealization</code> used during model fitting or mode/mean realization personalization.
<code>load_hyperparameters(hyperparameters)</code>	Load model's hyperparameters
<code>load_parameters(parameters)</code>	Instantiate or update the model's parameters.
<code>move_to_device(device)</code>	Move a model and its relevant attributes to the specified device.
<code>random_variable_informations()</code>	Information on model's random variables.
<code>save(path[, with_mixing_matrix])</code>	Save Leaspy object as json model parameter file.
<code>smart_INITIALIZATION_realizations(dataset, ...)</code>	Smart initialization of realizations if needed (input may be modified in-place).
<code>time_reparametrization(timepoints, xi, tau)</code>	Tensorized time reparametrization formula
<code>update_MCMC_toolbox(...)</code>	Update the MCMC toolbox with a collection of realizations of model population parameters.
<code>update_model_parameters_burn_in(data, ...)</code>	Update model parameters (burn-in phase)
<code>update_model_parameters_normal(data, suff_stats)</code>	Update model parameters (after burn-in phase)

`compute_individual_ages_from biomarker_values(value: Union[float, List[float]], individual_parameters: Dict[str, Any], feature: Optional[str] = None)`

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters).

Consistency checks are done in the main API layer.

Parameters

value [scalar or array_like[scalar]] (list, tuple, `numpy.ndarray`) Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a scalar or array_like

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

`torch.Tensor` Contains the subject's ages computed at the given values(s) Shape of tensor is (1, n_values)

Raises

LeaspyModelError if computation is tried on more than 1 individual

compute_individual_ages_from_biomarker_values_tensorized(*value*: *Tensor*,
individual_parameters: *dict*,
feature: *str*)

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs

Parameters

value [torch.Tensor of shape (1, n_values)] Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a torch.Tensor

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

torch.Tensor Contains the subject's ages computed at the given values(s) Shape of tensor is (n_values, 1)

compute_individual_ages_from_biomarker_values_tensorized_logistic(*value*: *Tensor*,
individual_parameters: *dict*, *feature*: *str*)

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs

Parameters

value [torch.Tensor of shape (1, n_values)] Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a torch.Tensor

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

torch.Tensor Contains the subject's ages computed at the given values(s) Shape of tensor is (n_values, 1)

compute_individual_attachment_tensorized(*data*: *Dataset*, *param_ind*: *DictParamsTorch*, *,
attribute_type) → torch.FloatTensor

Compute attachment term (per subject)

Parameters

data [*Dataset*] Contains the data of the subjects, in particular the subjects' time-points and the mask for nan values & padded visits

param_ind [dict] Contain the individual parameters

attribute_type [Any] Flag to ask for MCMC attributes instead of model's attributes.

Returns

attachment [torch.Tensor] Negative Log-likelihood, shape = (n_subjects,)

Raises

LeaspyModelError If invalid *noise_model* for model

compute_individual_tensorized(*timepoints*, *individual_parameters*, *, *attribute_type*=None)

Compute the individual values at timepoints according to the model.

Parameters

timepoints [`torch.Tensor` of shape (n_individuals, n_timepoints)]

individual_parameters [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

`torch.Tensor` of shape (n_individuals, n_timepoints, n_features)

compute_individual_tensorized_linear(*timepoints*, *individual_parameters*, *, *attribute_type*=None)

Compute the individual values at timepoints according to the model (linear).

Parameters

timepoints [`torch.Tensor` of shape (n_individuals, n_timepoints)]

individual_parameters [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

`torch.Tensor` of shape (n_individuals, n_timepoints, n_features)

compute_individual_tensorized_logistic(*timepoints*, *individual_parameters*, *, *attribute_type*=None)

Compute the individual values at timepoints according to the model (logistic).

Parameters

timepoints [`torch.Tensor` of shape (n_individuals, n_timepoints)]

individual_parameters [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

`torch.Tensor` of shape (n_individuals, n_timepoints, n_features)

compute_individual_trajectory(*timepoints*, *individual_parameters*: `Dict[str, Any]`, *, *skip_ips_checks*: `bool` = False)

Compute scores values at the given time-point(s) given a subject's individual parameters.

Parameters

timepoints [scalar or array_like[scalar] (list, tuple, `numpy.ndarray`)] Contains the age(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a scalar or array_like

skip_ips_checks [bool (default: False)] Flag to skip consistency/compatibility checks and tensorization of individual_parameters when it was done earlier (speed-up)

Returns

`torch.Tensor` Contains the subject's scores computed at the given age(s) Shape of tensor is (1, n_tpts, n_features)

Raises

`LeaspyModelError` if computation is tried on more than 1 individual

`LeaspyIndividualParamsInputError` if invalid individual parameters

`compute_jacobian_tensorized(timepoints, individual_parameters, *, attribute_type=None)`

Compute the jacobian of the model w.r.t. each individual parameter.

This function aims to be used in `ScipyMinimize` to speed up optimization.

TODO: as most of numerical operations are repeated when computing model & jacobian, we should create a single method that is able to compute model & jacobian “together” (= efficiently) when requested with a flag for instance.

Parameters

`timepoints` [`torch.Tensor` of shape (n_individuals, n_timepoints)]

`individual_parameters` [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]

`attribute_type` [Any (default None)] Flag to ask for MCMC attributes instead of model’s attributes.

Returns

dict[param_name: str, [class:`torch.Tensor` of shape (n_individuals, n_timepoints, n_features, n_dims_param)]]

`compute_jacobian_tensorized_linear(timepoints, individual_parameters, *, attribute_type=None)`

Compute the jacobian of the model (linear) w.r.t. each individual parameter.

This function aims to be used in `ScipyMinimize` to speed up optimization.

TODO: as most of numerical operations are repeated when computing model & jacobian, we should create a single method that is able to compute model & jacobian “together” (= efficiently) when requested with a flag for instance.

Parameters

`timepoints` [`torch.Tensor` of shape (n_individuals, n_timepoints)]

`individual_parameters` [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]

`attribute_type` [Any (default None)] Flag to ask for MCMC attributes instead of model’s attributes.

Returns

dict[param_name: str, [class:`torch.Tensor` of shape (n_individuals, n_timepoints, n_features, n_dims_param)]]

`compute_jacobian_tensorized_logistic(timepoints, individual_parameters, *, attribute_type=None)`

Compute the jacobian of the model (logistic) w.r.t. each individual parameter.

This function aims to be used in `ScipyMinimize` to speed up optimization.

TODO: as most of numerical operations are repeated when computing model & jacobian, we should create a single method that is able to compute model & jacobian “together” (= efficiently) when requested with a flag for instance.

Parameters

timepoints [`torch.Tensor` of shape (n_individuals, n_timepoints)]
individual_parameters [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]
attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model’s attributes.

Returns

dict[param_name: str, [class:`torch.Tensor` of shape (n_individuals, n_timepoints, n_features, n_dims_param)]]

`compute_mean_traj`(*timepoints*, *, *attribute_type*: *Optional[str]* = *None*)

Compute trajectory of the model with individual parameters being the group-average ones.

TODO check dimensions of io?

Parameters

timepoints [`torch.Tensor` [1, n_timepoints]]
attribute_type ['MCMC' or None]

Returns

`torch.Tensor` [1, n_timepoints, dimension] The group-average values at given time-points

`compute_regularity_realization`(*realization*: `Realization`)

Compute regularity term for a `Realization` instance.

Parameters

realization [`Realization`]

Returns

`torch.Tensor` of the same shape as *realization.tensor_realizations*

`compute_regularity_variable`(*value*: `torch.FloatTensor`, *mean*: `torch.FloatTensor`, *std*: `torch.FloatTensor`) → `torch.FloatTensor`

Compute regularity term (Gaussian distribution), low-level.

TODO: should be encapsulated in a RandomVariableSpecification class together with other specs of RV.

Parameters

value, mean, std [`torch.Tensor` of same shapes]

Returns

`torch.Tensor` of same shape than input

`compute_sufficient_statistics`(*data*, *realizations*)

Compute sufficient statistics from realizations

Parameters

data [`Dataset`]

realizations [*CollectionRealization*]

Returns

dict[suff_stat: str, [class:*torch.Tensor*]]

compute_sum_squared_per_ft_tensorized(*dataset*: *Dataset*, *param_ind*: *DictParamsTorch*, *,
attribute_type=None) → *torch.FloatTensor*

Compute the square of the residuals per subject per feature

Parameters

dataset [*Dataset*] Contains the data of the subjects, in particular the subjects' time-points and the mask (?)

param_ind [dict] Contain the individual parameters

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

***torch.Tensor* of shape (n_individuals,dimension)** Contains L2 residual for each subject and each feature

compute_sum_squared_tensorized(*dataset*: *Dataset*, *param_ind*: *DictParamsTorch*, *,
attribute_type=None) → *torch.FloatTensor*

Compute the square of the residuals per subject

Parameters

dataset [*Dataset*] Contains the data of the subjects, in particular the subjects' time-points and the mask (?)

param_ind [dict] Contain the individual parameters

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

***torch.Tensor* of shape (n_individuals,)** Contains L2 residual for each subject

get_individual_realization_names() → *List[str]*

Get names of individual variables of the model.

Returns

list[str]

get_param_from_real(*realizations*: *CollectionRealization*) → *Dict[str, torch.FloatTensor]*

Get individual parameters realizations from all model realizations

<!> The tensors are not cloned and so a link continue to exist between the individual parameters and the underlying tensors of realizations.

Parameters

realizations [*CollectionRealization*]

Returns

dict[param_name: str, [class:*torch.Tensor* [n_individuals, dims_param]]] Individual parameters

get_population_realization_names() → `List[str]`

Get names of population variables of the model.

Returns

`list[str]`

initialize(dataset, method: str = 'default')

Initialize the model given a dataset and an initialization method.

After calling this method `is_initialized` should be True and model should be ready for use.

Parameters

dataset [`Dataset`] The dataset we want to initialize from.

method [str] A custom method to initialize the model

initialize_MCMC_toolbox()

Initialize Monte-Carlo Markov-Chain toolbox for calibration of model

initialize_realizations_for_model(n_individuals: int, **init_kws) → `CollectionRealization`

Initialize a `CollectionRealization` used during model fitting or mode/mean realization personalization.

Parameters

n_individuals [int] Number of individuals to track

****init_kws** Keyword arguments passed to `CollectionRealization.initialize()`.

(In particular `individual_variable_init_at_mean` to “initialize at mean” or `skip_variable` to filter some variables)

Returns

`CollectionRealization`

load_hyperparameters(hyperparameters: Dict[str, Any])

Load model’s hyperparameters

Parameters

hyperparameters [dict[str, Any]] Contains the model’s hyperparameters

Raises

`LeaspyModelError` If any of the consistency checks fail.

load_parameters(parameters)

Instantiate or update the model’s parameters.

Parameters

parameters [dict[str, Any]] Contains the model’s parameters

move_to_device(device: torch.device) → None

Move a model and its relevant attributes to the specified device.

Parameters

device [torch.device]

random_variable_informations()

Information on model’s random variables.

Returns

`dict[str, Any]`

- **name: str** Name of the random variable
- **type: ‘population’ or ‘individual’** Individual or population random variable?
- **shape: tuple[int, ...]** Shape of the variable (only 1D for individual and 1D or 2D for pop. are supported)
- **rv_type: str** An indication (not used in code) on the probability distribution used for the var (only Gaussian is supported)
- **scale: optional float** The fixed scale to use for initial std-dev in the corresponding sampler. When not defined, sampler will rely on scales estimated at model initialization. cf. `GibbsSampler`

save(*path: str*, *with_mixing_matrix: bool* = True, ***kwargs*)

Save Leaspy object as json model parameter file.

Parameters

path [str] Path to store the model’s parameters.

with_mixing_matrix [bool (default True)] Save the mixing matrix in the exported file in its ‘parameters’ section. <!> It is not a real parameter and its value will be overwritten at model loading (orthonormal basis is recomputed from other “true” parameters and mixing matrix is then deduced from this orthonormal basis and the betas)! It was integrated historically because it is used for convenience in browser webtool and only there...

****kwargs** Keyword arguments for json.dump method. Default to: dict(indent=2)

smart_initialization_realizations(*dataset: Dataset*, *realizations: CollectionRealization*) → *CollectionRealization*

Smart initialization of realizations if needed (input may be modified in-place).

Default behavior to return *realizations* as they are (no smart trick).

Parameters

dataset [*Dataset*]

realizations [*CollectionRealization*]

Returns

CollectionRealization

static time_reparametrization(*timepoints: torch.FloatTensor*, *xi: torch.FloatTensor*, *tau: torch.FloatTensor*) → *torch.FloatTensor*

Tensorized time reparametrization formula

<!> Shapes of tensors must be compatible between them.

Parameters

timepoints [*torch.Tensor*] Timepoints to reparametrize

xi [*torch.Tensor*] Log-acceleration of individual(s)

tau [*torch.Tensor*] Time-shift(s)

Returns

torch.Tensor of same shape as *timepoints*

update_MCMC_toolbox(*name_of_the_variables_that_have_been_changed*, *realizations*)

Update the MCMC toolbox with a collection of realizations of model population parameters.

Parameters

name_of_the_variables_that_have_been_changed [container[str] (list, tuple, ...)]
Names of the population parameters to update in MCMC toolbox

realizations [*CollectionRealization*] All the realizations to update MCMC toolbox
with

update_model_parameters_burn_in(*data, realizations*)

Update model parameters (burn-in phase)

Parameters

data [*Dataset*]

realizations [*CollectionRealization*]

update_model_parameters_normal(*data, suff_stats*)

Update model parameters (after burn-in phase)

Parameters

data [*Dataset*]

suff_stats [dict[suff_stat: str, *torch.Tensor*]]

3.2.6 leaspy.models.multivariate_parallel_model.MultivariateParallelModel

class MultivariateParallelModel(name: str, **kwargs)

Bases: *leaspy.models.abstract_multivariate_model.AbstractMultivariateModel*

Logistic model for multiple variables of interest, imposing same average evolution pace for all variables (logistic curves are only time-shifted).

Parameters

name [str] Name of the model

****kwargs** Hyperparameters of the model

Methods

compute_individual_ages_from_biomarker_val For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters).

compute_individual_ages_from_biomarker_val For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs

compute_individual_attachment_tensorized(...) Compute attachment term (per subject)

compute_individual_tensorized(timepoints, ...) Compute the individual values at timepoints according to the model.

compute_individual_trajectory(timepoints, ...) Compute scores values at the given time-point(s) given a subject's individual parameters.

compute_jacobian_tensorized(timepoints, ...) Compute the jacobian of the model w.r.t.

compute_mean_traj(timepoints, *[...,]) Compute trajectory of the model with individual parameters being the group-average ones.

continues on next page

Table 10 – continued from previous page

<code>compute_regularity_realization(realization)</code>	Compute regularity term for a <code>Realization</code> instance.
<code>compute_regularity_variable(value, mean, std)</code>	Compute regularity term (Gaussian distribution), low-level.
<code>compute_sufficient_statistics(data, realizations)</code>	Compute sufficient statistics from realizations
<code>compute_sum_squared_per_ft_tensorized(...[, ...])</code>	Compute the square of the residuals per subject per feature
<code>compute_sum_squared_tensorized(dataset, ...)</code>	Compute the square of the residuals per subject
<code>get_individual_realization_names()</code>	Get names of individual variables of the model.
<code>get_param_from_real(realizations)</code>	Get individual parameters realizations from all model realizations
<code>get_population_realization_names()</code>	Get names of population variables of the model.
<code>initialize(dataset[, method])</code>	Initialize the model given a dataset and an initialization method.
<code>initialize_MCMC_toolbox()</code>	Initialize Monte-Carlo Markov-Chain toolbox for calibration of model
<code>initialize_realizations_for_model(...)</code>	Initialize a <code>CollectionRealization</code> used during model fitting or mode/mean realization personalization.
<code>load_hyperparameters(hyperparameters)</code>	Load model's hyperparameters
<code>load_parameters(parameters)</code>	Instantiate or update the model's parameters.
<code>move_to_device(device)</code>	Move a model and its relevant attributes to the specified device.
<code>random_variable_informations()</code>	Information on model's random variables.
<code>save(path[, with_mixing_matrix])</code>	Save Leaspy object as json model parameter file.
<code>smart_INITIALIZATION_realizations(dataset, ...)</code>	Smart initialization of realizations if needed (input may be modified in-place).
<code>time_reparametrization(timepoints, xi, tau)</code>	Tensorized time reparametrization formula
<code>update_MCMC_toolbox(...)</code>	Update the MCMC toolbox with a collection of realizations of model population parameters.
<code>update_model_parameters_burn_in(data, ...)</code>	Update model parameters (burn-in phase)
<code>update_model_parameters_normal(data, suff_stats)</code>	Update model parameters (after burn-in phase)

`compute_individual_ages_from_biomarker_values(value: Union[float, List[float]], individual_parameters: Dict[str, Any], feature: Optional[str] = None)`

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters).

Consistency checks are done in the main API layer.

Parameters

value [scalar or array_like[scalar] (list, tuple, `numpy.ndarray`)] Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a scalar or array_like

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

torch.Tensor Contains the subject's ages computed at the given values(s) Shape of tensor is (1, n_values)

Raises

LeaspyModelError if computation is tried on more than 1 individual

compute_individual_ages_from_biomarker_values_tensorized(*value*, *individual_parameters*, *feature*)

For one individual, compute age(s) at which the given features values are reached (given the subject's individual parameters), with tensorized inputs

Parameters

value [torch.Tensor of shape (1, n_values)] Contains the biomarker value(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a torch.Tensor

feature [str (or None)] Name of the considered biomarker (optional for univariate models, compulsory for multivariate models).

Returns

torch.Tensor Contains the subject's ages computed at the given values(s) Shape of tensor is (n_values, 1)

compute_individual_attachment_tensorized(*data*: Dataset, *param_ind*: DictParamsTorch, *, *attribute_type*) → torch.FloatTensor

Compute attachment term (per subject)

Parameters

data [Dataset] Contains the data of the subjects, in particular the subjects' time-points and the mask for nan values & padded visits

param_ind [dict] Contain the individual parameters

attribute_type [Any] Flag to ask for MCMC attributes instead of model's attributes.

Returns

attachment [torch.Tensor] Negative Log-likelihood, shape = (n_subjects,)

Raises

LeaspyModelError If invalid *noise_model* for model

compute_individual_tensorized(*timepoints*, *individual_parameters*, *, *attribute_type=None*)

Compute the individual values at timepoints according to the model.

Parameters

timepoints [torch.Tensor of shape (n_individuals, n_timepoints)]

individual_parameters [dict[param_name: str, torch.Tensor of shape (n_individuals, n_dims_param)]]

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals, n_timepoints, n_features)

compute_individual_trajectory(*timepoints*, *individual_parameters*: *Dict[str, Any]*, *, *skip_ips_checks*: *bool* = False)

Compute scores values at the given time-point(s) given a subject's individual parameters.

Parameters

timepoints [scalar or array_like[scalar] (list, tuple, `numpy.ndarray`)] Contains the age(s) of the subject.

individual_parameters [dict] Contains the individual parameters. Each individual parameter should be a scalar or array_like

skip_ips_checks [bool (default: False)] Flag to skip consistency/compatibility checks and tensorization of individual_parameters when it was done earlier (speed-up)

Returns

`torch.Tensor` Contains the subject's scores computed at the given age(s) Shape of tensor is (1, n_tpts, n_features)

Raises

`LeaspyModelError` if computation is tried on more than 1 individual

`LeaspyIndividualParamsInputError` if invalid individual parameters

compute_jacobian_tensorized(*timepoints*, *individual_parameters*, *, *attribute_type*=None)

Compute the jacobian of the model w.r.t. each individual parameter.

This function aims to be used in `ScipyMinimize` to speed up optimization.

TODO: as most of numerical operations are repeated when computing model & jacobian, we should create a single method that is able to compute model & jacobian “together” (= efficiently) when requested with a flag for instance.

Parameters

timepoints [`torch.Tensor` of shape (n_individuals, n_timepoints)]

individual_parameters [dict[param_name: str, `torch.Tensor` of shape (n_individuals, n_dims_param)]]

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

`dict[param_name: str, [class:torch.Tensor of shape (n_individuals, n_timepoints, n_features, n_dims_param)]]`

compute_mean_traj(*timepoints*, *, *attribute_type*: *Optional[str]* = None)

Compute trajectory of the model with individual parameters being the group-average ones.

TODO check dimensions of io?

Parameters

timepoints [`torch.Tensor` [1, n_timepoints]]

attribute_type ['MCMC' or None]

Returns

`torch.Tensor [1, n_timepoints, dimension]` The group-average values at given time-points

compute_regularity_realization(realization: Realization)

Compute regularity term for a *Realization* instance.

Parameters

realization [Realization]

Returns

torch.Tensor of the same shape as *realization.tensor_realizations*

compute_regularity_variable(value: torch.FloatTensor, mean: torch.FloatTensor, std: torch.FloatTensor) → torch.FloatTensor

Compute regularity term (Gaussian distribution), low-level.

TODO: should be encapsulated in a RandomVariableSpecification class together with other specs of RV.

Parameters

value, mean, std [torch.Tensor of same shapes]

Returns

torch.Tensor of same shape than input

compute_sufficient_statistics(data, realizations)

Compute sufficient statistics from realizations

Parameters

data [Dataset]

realizations [CollectionRealization]

Returns

dict[suff_stat: str, [class:torch.Tensor]]

compute_sum_squared_per_ft_tensorized(dataset: Dataset, param_ind: DictParamsTorch, *, attribute_type=None) → torch.FloatTensor

Compute the square of the residuals per subject per feature

Parameters

dataset [Dataset] Contains the data of the subjects, in particular the subjects' time-points and the mask (?)

param_ind [dict] Contain the individual parameters

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals,dimension) Contains L2 residual for each subject and each feature

compute_sum_squared_tensorized(dataset: Dataset, param_ind: DictParamsTorch, *, attribute_type=None) → torch.FloatTensor

Compute the square of the residuals per subject

Parameters

dataset [Dataset] Contains the data of the subjects, in particular the subjects' time-points and the mask (?)

param_ind [dict] Contain the individual parameters

attribute_type [Any (default None)] Flag to ask for MCMC attributes instead of model's attributes.

Returns

torch.Tensor of shape (n_individuals,) Contains L2 residual for each subject

get_individual_realization_names() → **List[str]**

Get names of individual variables of the model.

Returns

list[str]

get_param_from_real(realizations: CollectionRealization) → **Dict[str, torch.FloatTensor]**

Get individual parameters realizations from all model realizations

<!> **The tensors are not cloned and so a link continue to exist between the individual parameters and the underlying tensors of realizations.**

Parameters

realizations [*CollectionRealization*]

Returns

dict[param_name: str, [class:torch.Tensor [n_individuals, dims_param]]] Individual parameters

get_population_realization_names() → **List[str]**

Get names of population variables of the model.

Returns

list[str]

initialize(dataset, method: str = 'default')

Initialize the model given a dataset and an initialization method.

After calling this method **is_initialized** should be True and model should be ready for use.

Parameters

dataset [*Dataset*] The dataset we want to initialize from.

method [str] A custom method to initialize the model

initialize_MCMC_toolbox()

Initialize Monte-Carlo Markov-Chain toolbox for calibration of model

initialize_realizations_for_model(n_individuals: int, **init_kws) → *CollectionRealization*

Initialize a *CollectionRealization* used during model fitting or mode/mean realization personalization.

Parameters

n_individuals [int] Number of individuals to track

****init_kws** Keyword arguments passed to *CollectionRealization.initialize()*.
(In particular *individual_variable_init_at_mean* to “initialize at mean” or *skip_variable* to filter some variables)

Returns

CollectionRealization

load_hyperparameters(*hyperparameters*: *Dict[str, Any]*)

Load model's hyperparameters

Parameters

hyperparameters [dict[str, Any]] Contains the model's hyperparameters

Raises

LeaspyModelError If any of the consistency checks fail.

load_parameters(*parameters*)

Instantiate or update the model's parameters.

Parameters

parameters [dict[str, Any]] Contains the model's parameters

move_to_device(*device*: *torch.device*) → *None*

Move a model and its relevant attributes to the specified device.

Parameters

device [torch.device]

random_variable_informations()

Information on model's random variables.

Returns

dict[str, Any]

- **name: str** Name of the random variable
- **type: ‘population’ or ‘individual’** Individual or population random variable?
- **shape: tuple[int, ...]** Shape of the variable (only 1D for individual and 1D or 2D for pop. are supported)
- **rv_type: str** An indication (not used in code) on the probability distribution used for the var (only Gaussian is supported)
- **scale: optional float** The fixed scale to use for initial std-dev in the corresponding sampler. When not defined, sampler will rely on scales estimated at model initialization. cf. `GibbsSampler`

save(*path*: *str*, *with_mixing_matrix*: *bool* = *True*, ***kwargs*)

Save Leaspy object as json model parameter file.

Parameters

path [str] Path to store the model's parameters.

with_mixing_matrix [bool (default True)] Save the mixing matrix in the exported file in its ‘parameters’ section. <!> It is not a real parameter and its value will be overwritten at model loading (orthonormal basis is recomputed from other “true” parameters and mixing matrix is then deduced from this orthonormal basis and the betas)! It was integrated historically because it is used for convenience in browser webtool and only there...

****kwargs** Keyword arguments for json.dump method. Default to: dict(indent=2)

smart_INITIALIZATION_realizations(*dataset*: *Dataset*, *realizations*: *CollectionRealization*) → *CollectionRealization*

Smart initialization of realizations if needed (input may be modified in-place).

Default behavior to return *realizations* as they are (no smart trick).

Parameters

dataset [[Dataset](#)]
realizations [[CollectionRealization](#)]

Returns

[CollectionRealization](#)

static time_reparametrization(*timepoints*: [torch.FloatTensor](#), *xi*: [torch.FloatTensor](#), *tau*: [torch.FloatTensor](#)) → [torch.FloatTensor](#)

Tensorized time reparametrization formula

<!> Shapes of tensors must be compatible between them.

Parameters

timepoints [[torch.Tensor](#)] Timepoints to reparametrize
xi [[torch.Tensor](#)] Log-acceleration of individual(s)
tau [[torch.Tensor](#)] Time-shift(s)

Returns

[torch.Tensor](#) of same shape as *timepoints*

update_MCMC_toolbox(*name_of_the_variables_that_have_been_changed*, *realizations*)

Update the MCMC toolbox with a collection of realizations of model population parameters.

Parameters

name_of_the_variables_that_have_been_changed [container[str] (list, tuple, ...)]
Names of the population parameters to update in MCMC toolbox
realizations [[CollectionRealization](#)] All the realizations to update MCMC toolbox
with

update_model_parameters_burn_in(*data*, *realizations*)

Update model parameters (burn-in phase)

Parameters

data [[Dataset](#)]
realizations [[CollectionRealization](#)]

update_model_parameters_normal(*data*, *suff_stats*)

Update model parameters (after burn-in phase)

Parameters

data [[Dataset](#)]
suff_stats [dict[suff_stat: str, [torch.Tensor](#)]]

3.2.7 leaspy.models.lme_model.LMEModel

`class LMEModel(name: str, **kwargs)`

Bases: `leaspy.models.generic_model.GenericModel`

`LMEModel` is a benchmark model that fits and personalize a linear mixed-effects model

The model specification is the following:

$$y_{ij} = \text{fixed}_{\text{intercept}} + \text{random}_{\text{intercept}_i} + (\text{fixed}_{\text{slopeAge}} + \text{random}_{\text{slopeAge}_i}) * \text{age}_{ij} + \epsilon_{ij}$$

with:

- y_{ij} : value of the feature of the i-th subject at his j-th visit,
- age_{ij} : age of the i-th subject at his j-th visit.
- ϵ_{ij} : residual Gaussian noise (independent between visits)

<!> This model must be fitted on one feature only (univariate model).

TODO? add some covariates in this very simple model.

Parameters

`name` [str] The model's name

`**kwargs`

Model hyperparameters:

- `with_random_slope_age` : bool (default True)

See also:

[`LMEFitAlgorithm`](#)

[`LMEPersonalizeAlgorithm`](#)

Attributes

`name` [str] The model's name

`is_initialized` [bool] Is the model initialized?

`with_random_slope_age` [bool (default True)] Has the LME a random slope for subject's age? Otherwise it only has a random intercept per subject

`features` [list[str]] List of the model features <!> LME has only one feature.

`dimension` [int] Will always be 1 (univariate)

`parameters` [dict]

Contains the model parameters. In particular:

- `ages_mean` [float] Mean of ages (for normalization)
- `ages_std` [float] Std-dev of ages (for normalization)
- `fe_params` [np.ndarray[float]] Fixed effects
- `cov_re` [np.ndarray[float, float]] Variance-covariance matrix of random-effects
- `cov_re_unscaled_inv` [np.ndarray[float, float]] Inverse of unscaled (= divided by variance of noise) variance-covariance matrix of random-effects. This matrix is used for personalization to new subjects.

- **noise_std** [float] Std-dev of Gaussian noise
- **bse_fe, bse_re** [np.ndarray[float]] Standard errors on fixed-effects and random-effects respectively (not used in Leaspy).

Methods

<code>compute_individual_trajectory</code> (timepoints, ...)	Compute scores values at the given time-point(s) given a subject's individual parameters.
<code>get_hyperparameters</code> (*[, with_features, ...])	Get all model hyperparameters
<code>hyperparameters_ok()</code>	Check all model hyperparameters are ok
<code>initialize</code> (dataset[, method])	Initialize the model given a dataset and an initialization method.
<code>load_hyperparameters</code> (hyperparameters, *[, ...])	Load model hyperparameters from a dict
<code>load_parameters</code> (parameters, *[, list_converter])	Instantiate or update the model's parameters.
<code>save</code> (path, **kwargs)	Save Leaspy object as json model parameter file.
<code>validate_compatibility_of_dataset</code> (dataset)	Raise if the given dataset is not compatible with the current model.

compute_individual_trajectory(timepoints, individual_parameters: *dict*)

Compute scores values at the given time-point(s) given a subject's individual parameters.

Parameters

timepoints [array-like of ages (not normalized)] Timepoints to compute individual trajectory at

individual_parameters [*dict*]

Individual parameters:

- random_intercept
- random_slope_age (if `with_random_slope_age == True`)

Returns

`torch.Tensor` of float of shape (`n_individuals == 1, n_tpts == len(timepoints), n_features == 1`)

get_hyperparameters(*[, with_features=True, with_properties=True, default=None) → Dict[str, Any]

Get all model hyperparameters

Parameters

with_features, with_properties [bool (default True)] Whether to include *features* and respectively all *_properties* (i.e. *_dynamic_* hyperparameters) in the returned dictionary

default [Any] Default value is something is an hyperparameter is missing (should not!)

Returns

`dict { hyperparam_name : str -> hyperparam_value }[Any]`

hyperparameters_ok() → `bool`

Check all model hyperparameters are ok

Returns

`bool`

initialize(dataset: Dataset, method: str = None)

Initialize the model given a dataset and an initialization method.

After calling this method `is_initialized` should be True and model should be ready for use.

Parameters

dataset [Dataset] The dataset we want to initialize from.

method [str, optional (default None)] A custom method to initialize the model

load_hyperparameters(hyperparameters: Dict[str, Any], *, with_defaults: bool = False) → None

Load model hyperparameters from a dict

Parameters

hyperparameters [dict[str, Any]] Contains the model's hyperparameters

with_defaults [bool (default False)] If true, it also resets hyperparameters that are part of the model but not included in `hyperparameters` to their default value.

Raises

`LeaspyModelError` if inconsistent hyperparameters

load_parameters(parameters, *, list_converter=<built-in function array>) → None

Instantiate or update the model's parameters.

Parameters

parameters [dict] Contains the model's parameters.

list_converter [callable] The function to convert list objects.

save(path: str, **kwargs)

Save Leaspy object as json model parameter file.

Default save method: it can be overwritten in child class but should be generic...

Parameters

path [str] Path to store the model's parameters.

****kwargs** Keyword arguments for json.dump method.

validate_compatibility_of_dataset(dataset: Dataset)

Raise if the given dataset is not compatible with the current model.

Parameters

dataset [Dataset] The dataset we want to model.

Raises

`LeaspyDataInputError` [] if data is not univariate.

3.2.8 `leaspy.models.constant_model.ConstantModel`

```
class ConstantModel(name: str, **kwargs)
    Bases: leaspy.models.generic_model.GenericModel
```

ConstantModel is a benchmark model that predicts constant values (no matter what the patient's ages are).

These constant values depend on the algorithm setting and the patient's values provided during calibration. It could predict:

- *last*: last value seen during calibration (even if NaN),
- *last_known*: last non NaN value seen during calibration*§,
- *max*: maximum (=worst) value seen during calibration*§,
- *mean*: average of values seen during calibration§.

* <!> depending on features, the *last_known / max* value may correspond to different visits.

§ <!> for a given feature, value will be NaN if and only if all values for this feature were NaN.

Parameters

name [str] The model's name

****kwargs** Hyperparameters for the model. None supported for now.

See also:

[ConstantPredictionAlgorithm](#)

Attributes

name [str] The model's name

is_initialized [bool] Always True (no true initialization needed for constant model)

features [list[str]] List of the model features. Unlike most models features will be determined at *personalization* only (because it does not need any *fit*)

dimension [int] Number of features (read-only)

parameters [dict] Model has no parameters: empty dictionary. The *prediction_type* parameter should be defined during *personalization*. Example:

```
>>> AlgorithmSettings('constant_prediction', prediction_type='last_
    ↵known')
```

Methods

<code>compute_individual_trajectory(timepoints, ...)</code>	Compute scores values at the given time-point(s) given a subject's individual parameters.
<code>get_hyperparameters(*[, with_features, ...])</code>	Get all model hyperparameters
<code>hyperparameters_ok()</code>	Check all model hyperparameters are ok
<code>initialize(dataset[, method])</code>	Initialize the model given a dataset and an initialization method.
<code>load_hyperparameters(hyperparameters, *[...])</code>	Load model hyperparameters from a dict
<code>load_parameters(parameters, *[, list_converter])</code>	Instantiate or update the model's parameters.
<code>save(path, **kwargs)</code>	Save Leaspy object as json model parameter file.
<code>validate_compatibility_of_dataset(dataset)</code>	Raise if the given dataset is not compatible with the current model.

`compute_individual_trajectory(timepoints, individual_parameters)`

Compute scores values at the given time-point(s) given a subject's individual parameters.

Parameters

timepoints [scalar or array_like[scalar] (list, tuple, `numpy.ndarray`)] Contains the age(s) of the subject.

individual_parameters [dict[str, Any]] Contains the individual parameters. Each individual parameter should be a scalar or array_like

Returns

torch.Tensor Contains the subject's scores computed at the given age(s) Shape of tensor is (1, n_tpts, n_features)

`get_hyperparameters(*, with_features=True, with_properties=True, default=None) → Dict[str, Any]`

Get all model hyperparameters

Parameters

with_features, with_properties [bool (default True)] Whether to include *features* and respectively all *_properties* (i.e. *_dynamic_* hyperparameters) in the returned dictionary

default [Any] Default value is something is an hyperparameter is missing (should not!)

Returns

dict { hyperparam_name } [str -> hyperparam_value][Any]

`hyperparameters_ok() → bool`

Check all model hyperparameters are ok

Returns

bool

`initialize(dataset: Dataset, method: str = None)`

Initialize the model given a dataset and an initialization method.

After calling this method `is_initialized` should be True and model should be ready for use.

Parameters

dataset [`Dataset`] The dataset we want to initialize from.

method [str, optional (default None)] A custom method to initialize the model

load_hyperparameters(*hyperparameters*: *Dict[str, Any]*, *, *with_defaults*: *bool* = *False*) → *None*

Load model hyperparameters from a dict

Parameters

hyperparameters [dict[str, Any]] Contains the model's hyperparameters

with_defaults [bool (default False)] If true, it also resets hyperparameters that are part of the model but not included in *hyperparameters* to their default value.

Raises

LeaspyModelError if inconsistent hyperparameters

load_parameters(*parameters*, *, *list_converter*=<built-in function array>) → *None*

Instantiate or update the model's parameters.

Parameters

parameters [dict] Contains the model's parameters.

list_converter [callable] The function to convert list objects.

save(*path*: *str*, ***kwargs*)

Save Leaspy object as json model parameter file.

Default save method: it can be overwritten in child class but should be generic...

Parameters

path [str] Path to store the model's parameters.

****kwargs** Keyword arguments for json.dump method.

validate_compatibility_of_dataset(*dataset*: *Dataset*)

Raise if the given dataset is not compatible with the current model.

Parameters

dataset [*Dataset*] The dataset we want to model.

Raises

LeaspyDataModelError If and only if data is incompatible with model.

3.2.9 `leaspy.models.utils.attributes: Models' attributes`

Attributes used by the models.

<code>attributes_factory.AttributesFactory()</code>	Return an <i>Attributes</i> class object based on the given parameters.
<code>abstract_attributes.</code> <code>AbstractAttributes(name)</code>	Abstract base class for attributes of models.
<code>abstract_manifold_model_attributes.</code> <code>AbstractManifoldModelAttributes(...)</code>	Abstract base class for attributes of leaspy manifold models.
<code>linear_attributes.LinearAttributes(name, ...)</code>	Attributes of leaspy linear models.
<code>logistic_attributes.</code> <code>LogisticAttributes(name, ...)</code>	Attributes of leaspy logistic models.
<code>logistic_parallel_attributes.</code> <code>LogisticParallelAttributes(...)</code>	Attributes of leaspy logistic parallel models.

leaspy.models.utils.attributes.attributes_factory.AttributesFactory**class AttributesFactory**Bases: `object`

Return an `Attributes` class object based on the given parameters.

Methods

<code>attributes(name, source_dimension)</code>	dimension[, Class method to build correct model attributes depending on model <i>name</i> .]
---	--

classmethod attributes(name: str, dimension: int, source_dimension: Optional[int] = None) → AbstractAttributes

Class method to build correct model attributes depending on model *name*.

Parameters**name** [str]**dimension** [int]**source_dimension** [int, optional (default None)]**Returns****AbstractAttributes****Raises****LeaspyModelError** if any inconsistent parameter.**leaspy.models.utils.attributes.abstract_attributes.AbstractAttributes****class AbstractAttributes(name: str, dimension: Optional[int] = None, source_dimension: Optional[int] = None)**Bases: `abc.ABC`

Abstract base class for attributes of models.

Contains the common attributes & methods of the different attributes classes. Such classes are used to update the models' attributes.

Parameters**name** [str]**dimension** [int (default None)]**source_dimension** [int (default None)]**Raises****LeaspyModelError** if any inconsistent parameter.**Attributes****name** [str] Name of the associated leaspy model.**dimension** [int] Number of features of the model

source_dimension [int] Number of sources of the model TODO? move to AbstractManifoldModelAttributes?

univariate [bool] Whether model is univariate or not (i.e. dimension == 1)

has_sources [bool] Whether model has sources or not (not univariate and source_dimension >= 1) TODO? move to AbstractManifoldModelAttributes?

update_possibilities [tuple[str]] (default empty)] Contains the available parameters to update. Different models have different parameters.

Methods

<code>get_attributes()</code>	Returns the essential attributes of a given model.
<code>move_to_device(device)</code>	Move the tensor attributes of this class to the specified device.
<code>update(names_of_changed_values, values)</code>	Update model group average parameter(s).

abstract get_attributes() → `Tuple[torch.FloatTensor, ...]`

Returns the essential attributes of a given model.

Returns

Depends on the subclass, please refer to each specific class.

move_to_device(device: torch.device)

Move the tensor attributes of this class to the specified device.

Parameters

device [torch.device]

abstract update(names_of_changed_values: Tuple[str, ...], values: Dict[str, torch.FloatTensor]) → None

Update model group average parameter(s).

Parameters

names_of_changed_values [list [str]] Values to be updated

values [dict [str, torch.Tensor]] New values used to update the model's group average parameters

Raises

LeaspyModelError If `names_of_changed_values` contains unknown values to update.

`leaspy.models.utils.attributes.abstract_manifold_model_attributes.AbstractManifoldModelAttributes`

class AbstractManifoldModelAttributes(name: str, dimension: int, source_dimension: Optional[int] = None)

Bases: `leaspy.models.utils.attributes.abstract_attributes.AbstractAttributes`

Abstract base class for attributes of leaspy manifold models.

Contains the common attributes & methods of the different attributes classes. Such classes are used to update the models' attributes.

Parameters

name [str]
dimension [int]
source_dimension [int (default None)]

Raises

LeaspyModelError if any inconsistent parameter.

Attributes

name [str (default None)] Name of the associated leaspy model.
dimension [int]
source_dimension [int]
univariate [bool] Whether model is univariate or not (i.e. dimension == 1)
has_sources [bool] Whether model has sources or not (not univariate and source_dimension >= 1)
update_possibilities [tuple[str]] Contains the available parameters to update. Different models have different parameters.
positions [`torch.Tensor` [dimension] (default None)] <!> Depending on the model it does not correspond to the same thing.
velocities [`torch.Tensor` [dimension] (default None)] Vector of velocities for each feature (positive components). For multivariate models only (except for parallel model as it is useless).
orthonormal_basis [`torch.Tensor` [dimension, dimension - 1] (default None)] For multivariate and multivariate parallel models, with source_dimension >= 1.
betas [`torch.Tensor` [dimension - 1, source_dimension] (default None)] For multivariate and multivariate parallel models, with source_dimension >= 1.
mixing_matrix [`torch.Tensor` [dimension, source_dimension] (default None)] Matrix A such that w_i = A * s_i. For multivariate and multivariate parallel models, with source_dimension >= 1.

Methods

<code>get_attributes()</code>	Returns the attributes of the model.
<code>move_to_device(device)</code>	Move the tensor attributes of this class to the specified device.
<code>update(names_of_changed_values, values)</code>	Update model group average parameter(s).

get_attributes()

Returns the attributes of the model.

It is either a tuple of torch tensors or a single torch tensor if there is only one attribute for the model (e.g.: univariate models). For the precise definitions of those attributes please refer to the exact attributes class associated to your model.

Returns

For univariate models: positions: `torch.Tensor`

For multivariate (but not parallel) models:

- positions: *torch.Tensor*
- velocities: *torch.Tensor*
- mixing_matrix: *torch.Tensor*

move_to_device(device: torch.device)

Move the tensor attributes of this class to the specified device.

Parameters**device** [torch.device]**abstract update(names_of_changed_values: Tuple[str, ...], values: Dict[str, torch.FloatTensor]) → None**

Update model group average parameter(s).

Parameters**names_of_changed_values** [list [str]] Values to be updated**values** [dict [str, *torch.Tensor*]] New values used to update the model's group average parameters**Raises****LeaspyModelError** If *names_of_changed_values* contains unknown values to update.**leaspy.models.utils.attributes.linear_attributes.LinearAttributes****class LinearAttributes(name, dimension, source_dimension)**

Bases: *leaspy.models.utils.attributes.abstract_manifold_model_attributes.AbstractManifoldModelAttributes*

Attributes of leaspy linear models.

Contains the common attributes & methods to update the linear model's attributes.

Parameters**name** [str]**dimension** [int]**source_dimension** [int]

See also:

[UnivariateModel](#)

[MultivariateModel](#)

Attributes**name** [str (default ‘linear’)] Name of the associated leaspy model.**dimension** [int]**source_dimension** [int]**univariate** [bool] Whether model is univariate or not (i.e. dimension == 1)**has_sources** [bool] Whether model has sources or not (not univariate and source_dimension >= 1)

update_possibilities [tuple [str] (default ('all', 'g', 'v0', 'betas'))] Contains the available parameters to update. Different models have different parameters.

positions [`torch.Tensor` [dimension] (default None)] positions = realizations['g'] such that "p0" = positions

velocities [`torch.Tensor` [dimension] (default None)] Always positive:
exp(realizations['v0'])]

orthonormal_basis [`torch.Tensor` [dimension, dimension - 1] (default None)]

betas [`torch.Tensor` [dimension - 1, source_dimension] (default None)]

mixing_matrix [`torch.Tensor` [dimension, source_dimension] (default None)] Matrix A such that $w_i = A * s_i$.

Methods

<code>get_attributes()</code>	Returns the attributes of the model.
<code>move_to_device(device)</code>	Move the tensor attributes of this class to the specified device.
<code>update(names_of_changed_values, values)</code>	Update model group average parameter(s).

`get_attributes()`

Returns the attributes of the model.

It is either a tuple of torch tensors or a single torch tensor if there is only one attribute for the model (e.g.: univariate models). For the precise definitions of those attributes please refer to the exact attributes class associated to your model.

Returns

For univariate models: positions: `torch.Tensor`

For multivariate (but not parallel) models:

- positions: `torch.Tensor`
- velocities: `torch.Tensor`
- mixing_matrix: `torch.Tensor`

`move_to_device(device: torch.device)`

Move the tensor attributes of this class to the specified device.

Parameters

`device` [`torch.device`]

`update(names_of_changed_values, values)`

Update model group average parameter(s).

Parameters

`names_of_changed_values` [list [str]]

Elements of list must be either:

- all (update everything)
- g correspond to the attribute positions.

- $v\theta$ (only for multivariate models) correspond to the attribute `velocities`. When we are sure that the v_0 change is only a scalar multiplication (in particular, when we reparametrize $\log(v_0) <- \log(v_0) + \text{mean}(x_i)$), we may update velocities using `v0_collinear`, otherwise we always assume v_0 is NOT collinear to previous value (no need to perform the verification it is - would not be really efficient)
- `betas` correspond to the linear combination of columns from the orthonormal basis so to derive the `mixing_matrix`.

values [dict [str, `torch.Tensor`]] New values used to update the model's group average parameters

Raises

`LeaspyModelError` If `names_of_changed_values` contains unknown parameters.

`leaspy.models.utils.attributes.logistic_attributes.LogisticAttributes`

class LogisticAttributes(*name, dimension, source_dimension*)
Bases: `leaspy.models.utils.attributes.abstract_manifold_model_attributes.AbstractManifoldModelAttributes`

Attributes of leaspy logistic models.

Contains the common attributes & methods to update the logistic model's attributes.

Parameters

name [str]
dimension [int]
source_dimension [int]

See also:

`UnivariateModel`

`MultivariateModel`

Attributes

name [str (default ‘logistic’)] Name of the associated leaspy model.
dimension [int]
source_dimension [int]
univariate [bool] Whether model is univariate or not (i.e. `dimension == 1`)
has_sources [bool] Whether model has sources or not (not univariate and `source_dimension >= 1`)
update_possibilities [tuple [str] (default (‘all’, ‘g’, ‘v0’, ‘betas’))] Contains the available parameters to update. Different models have different parameters.
positions [`torch.Tensor` [dimension] (default None)] $\text{positions} = \exp(\text{realizations}[‘g’])$ such that “ $p_0 = 1 / (1 + \text{positions})$ ”
velocities [`torch.Tensor` [dimension] (default None)] Always positive: $\exp(\text{realizations}[‘v0’])$
orthonormal_basis [`torch.Tensor` [dimension, dimension - 1] (default None)]

betas [torch.Tensor [dimension - 1, source_dimension] (default None)]
mixing_matrix [torch.Tensor [dimension, source_dimension] (default None)] Matrix A
such that $w_i = A * s_i$.

Methods

<code>get_attributes()</code>	Returns the attributes of the model.
<code>move_to_device(device)</code>	Move the tensor attributes of this class to the specified device.
<code>update(names_of_changed_values, values)</code>	Update model group average parameter(s).

`get_attributes()`

Returns the attributes of the model.

It is either a tuple of torch tensors or a single torch tensor if there is only one attribute for the model (e.g.: univariate models). For the precise definitions of those attributes please refer to the exact attributes class associated to your model.

Returns

For univariate models: positions: *torch.Tensor*

For multivariate (but not parallel) models:

- positions: *torch.Tensor*
- velocities: *torch.Tensor*
- mixing_matrix: *torch.Tensor*

`move_to_device(device: torch.device)`

Move the tensor attributes of this class to the specified device.

Parameters

device [torch.device]

`update(names_of_changed_values, values)`

Update model group average parameter(s).

Parameters

names_of_changed_values [list [str]]

Elements of list must be either:

- all (update everything)
- g correspond to the attribute positions.
- v0 (only for multivariate models) correspond to the attribute velocities. When we are sure that the v0 change is only a scalar multiplication (in particular, when we reparametrize $\log(v0) \leftarrow \log(v0) + \text{mean}(xi)$), we may update velocities using v0_collinear, otherwise we always assume v0 is NOT collinear to previous value (no need to perform the verification it is - would not be really efficient)
- betas correspond to the linear combination of columns from the orthonormal basis so to derive the mixing_matrix.

values [dict [str, *torch.Tensor*]] New values used to update the model's group average parameters

Raises

LeaspyModelError If *names_of_changed_values* contains unknown parameters.

leaspy.models.utils.attributes.logistic_parallel_attributes.LogisticParallelAttributes

```
class LogisticParallelAttributes(name, dimension, source_dimension)
    Bases:             leaspy.models.utils.attributes.abstract_manifold_model_attributes.
                        AbstractManifoldModelAttributes
```

Attributes of leaspy logistic parallel models.

Contains the common attributes & methods of the logistic parallel models' attributes.

Parameters

```
name [str]
dimension [int]
source_dimension [int]
```

Raises

LeaspyModelError if any inconsistent parameters for the model.

See also:

[MultivariateParallelModel](#)

Attributes

```
name [str (default 'logistic_parallel')] Name of the associated leaspy model.
dimension [int]
source_dimension [int]

has_sources [bool] Whether model has sources or not (source_dimension >= 1)

update_possibilities [tuple [str] (default ('all', 'g', 'deltas', 'betas'))] Contains the available
parameters to update. Different models have different parameters.

positions [torch.Tensor (scalar) (default None)] positions = exp(realizations['g']) such that
            "p0" = 1 / (1 + positions * exp(-deltas))

deltas [torch.Tensor [dimension] (default None)] deltas = [0, delta_2_realization, ...,
            delta_n_realization]

orthonormal_basis [torch.Tensor [dimension, dimension - 1] (default None)]
betas [torch.Tensor [dimension - 1, source_dimension] (default None)]

mixing_matrix [torch.Tensor [dimension, source_dimension] (default None)] Matrix A
such that w_i = A * s_i.
```

Methods

<code>get_attributes()</code>	Returns the following attributes: <code>positions</code> , <code>deltas</code> & <code>mixing_matrix</code> .
<code>move_to_device(device)</code>	Move the tensor attributes of this class to the specified device.
<code>update(names_of_changed_values, values)</code>	Update model group average parameter(s).

`get_attributes()`

Returns the following attributes: `positions`, `deltas` & `mixing_matrix`.

Returns

`positions: torch.Tensor`
`deltas: torch.Tensor`
`mixing_matrix: torch.Tensor`

`move_to_device(device: torch.device)`

Move the tensor attributes of this class to the specified device.

Parameters

`device` [torch.device]

`update(names_of_changed_values, values)`

Update model group average parameter(s).

Parameters

`names_of_changed_values` [list [str]]

Elements of list must be either:

- all (update everything)
- g correspond to the attribute `positions`.
- deltas correspond to the attribute `deltas`.
- betas correspond to the linear combination of columns from the orthonormal basis so to derive the `mixing_matrix`.

`values` [dict [str, `torch.Tensor`]] New values used to update the model's group average parameters

Raises

`LeaspyModelError` If `names_of_changed_values` contains unknown parameters.

3.2.10 `leaspy.models.utils.initialization: Initialization methods`

Available methods to initialize model parameters before a fit.

<code>model_initialization.</code> <code>initialize_parameters(...)</code>	Initialize the model's group parameters given its name & the scores of all subjects.
---	--

`leaspy.models.utils.initialization.model_initialization.initialize_parameters`

`initialize_parameters(model, dataset, method='default')`

Initialize the model's group parameters given its name & the scores of all subjects.

Under-the-hood it calls an initialization function dedicated for the *model*:

- `initialize_linear()` (including when *univariate*)
- `initialize_logistic()` (including when *univariate*)
- `initialize_logistic_parallel()`

It is automatically called during `Leaspy.fit()`.

Parameters

`model` [*AbstractModel*] The model to initialize.

`dataset` [*Dataset*] Contains the individual scores.

`method` [str]

Must be one of:

- 'default': initialize at mean.
- 'random': initialize with a gaussian realization with same mean and variance.

Returns

`parameters` [dict [str, `torch.Tensor`]] Contains the initialized model's group parameters.

Raises

`LeaspyInputError` If no initialization method is known for model type / method

3.3 `leaspy.algo`: Algorithms

Contains all algorithms used in the package.

<code>abstract_algo.AbstractAlgo(settings)</code>	Abstract class containing common methods for all algorithm classes.
<code>algo_factory.AlgoFactory()</code>	Return the wanted algorithm given its name.

3.3.1 `leaspy.algo.abstract_algo.AbstractAlgo`

`class AbstractAlgo(settings: AlgorithmSettings)`

Bases: `abc.ABC`

Abstract class containing common methods for all algorithm classes. These classes are child classes of `AbstractAlgo`.

Parameters

`settings` [*AlgorithmSettings*] The specifications of the algorithm as a *AlgorithmSettings* instance.

Attributes

`name` [str] Name of the algorithm.

family [str]**Family of the algorithm. For now, valid families are:**

- 'fit'
- 'personalize'
- 'simulate'

deterministic [bool] True, if and only if algorithm does not involve in randomness. Setting a seed and such algorithms will be useless.**algo_parameters** [dict] Contains the algorithm's parameters. Those are controlled by the `AlgorithmSettings.parameters` class attribute.**seed** [int, optional] Seed used by `numpy` and `torch`.**output_manager** [`FitOutputManager`] Optional output manager of the algorithm

Methods

<code>load_parameters(parameters)</code>	Update the algorithm's parameters by the ones in the given dictionary.
<code>run(model, *args[, return_noise])</code>	Main method, run the algorithm.
<code>run_impl(model, *args, **extra_kwargs)</code>	Run the algorithm (actual implementation), to be implemented in children classes.
<code>set_output_manager(output_settings)</code>	Set a <code>FitOutputManager</code> object for the run of the algorithm

load_parameters(parameters: *dict*)Update the algorithm's parameters by the ones in the given dictionary. The keys in the `io` which does not belong to the algorithm's parameters keys are ignored.

Parameters

parameters [dict] Contains the pairs (key, value) of the wanted parameters

Examples

```
>>> settings = leaspy.io.settings.algorithm_settings.AlgorithmSettings("mcmc_"
->saem")
>>> my_algo = leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM(settings)
>>> my_algo.algo_parameters
{'n_iter': 10000,
 'n_burn_in_iter': 9000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
 'initial_temperature': 10,
 'n_plateau': 10,
 'n_iter': 200}}
>>> parameters = {'n_iter': 5000, 'n_burn_in_iter': 4000}
```

(continues on next page)

(continued from previous page)

```
>>> my_algo.load_parameters(parameters)
>>> my_algo.algo_parameters
{'n_iter': 5000,
 'n_burn_in_iter': 4000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
               'initial_temperature': 10,
               'n_plateau': 10,
               'n_iter': 200}}
```

run(model: AbstractModel, *args, return_noise: bool = False, **extra_kwargs) → Any

Main method, run the algorithm.

TODO fix proper abstract class method: input depends on algorithm... (esp. simulate != from others...)

Parameters**model** [AbstractModel] The used model.**dataset** [Dataset] Contains all the subjects' observations with corresponding timepoints, in torch format to speed up computations.**return_noise** [bool (default False), keyword only] Should the algorithm return main output and optional noise output as a 2-tuple?**Returns****Depends on algorithm class: TODO change?****See also:**[AbstractFitAlgo](#)[AbstractPersonalizeAlgo](#)[SimulationAlgorithm](#)**abstract run_impl**(model: AbstractModel, *args, **extra_kwargs) → Tuple[Any,

Optional[torch.FloatTensor]]

Run the algorithm (actual implementation), to be implemented in children classes.

TODO fix proper abstract class

Parameters**model** [AbstractModel] The used model.**dataset** [Dataset] Contains all the subjects' observations with corresponding timepoints, in torch format to speed up computations.**Returns****A 2-tuple containing:**

- the result to send back to user
- optional float tensor representing noise std-dev (to be printed)

See also:

AbstractFitAlgo
AbstractPersonalizeAlgo
SimulationAlgorithm

set_output_manager(*output_settings*)
Set a FitOutputManager object for the run of the algorithm

Parameters

output_settings [*OutputsSettings*] Contains the logs settings for the computation run
(console print periodicity, plot periodicity ...)

Examples

```
>>> from leaspy import AlgorithmSettings
>>> from leaspy.io.settings.outputs_settings import OutputsSettings
>>> from leaspy.algo.fit.tensor_mcmc_saem import TensorMCMCSAEM
>>> algo_settings = AlgorithmSettings("mcmc_saem")
>>> my_algo = TensorMCMCSAEM(algo_settings)
>>> settings = {'path': 'brouillons',
      'console_print_periodicity': 50,
      'plot_periodicity': 100,
      'save_periodicity': 50
   }
>>> my_algo.set_output_manager(OutputsSettings(settings))
```

3.3.2 leaspy.algo.algo_factory.AlgoFactory

class AlgoFactory

Bases: *object*

Return the wanted algorithm given its name.

Notes

For developers: add your new algorithm in corresponding category of `_algos` dictionary.

Methods

<code>algo(algorithm_family, settings)</code>	Return the wanted algorithm given its name.
<code>get_class(name)</code>	Get the class of the algorithm identified as <i>name</i> .

classmethod algo(*algorithm_family*: str, *settings*) → AbstractAlgo
Return the wanted algorithm given its name.

Parameters

algorithm_family [str] Task name, used to check if the algorithm within the input *settings* is compatible with this task. Must be one of the following api's name:

- *fit*

- *personalize*
- *simulate*

settings [*AlgorithmSettings*] The algorithm settings.

Returns

algorithm [child class of *AbstractAlgo*] The wanted algorithm if it exists and is compatible with algorithm family.

Raises

LeaspyAlgoInputError

- if the algorithm family is unknown
- if the algorithm name is unknown / does not belong to the wanted algorithm family

classmethod get_class(name: str) → Type[*AbstractAlgo*]

Get the class of the algorithm identified as *name*.

3.3.3 leaspy.algo.fit: Fit algorithms

Algorithms used to calibrate (fit) a model.

<i>abstract_fit_algo.AbstractFitAlgo</i> (settings)	Abstract class containing common method for all <i>fit</i> algorithm classes.
<i>abstract_mcmc.AbstractFitMCMC</i> (settings)	Abstract class containing common method for all <i>fit</i> algorithm classes based on <i>Monte-Carlo Markov Chains</i> (MCMC).
<i>tensor_mcmcsaem.TensorMCMCSAEM</i> (settings)	Main algorithm for MCMC-SAEM.

leaspy.algo.fit.abstract_fit_algo.AbstractFitAlgo

class AbstractFitAlgo(settings)
Bases: *leaspy.algo.utils.algo_with_device.AlgoWithDeviceMixin*, *leaspy.algo.abstract_algo.AbstractAlgo*

Abstract class containing common method for all *fit* algorithm classes.

Parameters

settings [*AlgorithmSettings*] The specifications of the algorithm as a *AlgorithmSettings* instance.

See also:

[Leaspy.fit\(\)](#)

Attributes

algorithm_device [str] Valid torch device

current_iteration [int, default 0] The number of the current iteration. The first iteration will be 1 and the last one *n_iter*.

sufficient_statistics [dict[str, *torch.FloatTensor*] or None] The previous step sufficient statistics. It is None during all the burn-in phase.

Inherited attributes From *AbstractAlgo*

Methods

<code>iteration</code> (dataset, model, realizations)	Update the parameters (abstract method).
<code>load_parameters</code> (parameters)	Update the algorithm's parameters by the ones in the given dictionary.
<code>run</code> (model, *args[, return_noise])	Main method, run the algorithm.
<code>run_impl</code> (model, dataset)	Main method, run the algorithm.
<code>set_output_manager</code> (output_settings)	Set a <code>FitOutputManager</code> object for the run of the algorithm

abstract iteration(dataset: *Dataset*, model: *AbstractModel*, realizations: *CollectionRealization*)

Update the parameters (abstract method).

Parameters

dataset [*Dataset*] Contains the subjects' observations in torch format to speed-up computation.

model [*AbstractModel*] The used model.

realizations [*CollectionRealization*] The parameters.

load_parameters(parameters: *dict*)

Update the algorithm's parameters by the ones in the given dictionary. The keys in the io which does not belong to the algorithm's parameters keys are ignored.

Parameters

parameters [*dict*] Contains the pairs (key, value) of the wanted parameters

Examples

```
>>> settings = leaspy.io.settings.algorithm_settings.AlgorithmSettings("mcmc_
->saem")
>>> my_algo = leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM(settings)
>>> my_algo.algo_parameters
{'n_iter': 10000,
 'n_burn_in_iter': 9000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
   'initial_temperature': 10,
   'n_plateau': 10,
   'n_iter': 200}}
>>> parameters = {'n_iter': 5000, 'n_burn_in_iter': 4000}
>>> my_algo.load_parameters(parameters)
>>> my_algo.algo_parameters
{'n_iter': 5000,
 'n_burn_in_iter': 4000,
 'eps': 0.001,
```

(continues on next page)

(continued from previous page)

```
'L': 10,
'sampler_ind': 'Gibbs',
'sampler_pop': 'Gibbs',
'annealing': {'do_annealing': False,
  'initial_temperature': 10,
  'n_plateau': 10,
  'n_iter': 200}}
```

run(*model*: *AbstractModel*, **args*, *return_noise*: *bool* = *False*, ***extra_kwargs*) → Any
Main method, run the algorithm.

TODO fix proper abstract class method: input depends on algorithm... (esp. simulate != from others...)

Parameters

model [*AbstractModel*] The used model.

dataset [*Dataset*] Contains all the subjects' observations with corresponding timepoints, in torch format to speed up computations.

return_noise [*bool* (default *False*), keyword only] Should the algorithm return main output and optional noise output as a 2-tuple?

Returns

Depends on algorithm class: TODO change?

See also:

AbstractFitAlgo

AbstractPersonalizeAlgo

SimulationAlgorithm

run_impl(*model*: *AbstractModel*, *dataset*: *Dataset*)

Main method, run the algorithm.

Basically, it initializes the *CollectionRealization* object, updates it using the *iteration* method then returns it.

TODO fix proper abstract class

Parameters

model [*AbstractModel*] The used model.

dataset [*Dataset*] Contains the subjects' observations in torch format to speed up computation.

Returns

2-tuple:

- **realizations** [*CollectionRealization*] The optimized parameters.
- None : placeholder for noise-std

set_output_manager(*output_settings*)

Set a *FitOutputManager* object for the run of the algorithm

Parameters

output_settings [*OutputsSettings*] Contains the logs settings for the computation run
(console print periodicity, plot periodicity ...)

Examples

```
>>> from leaspy import AlgorithmSettings
>>> from leaspy.io.settings.outputs_settings import OutputsSettings
>>> from leaspy.algo.fit.tensor_mcmc_saem import TensorMCMCSAEM
>>> algo_settings = AlgorithmSettings("mcmc_saem")
>>> my_algo = TensorMCMCSAEM(algo_settings)
>>> settings = {'path': 'brouillons',
   'console_print_periodicity': 50,
   'plot_periodicity': 100,
   'save_periodicity': 50
}
>>> my_algo.set_output_manager(OutputsSettings(settings))
```

leaspy.algo.fit.abstract_mcmc.AbstractFitMCMC

class AbstractFitMCMC(*settings*)
Bases: leaspy.algo.utils.algo_with_annealing.AlgoWithAnnealingMixin, leaspy.algo.utils.samplers.algo_with_samplers.AlgoWithSamplersMixin, *leaspy.algo.fit.abstract_fit_algo.AbstractFitAlgo*

Abstract class containing common method for all *fit* algorithm classes based on *Monte-Carlo Markov Chains* (MCMC).

Parameters

settings [*AlgorithmSettings*] MCMC fit algorithm settings

See also:

leaspy.algo.utils.samplers

Attributes

samplers [dict[str, *AbstractSampler*]] Dictionary of samplers per each variable

random_order_variables [bool (default True)] This attribute controls whether we randomize the order of variables at each iteration. Article <https://proceedings.neurips.cc/paper/2016/hash/e4da3b7fbce2345d7772b0674a318d5-Abstract.html> gives a rationale on why we should activate this flag.

temperature [float]

temperature_inv [float] Temperature and its inverse (modified during algorithm when using annealing)

Methods

<code>iteration</code> (dataset, model, realizations)	MCMC-SAEM iteration.
<code>load_parameters</code> (parameters)	Update the algorithm's parameters by the ones in the given dictionary.
<code>run</code> (model, *args[, return_noise])	Main method, run the algorithm.
<code>run_impl</code> (model, dataset)	Main method, run the algorithm.
<code>set_output_manager</code> (output_settings)	Set a <code>FitOutputManager</code> object for the run of the algorithm

iteration(dataset: `Dataset`, model: `AbstractModel`, realizations: `CollectionRealization`)

MCMC-SAEM iteration.

1. Sample : MC sample successively of the population and individual variables
2. Maximization step : update model parameters from current population/individual variables values.

Parameters

dataset [`Dataset`]
model [`AbstractModel`]
realizations [`CollectionRealization`]

load_parameters(parameters: `dict`)

Update the algorithm's parameters by the ones in the given dictionary. The keys in the io which does not belong to the algorithm's parameters keys are ignored.

Parameters

parameters [`dict`] Contains the pairs (key, value) of the wanted parameters

Examples

```
>>> settings = leaspy.io.settings.algorithm_settings.AlgorithmSettings("mcmc_
->>> saem")
>>> my_algo = leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM(settings)
>>> my_algo.algo_parameters
{'n_iter': 10000,
 'n_burn_in_iter': 9000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
   'initial_temperature': 10,
   'n_plateau': 10,
   'n_iter': 200}}
>>> parameters = {'n_iter': 5000, 'n_burn_in_iter': 4000}
>>> my_algo.load_parameters(parameters)
>>> my_algo.algo_parameters
{'n_iter': 5000,
 'n_burn_in_iter': 4000,
```

(continues on next page)

(continued from previous page)

```
'eps': 0.001,
'L': 10,
'sampler_ind': 'Gibbs',
'sampler_pop': 'Gibbs',
'annealing': {'do_annealing': False,
              'initial_temperature': 10,
              'n_plateau': 10,
              'n_iter': 200}}
```

run(model: AbstractModel, *args, return_noise: bool = False, **extra_kwargs) → Any

Main method, run the algorithm.

TODO fix proper abstract class method: input depends on algorithm... (esp. simulate != from others...)

Parameters**model** [AbstractModel] The used model.**dataset** [Dataset] Contains all the subjects' observations with corresponding timepoints, in torch format to speed up computations.**return_noise** [bool (default False), keyword only] Should the algorithm return main output and optional noise output as a 2-tuple?**Returns****Depends on algorithm class: TODO change?****See also:**[AbstractFitAlgo](#)[AbstractPersonalizeAlgo](#)[SimulationAlgorithm](#)**run_impl**(model: AbstractModel, dataset: Dataset)

Main method, run the algorithm.

Basically, it initializes the *CollectionRealization* object, updates it using the *iteration* method then returns it.

TODO fix proper abstract class

Parameters**model** [AbstractModel] The used model.**dataset** [Dataset] Contains the subjects' observations in torch format to speed up computation.**Returns****2-tuple:**

- **realizations** [CollectionRealization] The optimized parameters.
- None : placeholder for noise-std

set_output_manager(output_settings)

Set a FitOutputManager object for the run of the algorithm

Parameters

output_settings [*OutputsSettings*] Contains the logs settings for the computation run
(console print periodicity, plot periodicity ...)

Examples

```
>>> from leaspy import AlgorithmSettings
>>> from leaspy.io.settings.outputs_settings import OutputsSettings
>>> from leaspy.algo.fit.tensor_mcmcsaem import TensorMCMCSAEM
>>> algo_settings = AlgorithmSettings("mcmc_saem")
>>> my_algo = TensorMCMCSAEM(algo_settings)
>>> settings = {'path': 'brouillons',
   'console_print_periodicity': 50,
   'plot_periodicity': 100,
   'save_periodicity': 50
}
>>> my_algo.set_output_manager(OutputsSettings(settings))
```

leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM

class TensorMCMCSAEM(*settings*)
Bases: *leaspy.algo.fit.abstract_mcmc.AbstractFitMCMC*

Main algorithm for MCMC-SAEM.

Parameters

settings [*AlgorithmSettings*] MCMC fit algorithm settings

See also:

AbstractFitMCMC

Methods

iteration (dataset, model, realizations)	MCMC-SAEM iteration.
load_parameters (parameters)	Update the algorithm's parameters by the ones in the given dictionary.
run (model, *args[, return_noise])	Main method, run the algorithm.
run_impl (model, dataset)	Main method, run the algorithm.
set_output_manager (output_settings)	Set a <i>FitOutputManager</i> object for the run of the algorithm

iteration(dataset: *Dataset*, model: *AbstractModel*, realizations: *CollectionRealization*)

MCMC-SAEM iteration.

1. Sample : MC sample successively of the population and individual variables
2. Maximization step : update model parameters from current population/individual variables values.

Parameters

dataset [*Dataset*]

model [*AbstractModel*]

realizations [*CollectionRealization*]**load_parameters**(*parameters*: *dict*)

Update the algorithm's parameters by the ones in the given dictionary. The keys in the io which does not belong to the algorithm's parameters keys are ignored.

Parameters

parameters [*dict*] Contains the pairs (key, value) of the wanted parameters

Examples

```
>>> settings = leaspy.io.settings.algorithm_settings.AlgorithmSettings("mcmc_"
->>> "saem")
>>> my_algo = leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM(settings)
>>> my_algo.algo_parameters
{'n_iter': 10000,
 'n_burn_in_iter': 9000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
   'initial_temperature': 10,
   'n_plateau': 10,
   'n_iter': 200}}
>>> parameters = {'n_iter': 5000, 'n_burn_in_iter': 4000}
>>> my_algo.load_parameters(parameters)
>>> my_algo.algo_parameters
{'n_iter': 5000,
 'n_burn_in_iter': 4000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
   'initial_temperature': 10,
   'n_plateau': 10,
   'n_iter': 200}}
```

run(*model*: *AbstractModel*, **args*, *return_noise*: *bool* = *False*, ***extra_kwargs*) → Any

Main method, run the algorithm.

TODO fix proper abstract class method: input depends on algorithm... (esp. simulate != from others...)

Parameters

model [*AbstractModel*] The used model.

dataset [*Dataset*] Contains all the subjects' observations with corresponding timepoints, in torch format to speed up computations.

return_noise [*bool* (default *False*), keyword only] Should the algorithm return main output and optional noise output as a 2-tuple?

Returns

Depends on algorithm class: TODO change?

See also:

[AbstractFitAlgo](#)

[AbstractPersonalizeAlgo](#)

[SimulationAlgorithm](#)

run_impl(*model*: AbstractModel, *dataset*: Dataset)

Main method, run the algorithm.

Basically, it initializes the [CollectionRealization](#) object, updates it using the *iteration* method then returns it.

TODO fix proper abstract class

Parameters

model [[AbstractModel](#)] The used model.

dataset [[Dataset](#)] Contains the subjects' observations in torch format to speed up computation.

Returns

2-tuple:

- **realizations** [[CollectionRealization](#)] The optimized parameters.
- None : placeholder for noise-std

set_output_manager(*output_settings*)

Set a FitOutputManager object for the run of the algorithm

Parameters

output_settings [[OutputsSettings](#)] Contains the logs settings for the computation run
(console print periodicity, plot periodicity ...)

Examples

```
>>> from leaspy import AlgorithmSettings
>>> from leaspy.io.settings.outputs_settings import OutputsSettings
>>> from leaspy.algo.fit.tensor_mcmcsaem import TensorMCMCSAEM
>>> algo_settings = AlgorithmSettings("mcmc_saem")
>>> my_algo = TensorMCMCSAEM(algo_settings)
>>> settings = {'path': 'brouillons',
   ...             'console_print_periodicity': 50,
   ...             'plot_periodicity': 100,
   ...             'save_periodicity': 50
   ... }
>>> my_algo.set_output_manager(OutputsSettings(settings))
```

3.3.4 leaspy.algo.personalize: Personalization algorithms

Algorithms used to personalize a model to given subjects.

<code>abstract_personalize_algo. AbstractPersonalizeAlgo(...)</code>	Abstract class for <i>personalize</i> algorithm.
<code>scipy_minimize.ScipyMinimize(settings)</code>	Gradient descent based algorithm to compute individual parameters, <i>i.e.</i> personalize a model to a given set of subjects.

`leaspy.algo.personalize.abstract_personalize_algo.AbstractPersonalizeAlgo`

```
class AbstractPersonalizeAlgo(settings: AlgorithmSettings)
Bases: leaspy.algo.abstract_algo.AbstractAlgo
```

Abstract class for *personalize* algorithm. Estimation of individual parameters of a given *Data* file with a frozen model (already estimated, or loaded from known parameters).

Parameters

`settings` [*AlgorithmSettings*] Settings of the algorithm.

See also:

`Leaspy.personalize()`

Attributes

`name` [str] Algorithm's name.

`seed` [int, optional] Algorithm's seed (default None).

`algo_parameters` [dict] Algorithm's parameters.

Methods

<code>load_parameters(parameters)</code>	Update the algorithm's parameters by the ones in the given dictionary.
<code>run(model, *args[, return_noise])</code>	Main method, run the algorithm.
<code>run_impl(model, dataset)</code>	Main <i>personalize</i> function, wraps the abstract <code>_get_individual_parameters()</code> method.
<code>set_output_manager(output_settings)</code>	Set a <code>FitOutputManager</code> object for the run of the algorithm

`load_parameters(parameters: dict)`

Update the algorithm's parameters by the ones in the given dictionary. The keys in the io which does not belong to the algorithm's parameters keys are ignored.

Parameters

`parameters` [dict] Contains the pairs (key, value) of the wanted parameters

Examples

```
>>> settings = leaspy.io.settings.algorithm_settings.AlgorithmSettings("mcmc_
->saem")
>>> my_algo = leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM(settings)
>>> my_algo.algo_parameters
{'n_iter': 10000,
 'n_burn_in_iter': 9000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
   'initial_temperature': 10,
   'n_plateau': 10,
   'n_iter': 200}}
>>> parameters = {'n_iter': 5000, 'n_burn_in_iter': 4000}
>>> my_algo.load_parameters(parameters)
>>> my_algo.algo_parameters
{'n_iter': 5000,
 'n_burn_in_iter': 4000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
   'initial_temperature': 10,
   'n_plateau': 10,
   'n_iter': 200}}
```

run(*model: AbstractModel*, **args*, *return_noise: bool* = *False*, ***extra_kwargs*) → Any

Main method, run the algorithm.

TODO fix proper abstract class method: input depends on algorithm... (esp. simulate != from others...)

Parameters

model [*AbstractModel*] The used model.

dataset [*Dataset*] Contains all the subjects' observations with corresponding timepoints, in torch format to speed up computations.

return_noise [bool (default *False*), keyword only] Should the algorithm return main output and optional noise output as a 2-tuple?

Returns

Depends on algorithm class: TODO change?

See also:

[*AbstractFitAlgo*](#)

[*AbstractPersonalizeAlgo*](#)

[*SimulationAlgorithm*](#)

run_impl(*model*, *dataset*)

Main personalize function, wraps the abstract *_get_individual_parameters()* method.

Parameters

model [*AbstractModel*] A subclass object of leaspy *AbstractModel*.

dataset [*Dataset*] Dataset object build with leaspy class objects Data, algo & model

Returns

individual_parameters [*IndividualParameters*] Contains individual parameters.

noise_std [float or *torch.FloatTensor*] The estimated noise (is a tensor if *model.noise_model* is 'gaussian_diagonal')

$$= \frac{1}{n_{visits} \times n_{dim}} \sqrt{\sum_{i,j \in [1,n_{visits}] \times [1,n_{dim}]} \varepsilon_{i,j}}$$

where $\varepsilon_{i,j} = (f(\theta, (z_{i,j}), (t_{i,j})) - (y_{i,j}))^2$, where θ are the model's fixed effect, $(z_{i,j})$ the model's random effects, $(t_{i,j})$ the time-points and f the model's estimator.

set_output_manager(*output_settings*)

Set a *FitOutputManager* object for the run of the algorithm

Parameters

output_settings [*OutputsSettings*] Contains the logs settings for the computation run
(console print periodicity, plot periodicity ...)

Examples

```
>>> from leaspy import AlgorithmSettings
>>> from leaspy.io.settings.outputs_settings import OutputsSettings
>>> from leaspy.algo.fit.tensor_mcmc_saem import TensorMCMCSAEM
>>> algo_settings = AlgorithmSettings("mcmc_saem")
>>> my_algo = TensorMCMCSAEM(algo_settings)
>>> settings = {'path': 'brouillons',
   'console_print_periodicity': 50,
   'plot_periodicity': 100,
   'save_periodicity': 50
}
>>> my_algo.set_output_manager(OutputsSettings(settings))
```

leaspy.algo.personalize.scipy_minimize.ScipyMinimize

class ScipyMinimize(*settings*)

Bases: *leaspy.algo.personalize.abstract_personalize_algo.AbstractPersonalizeAlgo*

Gradient descent based algorithm to compute individual parameters, *i.e.* personalize a model to a given set of subjects.

Parameters

settings [*AlgorithmSettings*] Settings of the algorithm. In particular the parameter *custom_scipy_minimize_params* may contain keyword arguments passed to *scipy.optimize.minimize()*.

Attributes

scipy_minimize_params [dict] Keyword arguments to be passed to `scipy.optimize.minimize()`. A default setting depending on whether using jacobian or not is applied (cf. `ScipyMinimize.DEFAULT SCIPY_MINIMIZE_PARAMS_WITH_JACOBIAN` and `ScipyMinimize.DEFAULT SCIPY_MINIMIZE_PARAMS_WITHOUT_JACOBIAN`).

You may customize it by setting the `custom_scipy_minimize_params` algorithm parameter.

format_convergence_issues [str] Formatting of convergence issues. It should be a format-table string using any of those variables:

- patient_id: str
- optimization_result_pformat: str
- (optimization_result_obj: dict-like)

cf. `ScipyMinimize.DEFAULT FORMAT CONVERGENCE_ISSUES` for the default format. You may customize it by setting the `custom_format_convergence_issues` algorithm parameter.

logger [None or callable str -> None] The function used to display convergence issues returned by `scipy.optimize.minimize()`. By default we print the convergences issues if and only if we do not use BFGS optimization method. You can customize it at initialization by defining a `logger` attribute to your `AlgorithmSettings` instance.

Methods

<code>is_jacobian_implemented(model)</code>	Check that the jacobian of model is implemented.
<code>load_parameters(parameters)</code>	Update the algorithm's parameters by the ones in the given dictionary.
<code>obj(x, *args)</code>	Objective loss function to minimize in order to get patient's individual parameters
<code>run(model, *args[, return_noise])</code>	Main method, run the algorithm.
<code>run_impl(model, dataset)</code>	Main personalize function, wraps the abstract <code>_get_individual_parameters()</code> method.
<code>set_output_manager(output_settings)</code>	Set a <code>FitOutputManager</code> object for the run of the algorithm

is_jacobian_implemented(model) → bool

Check that the jacobian of model is implemented.

load_parameters(parameters: dict)

Update the algorithm's parameters by the ones in the given dictionary. The keys in the io which does not belong to the algorithm's parameters keys are ignored.

Parameters

parameters [dict] Contains the pairs (key, value) of the wanted parameters

Examples

```
>>> settings = leaspy.io.settings.algorithm_settings.AlgorithmSettings("mcmc_
->saem")
>>> my_algo = leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM(settings)
>>> my_algo.algo_parameters
{'n_iter': 10000,
 'n_burn_in_iter': 9000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
               'initial_temperature': 10,
               'n_plateau': 10,
               'n_iter': 200}}
>>> parameters = {'n_iter': 5000, 'n_burn_in_iter': 4000}
>>> my_algo.load_parameters(parameters)
>>> my_algo.algo_parameters
{'n_iter': 5000,
 'n_burn_in_iter': 4000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
               'initial_temperature': 10,
               'n_plateau': 10,
               'n_iter': 200}}
```

obj(*x*, **args*)

Objective loss function to minimize in order to get patient's individual parameters

Parameters

x [array-like [float]] Individual **standardized** parameters At initialization **x** = [$x_i - \bar{x}_i$ / σ_{x_i} , $\tau_u - \bar{\tau}_u$ / σ_{τ_u}] (+ [0.] * n_sources if multivariate model)

**args*

- **model** [*AbstractModel*] Model used to compute the group average parameters.
- **timepoints** [*torch.Tensor* [1,n_tpts]] Contains the individual ages corresponding to the given values
- **values** [*torch.Tensor* [n_tpts, n_fts]] Contains the individual true scores corresponding to the given **times**, with nans.
- **with_gradient** [bool]
 - If True: return (objective, gradient_objective)
 - Else: simply return objective

Returns

objective [float] Value of the loss function (opposite of log-likelihood).

if **with_gradient** is True:

2-tuple (as expected by `scipy.optimize.minimize()` when `jac=True`)

- objective : float
- gradient : array-like[float] of length n_dims_params

Raises

LeaspyAlgoInputError if noise model is not currently supported by algorithm. TODO: everything that is not generic here concerning noise structure should be handle by model/NoiseModel directly!!!!

run(*model*: `AbstractModel`, **args*, *return_noise*: `bool` = `False`, ***extra_kwargs*) → Any
Main method, run the algorithm.

TODO fix proper abstract class method: input depends on algorithm... (esp. simulate != from others...)

Parameters

model [`AbstractModel`] The used model.

dataset [`Dataset`] Contains all the subjects' observations with corresponding time-points, in torch format to speed up computations.

return_noise [bool (default False), keyword only] Should the algorithm return main output and optional noise output as a 2-tuple?

Returns

Depends on algorithm class: TODO change?

See also:

[`AbstractFitAlgo`](#)

[`AbstractPersonalizeAlgo`](#)

[`SimulationAlgorithm`](#)

run_impl(*model*, *dataset*)

Main personalize function, wraps the abstract `_get_individual_parameters()` method.

Parameters

model [`AbstractModel`] A subclass object of leaspy `AbstractModel`.

dataset [`Dataset`] Dataset object build with leaspy class objects Data, algo & model

Returns

individual_parameters [`IndividualParameters`] Contains individual parameters.

noise_std [float or `torch.FloatTensor`] The estimated noise (is a tensor if *model.noise_model* is 'gaussian_diagonal')

$$= \frac{1}{n_{visits} \times n_{dim}} \sqrt{\sum_{i,j \in [1,n_{visits}] \times [1,n_{dim}]} \varepsilon_{i,j}}$$

where $\varepsilon_{i,j} = (f(\theta, (z_{i,j}), (t_{i,j})) - (y_{i,j}))^2$, where θ are the model's fixed effect, $(z_{i,j})$ the model's random effects, $(t_{i,j})$ the time-points and f the model's estimator.

set_output_manager(*output_settings*)

Set a `FitOutputManager` object for the run of the algorithm

Parameters

output_settings [*OutputsSettings*] Contains the logs settings for the computation run (console print periodicity, plot periodicity ...)

Examples

```
>>> from leaspy import AlgorithmSettings
>>> from leaspy.io.settings.outputs_settings import OutputsSettings
>>> from leaspy.algo.fit.tensor_mcmc_saem import TensorMCMCSAEM
>>> algo_settings = AlgorithmSettings("mcmc_saem")
>>> my_algo = TensorMCMCSAEM(algo_settings)
>>> settings = {'path': 'brouillons',
   'console_print_periodicity': 50,
   'plot_periodicity': 100,
   'save_periodicity': 50
}
>>> my_algo.set_output_manager(OutputsSettings(settings))
```

3.3.5 leaspy.algo.simulate: Simulation algorithms

Algorithm to simulate synthetic observations and individual parameters.

<code>simulate.SimulationAlgorithm(settings)</code>	To simulate new data given existing one by learning the individual parameters joined distribution.
---	--

leaspy.algo.simulate.simulate.SimulationAlgorithm

```
class SimulationAlgorithm(settings)
    Bases: leaspy.algo.abstract_algo.AbstractAlgo
```

To simulate new data given existing one by learning the individual parameters joined distribution.

You can choose to only learn the distribution of a group of patient. To do so, choose the cofactor(s) and the cofactor(s) state of the wanted patient in the settings. For instance, for an Alzheimer's disease patient, you can load a genetic cofactor informative of the APOE4 carriers. Choose cofactor ['genetic'] and cofactor_state ['APOE4'] to simulate only APOE4 carriers.

Parameters

settings [*AlgorithmSettings*] The algorithm settings. They may include the following parameters, described in __Attributes__ section:

- *noise*
- *bandwidth_method*
- *cofactor*
- *cofactor_state*
- *number_of_subjects*
- *mean_number_of_visits*, *std_number_of_visits*, *min_number_of_visits*,
 max_number_of_visits
- *delay_btwn_visits*
- *reparametrized_age_bounds*

- *sources_method*
- *prefix*
- *features_bounds*
- *features_bounds_nb_subjects_factor*

Raises

LeaspyAlgoInputError If algorithm parameters are of bad type or do not comply to detailed requirements.

Notes

The baseline ages are no more jointly learnt with individual parameters. Instead, we jointly learn the _reparametrized_ baseline ages, together with individual parameters. The baseline ages are then reconstructed from the simulated reparametrized baseline ages and individual parameters.

By definition, the relation between age and reparametrized age is:

$$\psi_i(t) = e^{\xi_i}(t - \tau_i) + \bar{\tau}$$

with t the real age, $\psi_i(t)$ the reparametrized age, ξ_i the individual log-acceleration parameter, τ_i the individual time-shift parameter and $\bar{\tau}$ the mean conversion age derived by the *model* object.

One can restrict the interval of the baseline reparametrized age to be _learnt_ in kernel, by setting bounds in *reparametrized_age_bounds*. Note that the simulated reparametrized baseline ages are unconstrained and thus could, theoretically (but very unlikely), be out of these prescribed bounds.

Attributes

- name** ['simulation'] Algorithm's name.
- seed** [int] Used by `numpy.random` & `torch.random` for reproducibility.
- algo_parameters** [dict] Contains the algorithm's parameters.
- bandwidth_method** [float or str or callable, optional] Bandwidth argument used in `scipy.stats.gaussian_kde` in order to learn the patients' distribution.
- cofactor** [list[str], optional (default = None)] The list of cofactors included used to select the wanted group of patients (ex - ['genetic']). All of them must correspond to an existing cofactor in the attribute *Data* of the input *result* of the `run()` method. TODO? should we allow to learn joint distribution of individual parameters and numeric/categorical cofactors (not fixed)?
- cofactor_state** [list[str], optional (default None)] The cofactors states used to select the wanted group of patients (ex - ['APOE4']). There is exactly one state per cofactor in *cofactor* (same order). It must correspond to an existing cofactor state in the attribute *Data* of the input *result* of the `run()` method. TODO? it could be replaced by methods to easily sub-select individual having certain cofactors PRIOR to running this algorithm + the functionality described just above (included varying cofactors as part of the distribution to estimate).
- features_bounds** [bool or dict[str, (float, float)] (default False)] Specify if the scores of the generated subjects must be bounded. This parameter can express in two way:
 - *bool* : the bounds are the maximum and minimum scores observed in the baseline data (TODO: “baseline” instead?).

- *dict* : the user has to set the min and max bounds for every features. For example: `{'feature1': (score_min, score_max), 'feature2': (score_min, score_max), ...}`

features_bounds_nb_subjects_factor [float > 1 (default 10)] Only used if *features_bounds* is not False. The ratio of simulated subjects (> 1) so that there is at least *number_of_subjects* that comply to features bounds constraint.

mean_number_of_visits [int or float (default 6)] Average number of visits of the simulated patients. Examples - choose 5 => in average, a simulated patient will have 5 visits.

std_number_of_visits [int or float > 0, or None (default 3)] Standard deviation used into the generation of the number of visits per simulated patient. If <= 0 or None: number of visits will be deterministic

min_number_of_visits, max_number_of_visits [int (optional for max)] Minimum (resp. maximum) number of visits. Only used when *std_number_of_visits* > 0. *min_number_of_visits* should be >= 1 (default), *max_number_of_visits* can be None (no limit, default).

delay_btw_visits

Control by how many years consecutive visits of a patient are delayed. Multiple options are possible:

- float > 0 : regular spacing between all visits
- dictionary : {‘min’: float > 0, ‘mean’: float >= min, ‘std’: float > 0 [, ‘max’: float >= mean]}

Specify a Gaussian random spacing (truncated between min, and max if given) * function : n (int >= 1) => 1D numpy.ndarray[float > 0] of length *n* giving delay between visits (e.g.: 3 => [0.5, 1.5, 1.])

noise [str or float or array-like[float], optional]

Wanted level of gaussian noise in the generated scores:

- Set noise to None will lead to patients follow the model exactly (no noise added).
- Set to ‘inherit_struct’ (or deprecated ‘default’), the noise added will follow the model noise structure and for Gaussian noise it will be computed from reconstruction errors on data & individual parameters provided.
- Set noise to ‘model’, the noise added will follow the model noise structure as well as its values.
- Set to ‘bernoulli’, to simulate Bernoulli realizations.
- Set a float will add for each feature’s scores a noise of standard deviation the given float (‘gaussian_scalar’ noise).
- Set an array-like[float] (1D of length *n_features*) will add for the feature *j* a noise of standard deviation **noise[j]** (‘gaussian_diagonal’ noise).

number_of_subjects [int > 0] Number of subject to simulate.

reparametrized_age_bounds [tuple[float, float], optional (default None)] Define the minimum and maximum reparametrized ages of subjects included in the kernel estimation. See Notes section. Example: **reparametrized_age_bounds = (65, 70)**

sources_method [str in {‘full_kde’, ‘normal_sources’}]

- 'full_kde' : the sources are also learned with the gaussian kernel density estimation.
- 'normal_sources' : the sources are generated as multivariate normal distribution linked with the other individual parameters.

prefix [str] Prefix appended to simulated patients' identifiers

Methods

<code>load_parameters(parameters)</code>	Update the algorithm's parameters by the ones in the given dictionary.
<code>run(model, *args[, return_noise])</code>	Main method, run the algorithm.
<code>run_imple(model, individual_parameters, data)</code>	Run simulation - learn joined distribution of patients' individual parameters and return a results object containing the simulated individual parameters and the simulated scores.
<code>set_output_manager(output_settings)</code>	Set a <code>FitOutputManager</code> object for the run of the algorithm

load_parameters(parameters: *dict*)

Update the algorithm's parameters by the ones in the given dictionary. The keys in the io which does not belong to the algorithm's parameters keys are ignored.

Parameters

parameters [dict] Contains the pairs (key, value) of the wanted parameters

Examples

```
>>> settings = leaspy.io.settings.algorithm_settings.AlgorithmSettings("mcmc_
    ↪saem")
>>> my_algo = leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM(settings)
>>> my_algo.algo_parameters
{'n_iter': 10000,
 'n_burn_in_iter': 9000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
               'initial_temperature': 10,
               'n_plateau': 10,
               'n_iter': 200}}
>>> parameters = {'n_iter': 5000, 'n_burn_in_iter': 4000}
>>> my_algo.load_parameters(parameters)
>>> my_algo.algo_parameters
{'n_iter': 5000,
 'n_burn_in_iter': 4000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
```

(continues on next page)

(continued from previous page)

```
'sampler_pop': 'Gibbs',
'annealing': {'do_annealing': False,
'initial_temperature': 10,
'n_plateau': 10,
'n_iter': 200}}
```

run(*model*: *AbstractModel*, **args*, *return_noise*: *bool* = *False*, ***extra_kwargs*) → Any

Main method, run the algorithm.

TODO fix proper abstract class method: input depends on algorithm... (esp. simulate != from others...)

Parameters**model** [*AbstractModel*] The used model.**dataset** [*Dataset*] Contains all the subjects' observations with corresponding time-points, in torch format to speed up computations.**return_noise** [*bool* (default *False*), keyword only] Should the algorithm return main output and optional noise output as a 2-tuple?**Returns****Depends on algorithm class: TODO change?****See also:**[*AbstractFitAlgo*](#)[*AbstractPersonalizeAlgo*](#)[*SimulationAlgorithm*](#)**run_impl**(*model*: *AbstractModel*, *individual_parameters*: *IndividualParameters*, *data*: *Data*) →Tuple[*Result*, Optional[*torch.FloatTensor*]]

Run simulation - learn joined distribution of patients' individual parameters and return a results object containing the simulated individual parameters and the simulated scores.

<!> The *AbstractAlgo.run* signature is not respected for simulation algorithm... TODO: respect it... at least use (*model*, *dataset*, *individual_parameters*) signature...**Parameters****model** [*AbstractModel*] Subclass object of *AbstractModel*. Model used to compute the population & individual parameters. It contains the population parameters.**individual_parameters** [*IndividualParameters*] Object containing the computed individual parameters.**data** [*Data*] The data object.**Returns****Result** Contains the simulated individual parameters & individual scores.

Notes

In simulation_settings, one can specify in the parameters the cofactor & cofactor_state. By doing so, one can simulate based only on the subject for the given cofactor & cofactor's state.

By default, all the subjects provided are used to estimate the joined distribution.

`set_output_manager(output_settings)`

Set a FitOutputManager object for the run of the algorithm

Parameters

`output_settings [OutputsSettings]` Contains the logs settings for the computation run (console print periodicity, plot periodicity ...)

Examples

```
>>> from leaspy import AlgorithmSettings
>>> from leaspy.io.settings.outputs_settings import OutputsSettings
>>> from leaspy.algo.fit.tensor_mcmc_saem import TensorMCMCSAEM
>>> algo_settings = AlgorithmSettings("mcmc_saem")
>>> my_algo = TensorMCMCSAEM(algo_settings)
>>> settings = {'path': 'brouillons',
   >>>                 'console_print_periodicity': 50,
   >>>                 'plot_periodicity': 100,
   >>>                 'save_periodicity': 50
   >>>             }
>>> my_algo.set_output_manager(OutputsSettings(settings))
```

3.3.6 `leaspy.algo.others`: Other algorithms

Reference algorithms to use with reference models (for benchmarks).

<code>constant_prediction_algo.</code>	ConstantPredictionAlgorithm is the algorithm that outputs a constant prediction
<code>ConstantPredictionAlgorithm(...)</code>	
<code>lme_fit.LMEFitAlgorithm(settings)</code>	Calibration algorithm associated to LMEModel

`leaspy.algo.others.constant_prediction_algo.ConstantPredictionAlgorithm`

`class ConstantPredictionAlgorithm(settings)`

Bases: `leaspy.algo.abstract_algo.AbstractAlgo`

ConstantPredictionAlgorithm is the algorithm that outputs a constant prediction

It is associated to `ConstantModel`

TODO: it should be a child of `AbstractPersonalizeAlgorithm` (refactoring needed)

Parameters

`settings [AlgorithmSettings]` The settings of constant prediction algorithm. It may define `prediction_type` (str):

- 'last': last value seen during calibration (even if NaN) [default],

- 'last_known': last non NaN value seen during calibration*§,
- 'max': maximum (=worst) value seen during calibration*§,
- 'mean': average of values seen during calibration§.

* <!> depending on features, the *last_known / max* value may correspond to different visits.
 § <!> for a given feature, value will be NaN if and only if all values for this feature were NaN.

Raises

LeaspyAlgoInputError If any invalid setting for the algorithm

Methods

<code>load_parameters(parameters)</code>	Update the algorithm's parameters by the ones in the given dictionary.
<code>run(model, *args[, return_noise])</code>	Main method, run the algorithm.
<code>run_impl(model, dataset)</code>	Main method, refer to abstract definition in <code>run()</code> .
<code>set_output_manager(output_settings)</code>	Not implemented.

`load_parameters(parameters: dict)`

Update the algorithm's parameters by the ones in the given dictionary. The keys in the io which does not belong to the algorithm's parameters keys are ignored.

Parameters

parameters [dict] Contains the pairs (key, value) of the wanted parameters

Examples

```
>>> settings = leaspy.io.settings.algorithm_settings.AlgorithmSettings("mcmc_
  ↪saem")
>>> my_algo = leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM(settings)
>>> my_algo.algo_parameters
{'n_iter': 10000,
 'n_burn_in_iter': 9000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
   'initial_temperature': 10,
   'n_plateau': 10,
   'n_iter': 200}}
>>> parameters = {'n_iter': 5000, 'n_burn_in_iter': 4000}
>>> my_algo.load_parameters(parameters)
>>> my_algo.algo_parameters
{'n_iter': 5000,
```

(continues on next page)

(continued from previous page)

```
'n_burn_in_iter': 4000,
'eps': 0.001,
'L': 10,
'sampler_ind': 'Gibbs',
'sampler_pop': 'Gibbs',
'annealing': {'do_annealing': False,
              'initial_temperature': 10,
              'n_plateau': 10,
              'n_iter': 200}}
```

run(model: AbstractModel, *args, return_noise: bool = False, **extra_kwargs) → Any

Main method, run the algorithm.

TODO fix proper abstract class method: input depends on algorithm... (esp. simulate != from others...)

Parameters**model** [*AbstractModel*] The used model.**dataset** [*Dataset*] Contains all the subjects' observations with corresponding time-points, in torch format to speed up computations.**return_noise** [bool (default False), keyword only] Should the algorithm return main output and optional noise output as a 2-tuple?**Returns****Depends on algorithm class: TODO change?****See also:***AbstractFitAlgo**AbstractPersonalizeAlgo**SimulationAlgorithm***run_impl(model: ConstantModel, dataset: Dataset)**Main method, refer to abstract definition in *run()*.**Parameters****model** [*ConstantModel*] A subclass object of leaspy *ConstantModel*.**dataset** [*Dataset*] Dataset object build with leaspy class objects Data, algo & model**Returns****individual_parameters** [*IndividualParameters*] Contains individual parameters.**noise_std** [float] TODO: always 0 for now**set_output_manager(output_settings)**

Not implemented.

leaspy.algo.others.lme_fit.LMEFitAlgorithm**class LMEFitAlgorithm(settings)**Bases: [leaspy.algo.abstract_algo.AbstractAlgo](#)Calibration algorithm associated to [LMEModel](#)**Parameters****settings** [[AlgorithmSettings](#)]

- **with_random_slope_age** [bool] If False: only varying intercepts If True: random intercept & random slope w.r.t ages

Deprecated since version 1.2.

You should rather define this directly as an hyperparameter of LME model.

- **force_independent_random_effects** [bool] Force independence of random intercept & random slope

- other keyword arguments passed to `statsmodels.regression.mixed_linear_model.MixedLM.fit()`

See also:[statsmodels.regression.mixed_linear_model.MixedLM](#)**Methods**

<code>load_parameters(parameters)</code>	Update the algorithm's parameters by the ones in the given dictionary.
<code>run(model, *args[, return_noise])</code>	Main method, run the algorithm.
<code>run_impl(model, dataset)</code>	Main method, refer to abstract definition in run() .
<code>set_output_manager(output_settings)</code>	Not implemented.

load_parameters(parameters: dict)

Update the algorithm's parameters by the ones in the given dictionary. The keys in the io which does not belong to the algorithm's parameters keys are ignored.

Parameters**parameters** [dict] Contains the pairs (key, value) of the wanted parameters**Examples**

```
>>> settings = leaspy.io.settings.algorithm_settings.AlgorithmSettings("mcmc_
    ↪saem")
>>> my_algo = leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM(settings)
>>> my_algo.algo_parameters
{'n_iter': 10000,
 'n_burn_in_iter': 9000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
```

(continues on next page)

(continued from previous page)

```
'initial_temperature': 10,
'n_plateau': 10,
'n_iter': 200}}
>>> parameters = {'n_iter': 5000, 'n_burn_in_iter': 4000}
>>> my_algo.load_parameters(parameters)
>>> my_algo.algo_parameters
{'n_iter': 5000,
'n_burn_in_iter': 4000,
'eps': 0.001,
'L': 10,
'sampler_ind': 'Gibbs',
'sampler_pop': 'Gibbs',
'annealing': {'do_annealing': False,
'initial_temperature': 10,
'n_plateau': 10,
'n_iter': 200}}
```

run(model: *AbstractModel*, *args, return_noise: *bool* = *False*, **extra_kwargs) → Any

Main method, run the algorithm.

TODO fix proper abstract class method: input depends on algorithm... (esp. simulate != from others...)

Parameters**model** [*AbstractModel*] The used model.**dataset** [*Dataset*] Contains all the subjects' observations with corresponding time-points, in torch format to speed up computations.**return_noise** [*bool* (default *False*), keyword only] Should the algorithm return main output and optional noise output as a 2-tuple?**Returns****Depends on algorithm class: TODO change?****See also:***AbstractFitAlgo**AbstractPersonalizeAlgo**SimulationAlgorithm***run_impl**(model: *LMEModel*, dataset: *Dataset*)Main method, refer to abstract definition in *run()*.

TODO fix proper inheritance

Parameters**model** [*LMEModel*] A subclass object of leaspy *LMEModel*.**dataset** [*Dataset*] Dataset object build with leaspy class objects Data, algo & model**Returns****2-tuple:**

- None
- noise scale (std-dev), scalar

set_output_manager(*output_settings*)
Not implemented.

leaspy.algo.others.lme_personalize.LMEPersonalizeAlgorithm

class LMEPersonalizeAlgorithm(*settings*: AlgorithmSettings)

Bases: *leaspy.algo.abstract_algo.AbstractAlgo*

Personalization algorithm associated to *LMEModel1*

TODO: it should be a child of *AbstractPersonalizeAlgorithm* (refactoring needed)

Parameters

settings [*AlgorithmSettings*] Algorithm settings (none yet). Most LME parameters are defined within LME model and LME fit algorithm.

Attributes

name ['lme_personalize']

Methods

load_parameters (<i>parameters</i>)	Update the algorithm's parameters by the ones in the given dictionary.
run (<i>model</i> , * <i>args</i> [, <i>return_noise</i>])	Main method, run the algorithm.
run_ilm (<i>model</i> , <i>dataset</i>)	Main method, refer to abstract definition in <i>run()</i> .
set_output_manager (<i>output_settings</i>)	Not implemented.

load_parameters(*parameters*: *dict*)

Update the algorithm's parameters by the ones in the given dictionary. The keys in the *io* which does not belong to the algorithm's parameters keys are ignored.

Parameters

parameters [*dict*] Contains the pairs (key, value) of the wanted parameters

Examples

```
>>> settings = leaspy.io.settings.algorithm_settings.AlgorithmSettings("mcmc_
    ↗saem")
>>> my_algo = leaspy.algo.fit.tensor_mcmcsaem.TensorMCMCSAEM(settings)
>>> my_algo.algo_parameters
{'n_iter': 10000,
 'n_burn_in_iter': 9000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
               'initial_temperature': 10,
               'n_plateau': 10,
               'n_iter': 200}}
>>> parameters = {'n_iter': 5000, 'n_burn_in_iter': 4000}
```

(continues on next page)

(continued from previous page)

```
>>> my_algo.load_parameters(parameters)
>>> my_algo.algo_parameters
{'n_iter': 5000,
 'n_burn_in_iter': 4000,
 'eps': 0.001,
 'L': 10,
 'sampler_ind': 'Gibbs',
 'sampler_pop': 'Gibbs',
 'annealing': {'do_annealing': False,
               'initial_temperature': 10,
               'n_plateau': 10,
               'n_iter': 200}}
```

run(*model*: AbstractModel, **args*, *return_noise*: bool = False, ***extra_kwargs*) → Any

Main method, run the algorithm.

TODO fix proper abstract class method: input depends on algorithm... (esp. simulate != from others...)

Parameters**model** [AbstractModel] The used model.**dataset** [Dataset] Contains all the subjects' observations with corresponding time-points, in torch format to speed up computations.**return_noise** [bool (default False), keyword only] Should the algorithm return main output and optional noise output as a 2-tuple?**Returns**

Depends on algorithm class: TODO change?

See also:[AbstractFitAlgo](#)[AbstractPersonalizeAlgo](#)[SimulationAlgorithm](#)**run_impl**(*model*, *dataset*)Main method, refer to abstract definition in *run()*.

TODO fix proper inheritance

Parameters**model** [*LMEModel*] A subclass object of leaspy *LMEModel*.**dataset** [Dataset] Dataset object build with leaspy class objects Data, algo & model**Returns****individual_parameters** [*IndividualParameters*] Contains individual parameters.**noise_std** [float] The estimated noise**set_output_manager**(*output_settings*)

Not implemented.

3.3.7 leaspy.algo.utils.samplers: Samplers

Samplers used by the MCMC algorithms.

<code>abstract_sampler.AbstractSampler(info, ...)</code>	Abstract sampler class.
<code>gibbs_sampler.GibbsSampler(info, n_patients, ...)</code>	Gibbs sampler class.

leaspy.algo.utils.samplers.abstract_sampler.AbstractSampler

class AbstractSampler(*info: Dict[str, Any]*, *n_patients: int*, *, *acceptation_history_length: int* = 25)

Bases: `abc.ABC`

Abstract sampler class.

Parameters

info [dict[str, Any]] The dictionary describing the random variable to sample. It should contains the following entries:

- **name** : str
- **shape** : tuple[int, ...]
- **type** : ‘population’ or ‘individual’

n_patients [int > 0] Number of patients (useful for individual variables)

acceptation_history_length [int > 0 (default 25)] Deepness (= number of iterations) of the history kept for computing the mean acceptation rate. (It is the same for population or individual variables.)

Raises

`LeaspyModelError`

Attributes

name [str] Name of variable

shape [tuple] Shape of variable

acceptation_history_length [int] Deepness (= number of iterations) of the history kept for computing the mean acceptation rate. (It is the same for population or individual variables.)

ind_param_dims_but_individual [tuple[int, ...], optional (only for individual variable)]
The dimension(s) to aggregate when computing regularity of individual parameters For now there’s only one extra dimension whether it’s tau, xi or sources but in the future it could be extended. We do not sum first dimension (=0) which will always be the dimension reserved for individuals.

acceptation_history [`torch.Tensor`] History of binary acceptations to compute mean acceptation rate for the sampler in MCMC-SAEM algorithm. It keeps the history of the last `acceptation_history_length` steps.

Methods

<code>sample(dataset, model, realizations, ...)</code>	Sample new realization (either population or individual) for a given realization state, dataset, model and temperature
--	--

`sample(dataset: Dataset, model: AbstractModel, realizations: CollectionRealization, temperature_inv: float,
**attachment_computation_kws) → Tuple[torch.FloatTensor, torch.FloatTensor]`
Sample new realization (either population or individual) for a given realization state, dataset, model and temperature
<!> Modifies in-place the realizations object, <!> as well as the model through its *update_MCMC_toolbox* for population variables.

Parameters

`dataset` [`Dataset`] Dataset class object build with leaspy class object Data, model & algo

`model` [`AbstractModel`] Model for loss computations and updates

`realizations` [`CollectionRealization`] Contain the current state & information of all the variables of interest

`temperature_inv` [float > 0] Inverse of the temperature used in tempered MCMC-SAEM

`**attachment_computation_kws` Optional keyword arguments for attachment computations. As of now, we only use it for individual variables, and only *attribute_type*. It is used to know whether to compute attachments from the MCMC toolbox (esp. during fit) or to compute it from regular model parameters (esp. during personalization in mean/mode realization)

Returns

`attachment, regularity_var` [`torch.FloatTensor` 0D (population variable) or 1D (individual variable, with length *n_individuals*)] The attachment and regularity (only for the current variable) at the end of this sampling step (globally or per individual, depending on variable type).

`leaspy.algo.utils.samplers.gibbs_sampler.GibbsSampler`

`class GibbsSampler(info: dict, n_patients: int, *, scale: Union[float, torch.FloatTensor],
random_order_dimension: bool = True, mean_acceptation_rate_target_bounds:
Tuple[float, float] = (0.2, 0.4), adaptive_std_factor: float = 0.1, **base_sampler_kws)`
Bases: `leaspy.algo.utils.samplers.abstract_sampler.AbstractSampler`

Gibbs sampler class.

Parameters

`info` [dict[str, Any]] The dictionary describing the random variable to sample. It should contains the following entries:

- name : str
- shape : tuple[int, ...]
- type : ‘population’ or ‘individual’

n_patients [int > 0] Number of patients (useful for individual variables)

scale [float > 0 or torch.FloatTensor > 0] An approximate scale for the variable. It will be used to scale the initial adaptive std-dev used in sampler. An extra factor will be applied on top of this scale (hyperparameters):

- 1% for population parameters (`GibbsSampler.STD_SCALE_FACTOR_POP`)
- 50% for individual parameters (`GibbsSampler.STD_SCALE_FACTOR_IND`)

Note that if you pass a torch tensor, its shape should be compatible with shape of the variable.

random_order_dimension [bool (default True)] This parameter controls whether we randomize the order of indices during the sampling loop. (only for population variables, since we perform group sampling for individual variables) Article <https://proceedings.neurips.cc/paper/2016/hash/e4da3b7fbce2345d7772b0674a318d5-Abstract.html> gives a rationale on why we should activate this flag.

mean_acceptation_rate_target_bounds [tuple[lower_bound: float, upper_bound: float]] with $0 < \text{lower_bound} < \text{upper_bound} < 1$] Bounds on mean acceptation rate. Outside this range, the adaptation of the std-dev of sampler is triggered so to maintain a target acceptation rate in between these two bounds (e.g: ~30%).

adaptive_std_factor [float in]0, 1[] Factor by which we increase or decrease the std-dev of sampler when we are out of the custom bounds for the mean acceptation rate. We decrease it by $1 - \text{factor}$ if too low, and increase it with $1 + \text{factor}$ if too high.

****base_sampler_kws** Keyword arguments passed to `AbstractSampler` init method. In particular, you may pass the `acceptation_history_length` hyperparameter.

Raises

`LeaspyInputError`

Attributes

In addition to the attributes present in [class:`AbstractSampler`:]

std [torch.FloatTensor] Adaptative std-dev of variable

Methods

<code>sample</code> (dataset, model, realizations, ...)	Sample new realization (either population or individual) for a given realization state, dataset, model and temperature
---	--

`sample`(dataset: Dataset, model: AbstractModel, realizations: CollectionRealization, temperature_inv: float, **attachment_computation_kws) → Tuple[torch.FloatTensor, torch.FloatTensor]

Sample new realization (either population or individual) for a given realization state, dataset, model and temperature

<!> Modifies in-place the realizations object, <!> as well as the model through its `update_MCMC_toolbox` for population variables.

Parameters

dataset [Dataset] Dataset class object build with leaspy class object Data, model & algo

model [AbstractModel] Model for loss computations and updates

realizations [*CollectionRealization*] Contain the current state & information of all the variables of interest

temperature_inv [float > 0] Inverse of the temperature used in tempered MCMC-SAEM

****attachment_computation_kws** Optional keyword arguments for attachment computations. As of now, we only use it for individual variables, and only *attribute_type*. It is used to know whether to compute attachments from the MCMC toolbox (esp. during fit) or to compute it from regular model parameters (esp. during personalization in mean/mode realization)

Returns

attachment, regularity_var [*torch.FloatTensor* 0D (population variable) or 1D (individual variable, with length *n_individuals*)] The attachment and regularity (only for the current variable) at the end of this sampling step (globally or per individual, depending on variable type).

3.4 leaspy.dataset: Datasets

Give access to some synthetic longitudinal observations mimicking cohort of subjects with neurodegenerative disorders, as well as calibrated models and computed individual parameters.

<i>Loader.Loader()</i>	Contains static methods to load synthetic longitudinal dataset, calibrated <i>Leaspy</i> instances & <i>IndividualParameters</i> .
------------------------	--

3.4.1 leaspy.datasets.loader.Loader

class Loader

Bases: *object*

Contains static methods to load synthetic longitudinal dataset, calibrated *Leaspy* instances & *IndividualParameters*.

Notes

- A *Leaspy* instance named *<name>* have been calibrated on the dataset *<name>*.
- An *IndividualParameters* name *<name>* have been computed by personalizing the *Leaspy* instance named *<name>* on the dataset *<name>*.

See the documentation of each method to get their respective available names.

Attributes

data_paths [dict [str, str]] Contains the datasets' names and their respective path within *leaspy.datasets* subpackage.

model_paths [dict [str, str]] Contains the *Leaspy* instances' names and their respective path within *leaspy.datasets* subpackage.

ip_paths [dict [str, str]] Contains the individual parameters' names and their respective path within *leaspy.datasets* subpackage.

Methods

<code>load_dataset(dataset_name)</code>	Load synthetic longitudinal observations mimicking cohort of subjects with neurodegenerative disorders.
<code>load_individual_parameters(ip_name)</code>	Load a Leaspy instance with a model already calibrated on the synthetic dataset corresponding to the name of the instance.
<code>load_leaspy_instance(instance_name)</code>	Load a Leaspy instance with a model already calibrated on the synthetic dataset corresponding to the name of the instance.

`static load_dataset(dataset_name)`

Load synthetic longitudinal observations mimicking cohort of subjects with neurodegenerative disorders.

Parameters

`dataset_name` [{‘parkinson-multivariate’, ‘alzheimer-multivariate’, ‘parkinson-putamen’, ‘parkinson-putamen-train_and_test’}] Name of the dataset.

Returns

`pandas.DataFrame` DataFrame containing the IDs, timepoints and observations.

Notes

All *DataFrames* have the same structures.

- Index: a `pandas.MultiIndex` - [‘ID’, ‘TIME’] which contain IDs and timepoints. The *DataFrame* is sorted by index. So, one line corresponds to one visit for one subject. The *DataFrame* having ‘train_and_test’ in their name also have ‘SPLIT’ as the third index level. It differentiate *train* and *test* data.
- Columns: One column correspond to one feature (or score).

`static load_individual_parameters(ip_name)`

Load a Leaspy instance with a model already calibrated on the synthetic dataset corresponding to the name of the instance.

Parameters

`ip_name` [{‘alzheimer-multivariate’, ‘parkinson-multivariate’, ‘parkinson-putamen-train’}] Name of the individual parameters.

Returns

`IndividualParameters` Leaspy instance with a model already calibrated.

`static load_leaspy_instance(instance_name)`

Load a Leaspy instance with a model already calibrated on the synthetic dataset corresponding to the name of the instance.

Parameters

`instance_name` [{‘alzheimer-multivariate’, ‘parkinson-multivariate’, ‘parkinson-putamen-train’}] Name of the instance.

Returns

`Leaspy` Leaspy instance with a model already calibrated.

3.5 leaspy.io: Inputs / Outputs

Containers classes used as input / outputs in the *Leaspy* package.

3.5.1 leaspy.io.data: Data containers

<code>data.Data()</code>	Main data container, initialized from a <i>csv file</i> or a <code>pandas.DataFrame</code> .
<code>dataset.Dataset(data[, model, algo])</code>	Data container based on <code>torch.Tensor</code> , used to run algorithms.

leaspy.io.data.data.Data

class Data
Bases: `object`

Main data container, initialized from a *csv file* or a `pandas.DataFrame`.

Methods

<code>from_csv_file(path, **kws)</code>	Create a <i>Data</i> object from a CSV file.
<code>from_dataframe(df, **kws)</code>	Create a <i>Data</i> object from a <code>pandas.DataFrame</code> .
<code>from_individuals(indices, timepoints, ...)</code>	Create a <i>Data</i> class object from lists of <i>ID</i> , <i>timepoints</i> and the corresponding <i>values</i> .
<code>get_by_idx(idx)</code>	Get the <i>IndividualData</i> of a an individual identified by its ID.
<code>load_cofactors(df, *[, cofactors])</code>	Load cofactors from a <code>pandas.DataFrame</code> to the <i>Data</i> object
<code>to_dataframe(*[, cofactors])</code>	Return the subjects' observations in a <code>pandas.DataFrame</code> along their ID and ages at all visits.

static from_csv_file(path: str, **kws)

Create a *Data* object from a CSV file.

Parameters

path [str] Path to the CSV file to load (with extension)

****kws** Keyword arguments that are sent to `CSVDataReader`

Returns

`Data`

static from_dataframe(df: DataFrame, **kws)

Create a *Data* object from a `pandas.DataFrame`.

Parameters

df [`pandas.DataFrame`] Dataframe containing ID, TIME and features.

****kws** Keyword arguments that are sent to `DataframeDataReader`

Returns

Data

static from_individuals(*indices*: *List[str]*, *timepoints*: *List[List]*, *values*: *List[List]*, *headers*: *List[str]*)
Create a *Data* class object from lists of *ID*, *timepoints* and the corresponding *values*.

Parameters

indices [*list[str]*] Contains the individuals' ID.

timepoints [*list[array-like 1D]*] For each individual *i*, list of ages at visits. Number of timepoints is referred below as *n_timepoints_i*

values [*list[array-like 2D]*] For each individual *i*, all values at visits. Shape is (*n_timepoints_i*, *n_features*).

headers [*list[str]*] Contains the features' names.

Returns

Data Data class object with all ID, timepoints, values and features' names.

get_by_idx(*idx*: *str*)

Get the *IndividualData* of a an individual identified by its ID.

Parameters

idx [*IDType*] The identifier of the patient you want to get the individual data.

Returns

IndividualData

load_cofactors(*df*: *DataFrame*, *, *cofactors*: *Optional[List[str]]* = *None*)

Load cofactors from a *pandas.DataFrame* to the *Data* object

Parameters

df [*pandas.DataFrame*] The dataframe where the cofactors are stored. Its index should be ID, the identifier of subjects and it should uniquely index the dataframe (i.e. one row per individual).

cofactors [*list[str]* or *None* (default)] Names of the column(s) of *df* which shall be loaded as cofactors. If *None*, all the columns from the input dataframe will be loaded as cofactors.

Raises

LeaspyDataInputError

to_dataframe(*, *cofactors*=*None*)

Return the subjects' observations in a *pandas.DataFrame* along their ID and ages at all visits.

Parameters

cofactors [*list[str]*, 'all', or *None* (default *None*)] Contains the cofactors' names to be included in the DataFrame. If *None* (default), no cofactors are returned. If "all", all the available cofactors are returned.

Returns

pandas.DataFrame Contains the subjects' ID, age and scores (optional - and cofactors) for each timepoint.

Raises

LeaspyDataInputError

leaspy.io.data.dataset.Dataset

class Dataset(*data*: Data, *model*: AbstractModel = None, *algo*: AbstractAlgo = None)
Bases: object

Data container based on `torch.Tensor`, used to run algorithms.

Parameters

data [Data] Create *Dataset* from *Data* object

model [AbstractModel] (optional) If not None, will check compatibility of model and data

algo [AbstractAlgo] (optional) If not None, will check compatibility of algo and data

Raises

LeaspyInputError if data, model or algo are not compatible together.

Attributes

headers [list[str]] Features names

dimension [int] Number of features

n_individuals [int] Number of individuals

indices [list[ID]] Order of patients

n_visits_per_individual [list[int]] Number of visits per individual

n_visits_max [int] Maximum number of visits for one individual

n_visits [int] Total number of visits

n_observations_per_ind_per_ft [torch.LongTensor, shape (n_individuals, dimension)]
Number of observations (not taking into account missing values) per individual per feature

n_observations_per_ft [torch.LongTensor, shape (dimension,)] Total number of observations per feature

n_observations [int] Total number of observations

timepoints [torch.FloatTensor, shape (n_individuals, n_visits_max)] Ages of patients at their different visits

values [torch.FloatTensor, shape (n_individuals, n_visits_max, dimension)] Values of patients for each visit for each feature

mask [torch.FloatTensor, shape (n_individuals, n_visits_max, dimension)] Binary mask associated to values. If 1: value is meaningful If 0: value is meaningless (either was nan or does not correspond to a real visit - only here for padding)

L2_norm_per_ft [torch.FloatTensor, shape (dimension,)] Sum of all non-nan squared values, feature per feature

L2_norm [scalar torch.FloatTensor] Sum of all non-nan squared values

Methods

<code>get_times_patient(i)</code>	Get ages for patient number <code>i</code>
<code>get_values_patient(i)</code>	Get values for patient number <code>i</code> , with nans.
<code>move_to_device(device)</code>	Moves the dataset to the specified device.
<code>to_pandas()</code>	Convert dataset to a <i>DataFrame</i> .

`get_times_patient(i: int) → torch.FloatTensor`
Get ages for patient number `i`

Parameters

`i` [int] The index of the patient (<!> not its identifier)

Returns

`torch.Tensor, shape (n_obs_of_patient,)` Contains float

`get_values_patient(i: int) → torch.FloatTensor`
Get values for patient number `i`, with nans.

Parameters

`i` [int] The index of the patient (<!> not its identifier)

Returns

`torch.Tensor, shape (n_obs_of_patient, dimension)` Contains float or nans

`move_to_device(device: torch.device) → None`
Moves the dataset to the specified device.

Parameters

`device` [torch.device]

`to_pandas() → DataFrame`
Convert dataset to a *DataFrame*.

Returns

`pandas.DataFrame`

class Data

Main data container, initialized from a *csv file* or a `pandas.DataFrame`.

Methods

<code>from_csv_file(path, **kws)</code>	Create a <i>Data</i> object from a CSV file.
<code>from_dataframe(df, **kws)</code>	Create a <i>Data</i> object from a <code>pandas.DataFrame</code> .
<code>from_individuals(indices, timepoints, ...)</code>	Create a <i>Data</i> class object from lists of <code>ID</code> , <code>timepoints</code> and the corresponding <code>values</code> .
<code>get_by_idx(idx)</code>	Get the <code>IndividualData</code> of a an individual identified by its ID.
<code>load_cofactors(df, *[, cofactors])</code>	Load cofactors from a <code>pandas.DataFrame</code> to the <i>Data</i> object
<code>to_dataframe(*[, cofactors])</code>	Return the subjects' observations in a <code>pandas.DataFrame</code> along their ID and ages at all visits.

3.5.2 `leaspy.io.settings`: Settings classes

<code>model_settings.ModelSettings(...)</code>	Used in <code>Leaspy.load()</code> to create a <code>Leaspy</code> class object from a <code>json</code> file.
<code>algorithm_settings.AlgorithmSettings(name, ...)</code>	Used to set the algorithms' settings.
<code>outputs_settings.OutputsSettings(settings)</code>	Used to create the <code>logs</code> folder to monitor the convergence of the calibration algorithm.

`leaspy.io.settings.model_settings.ModelSettings`

`class ModelSettings(path_to_model_settings_or_dict: Union[str, dict])`
Bases: `object`

Used in `Leaspy.load()` to create a `Leaspy` class object from a `json` file.

Parameters

`path_to_model_settings_or_dict` [dict or str]

- If a str: path to a json file containing model settings
- If a dict: content of model settings

Raises

`LeaspyModelError`

`leaspy.io.settings.algorithm_settings.AlgorithmSettings`

`class AlgorithmSettings(name: str, **kwargs)`
Bases: `object`

Used to set the algorithms' settings.

All parameters, except the choice of the algorithm, is set by default. The user can overwrite all default settings.

Parameters

`name` [str]

The algorithm's name. Must be in:

- For *fit* algorithms:
 - 'mcmc_saem'
 - 'lme_fit' (for LME model only)
- For *personalize* algorithms:
 - 'scipy_minimize'
 - 'mean_real'
 - 'mode_real'
 - 'constant_prediction' (for constant model only)
 - 'lme_personalize' (for LME model only)
- For *simulate* algorithms:
 - 'simulation'

`**kwargs` [any]

Depending on the algorithm you are setting up, various parameters are possible (not exhaustive):

- **seed** [int, optional, default None] Used for stochastic algorithms.
- **model_initialization_method** [str, optional] For `fit` algorithms only, give a model initialization method, according to those possible in `initialize_parameters()`.
- **algo_initialization_method** [str, optional] Personalize the algorithm initialization method, according to those possible for the given algorithm (refer to its documentation in `leaspy.algo`).
- **n_iter** [int, optional] Number of iteration. There is no stopping criteria for the all the MCMC SAEM algorithms.
- **n_burn_in_iter** [int, optional] Number of iteration during burning phase, used for the MCMC SAEM algorithms.
- **use_jacobian** [bool, optional, default True] Used in `scipy_minimize` algorithm to perform a *L-BFGS* instead of a *Powell* algorithm.
- **n_jobs** [int, optional, default 1] Used in `scipy_minimize` algorithm to accelerate calculation with parallel derivation using joblib.
- **progress_bar** [bool, optional, default True] Used to display a progress bar during computation.
- **device: str or torch.device, optional** Specifies on which device the algorithm will run. Only ‘cpu’ and ‘cuda’ are supported for this argument. Only ‘mcmc_saem’, ‘mean_real’ and ‘mode_real’ algorithms support this setting.

For the complete list of the available parameters for a given algorithm, please directly refer to its documentation.

Raises

`LeaspyAlgoInputError`

See also:

`leaspy.algo`

Notes

For developers: use `_dynamic_default_parameters` to dynamically set some default parameters, depending on other parameters that were set, while these *dynamic* parameters were not set.

Example: you could want to set burn in iterations or annealing iterations as fractions of non-default number of iterations given.

Format:

```
{algo_name: [
    (functional_condition_to_trigger_dynamic_setting(kwargs),
    {
        nested_keys_of_dynamic_setting: dynamic_value(kwargs)
    })
]}
```

Attributes

name [str] The algorithm's name.

model_initialization_method [str, optional] For fit algorithms, give a model initialization method, according to those possible in `initialize_parameters()`.

algo_INITIALIZATION_METHOD [str, optional] Personalize the algorithm initialization method, according to those possible for the given algorithm (refer to its documentation in `leaspy.algo`).

seed [int, optional, default None] Used for stochastic algorithms.

parameters [dict] Contains the other parameters: `n_iter`, `n_burn_in_iter`, `use_jacobian`, `n_jobs` & `progress_bar`.

logs [`OutputsSettings`, optional] Used to create a `logs` file during a model calibration containing convergence information.

device [str (or `torch.device`), optional, default 'cpu'] Used to specify on which device the algorithm will run. This should either be: 'cpu' or 'cuda' and is only supported in specific algorithms (inheriting `AlgoWithDeviceMixin`). Note that specifying an indexed CUDA device (such as 'cuda:1') is not supported. In order to specify the precise cuda device index, one should use the `CUDA_VISIBLE_DEVICES` environment variable.

Methods

<code>check_consistency()</code>	Check internal consistency of algorithm settings and warn or raise a <code>LeaspyAlgoInputError</code> if not.
<code>load(path_to_algorithm_settings)</code>	Instantiate a <code>AlgorithmSettings</code> object a from json file.
<code>save(path, **kwargs)</code>	Save an <code>AlgorithmSettings</code> object in a json file.
<code>set_logs([path])</code>	Use this method to monitor the convergence of a model calibration.

`property algo_class`

Class of the algorithm derived from its name (shorthand).

`check_consistency() → None`

Check internal consistency of algorithm settings and warn or raise a `LeaspyAlgoInputError` if not.

`classmethod load(path_to_algorithm_settings: str)`

Instantiate a `AlgorithmSettings` object a from json file.

Parameters

`path_to_algorithm_settings` [str] Path of the json file.

Returns

`AlgorithmSettings` An instanced of `AlgorithmSettings` with specified parameters.

Raises

`LeaspyAlgoInputError` if anything is invalid in algo settings

Examples

```
>>> from leaspy import AlgorithmSettings
>>> leaspy_univariate = AlgorithmSettings.load('outputs/leaspy-univariate_
→model-settings.json')
```

`save(path: str, **kwargs)`

Save an AlgorithmSettings object in a json file.

TODO? save leaspy version as well for retro/future-compatibility issues?

Parameters

path [str] Path to store the AlgorithmSettings.

****kwargs** Keyword arguments for json.dump method. Default: dict(indent=2)

Examples

```
>>> from leaspy import AlgorithmSettings
>>> settings = AlgorithmSettings('scipy_minimize', seed=42)
>>> settings.save('outputs/scipy_minimize-settings.json')
```

`set_logs(path: Optional[str] = None, **kwargs)`

Use this method to monitor the convergence of a model calibration.

It create graphs and csv files of the values of the population parameters (fixed effects) during the calibration

Parameters

path [str, optional] The path of the folder to store the graphs and csv files. No data will be saved if it is None, as well as save_periodicity and plot_periodicity.

****kwargs**

- **console_print_periodicity: int, optional, default 100** Display logs in the console/terminal every N iterations.
- **save_periodicity: int, optional, default 50** Saves the values in csv files every N iterations.
- **plot_periodicity: int, optional, default 1000** Generates plots from saved values every N iterations. Note that:
 - it should be a multiple of save_periodicity
 - setting a too low value (frequent) we seriously slow down you calibration
- **overwrite_logs_folder: bool, optional, default False** Set it to True to overwrite the content of the folder in path.

Raises

LeaspyAlgoInputError If the folder given in path already exists and if overwrite_logs_folder is set to False.

Notes

By default, if the folder given in path already exists, the method will raise an error. To overwrite the content of the folder, set `overwrite_logs_folder` it to True.

`leaspy.io.settings.outputs_settings.OutputsSettings`

`class OutputsSettings(settings)`

Bases: `object`

Used to create the `logs` folder to monitor the convergence of the calibration algorithm.

Parameters

`settings` [dict[str, Any]]

Parameters of the object. It may be in:

- **path** [str or None] Where to store logs (relative or absolute path) If None, nothing will be saved (only console prints), unless `save_periodicity` is not None (default relative path ‘`./outputs/`’ will be used).
- **console_print_periodicity** [int >= 1 or None] Flag to log into console convergence data every N iterations If None, no console prints.
- **save_periodicity** [int >= 1 or None] Flag to save convergence data every N iterations If None, no data will be saved.
- **plot_periodicity** [int >= 1 or None] Flag to plot convergence data every N iterations If None, no plots will be saved. Note that you can not plot convergence data without saving data (and not more frequently than these saves!)
- **overwrite_logs_folder** [bool] Flag to remove all previous logs if existing (default False)

Raises

`LeaspyAlgoInputError`

`class AlgorithmSettings(name: str, **kwargs)`

Used to set the algorithms' settings.

All parameters, except the choice of the algorithm, is set by default. The user can overwrite all default settings.

Parameters

`name` [str]

The algorithm's name. Must be in:

- **For fit algorithms:**
 - ‘`mcmc_saem`’
 - ‘`lme_fit`’ (for LME model only)
- **For personalize algorithms:**
 - ‘`scipy_minimize`’
 - ‘`mean_real`’
 - ‘`mode_real`’
 - ‘`constant_prediction`’ (for constant model only)
 - ‘`lme_personalize`’ (for LME model only)

- For *simulate* algorithms:
 - 'simulation'
- **kwargs [any]

Depending on the algorithm you are setting up, various parameters are possible (not exhaustive):

- **seed** [int, optional, default None] Used for stochastic algorithms.
- **model_initialization_method** [str, optional] For **fit** algorithms only, give a model initialization method, according to those possible in *initialize_parameters()*.
- **algo_initialization_method** [str, optional] Personalize the algorithm initialization method, according to those possible for the given algorithm (refer to its documentation in `leaspy.algo`).
- **n_iter** [int, optional] Number of iteration. There is no stopping criteria for the all the MCMC SAEM algorithms.
- **n_burn_in_iter** [int, optional] Number of iteration during burning phase, used for the MCMC SAEM algorithms.
- **use_jacobian** [bool, optional, default True] Used in `scipy_minimize` algorithm to perform a *L-BFGS* instead of a *Powell* algorithm.
- **n_jobs** [int, optional, default 1] Used in `scipy_minimize` algorithm to accelerate calculation with parallel derivation using joblib.
- **progress_bar** [bool, optional, default True] Used to display a progress bar during computation.
- **device: str or torch.device, optional** Specifies on which device the algorithm will run. Only 'cpu' and 'cuda' are supported for this argument. Only '`mcmc_saem`', '`mean_real`' and '`mode_real`' algorithms support this setting.

For the complete list of the available parameters for a given algorithm, please directly refer to its documentation.

Raises

`LeaspyAlgoInputError`

See also:

`leaspy.algo`

Notes

For developers: use `_dynamic_default_parameters` to dynamically set some default parameters, depending on other parameters that were set, while these *dynamic* parameters were not set.

Example: you could want to set burn in iterations or annealing iterations as fractions of non-default number of iterations given.

Format:

```
{algo_name: [
    (functional_condition_to_trigger_dynamic_setting(kwargs),
    {
        nested_keys_of_dynamic_setting: dynamic_value(kwargs)
```

(continues on next page)

(continued from previous page)

```

    })
}

```

Attributes

name [str] The algorithm's name.

model_initialization_method [str, optional] For fit algorithms, give a model initialization method, according to those possible in `initialize_parameters()`.

algo_INITIALIZATION_METHOD [str, optional] Personalize the algorithm initialization method, according to those possible for the given algorithm (refer to its documentation in `leaspy.algo`).

seed [int, optional, default None] Used for stochastic algorithms.

parameters [dict] Contains the other parameters: `n_iter`, `n_burn_in_iter`, `use_jacobian`, `n_jobs` & `progress_bar`.

logs [*OutputsSettings*, optional] Used to create a `logs` file during a model calibration containing convergence information.

device [str (or `torch.device`), optional, default ‘cpu’] Used to specify on which device the algorithm will run. This should either be: ‘cpu’ or ‘cuda’ and is only supported in specific algorithms (inheriting `AlgoWithDeviceMixin`). Note that specifying an indexed CUDA device (such as ‘cuda:1’) is not supported. In order to specify the precise cuda device index, one should use the `CUDA_VISIBLE_DEVICES` environment variable.

Methods

<code>check_consistency()</code>	Check internal consistency of algorithm settings and warn or raise a <code>LeaspyAlgoInputError</code> if not.
<code>load(path_to_algorithm_settings)</code>	Instantiate a <code>AlgorithmSettings</code> object a from json file.
<code>save(path, **kwargs)</code>	Save an <code>AlgorithmSettings</code> object in a json file.
<code>set_logs([path])</code>	Use this method to monitor the convergence of a model calibration.

3.5.3 `leaspy.io.outputs`: Outputs classes

<code>individual_parameters.</code> <code>IndividualParameters()</code>	Data container for individual parameters, contains IDs, timepoints and observations values.
--	---

`leaspy.io.outputs.individual_parameters.IndividualParameters`

`class IndividualParameters`

Bases: `object`

Data container for individual parameters, contains IDs, timepoints and observations values. Output of the `Leaspy.personalize()` method, contains the *random effects*.

There are used as output of the *personalization algorithms* and as input/output of the *simulation algorithm*, to provide an initial distribution of individual parameters.

Attributes

- `_indices` [list] List of the patient indices
- `_individual_parameters` [dict] Individual indices (key) with their corresponding individual parameters {parameter name: parameter value}
- `_parameters_shape` [dict] Shape of each individual parameter
- `_default_saving_type` [str] Default extension for saving when none is provided

Methods

<code>add_individual_parameters(index, ...)</code>	Add the individual parameter of an individual to the IndividualParameters object
<code>from_dataframe(df)</code>	Static method that returns an IndividualParameters object from the dataframe
<code>from_pytorch(indices, dict_pytorch)</code>	Static method that returns an IndividualParameters object from the indices and pytorch dictionary
<code>get_aggregate(parameter, function)</code>	Returns the result of aggregation by <i>function</i> of parameter values across all patients
<code>get_mean(parameter)</code>	Returns the mean value of a parameter across all patients
<code>get_std(parameter)</code>	Returns the standard deviation of a parameter across all patients
<code>items()</code>	Get items of dict <code>_individual_parameters</code> .
<code>load(path)</code>	Static method that loads the individual parameters (json or csv) existing at the path location
<code>save(path, **kwargs)</code>	Saves the individual parameters (json or csv) at the path location
<code>subset(indices, *[, copy])</code>	Returns IndividualParameters object with a subset of the initial individuals
<code>to_dataframe()</code>	Returns the dataframe of individual parameters
<code>to_pytorch()</code>	Returns the indices and pytorch dictionary of individual parameters

`add_individual_parameters(index: str, individual_parameters: Dict[str, Any])`

Add the individual parameter of an individual to the IndividualParameters object

Parameters

- `index` [str] Index of the individual
- `individual_parameters` [dict] Individual parameters of the individual {name: value:}

Raises

LeaspyIndividualParamsInputError

- If the index is not a string or has already been added
- Or if the individual parameters is not a dict.
- Or if individual parameters are not self-consistent.

Examples

Add two individual with tau, xi and sources parameters

```
>>> ip = IndividualParameters()
>>> ip.add_individual_parameters('index-1', {"xi": 0.1, "tau": 70, "sources": 0.1, -0.3})
>>> ip.add_individual_parameters('index-2', {"xi": 0.2, "tau": 73, "sources": -0.4, -0.1})
```

static from_dataframe(df: DataFrame)

Static method that returns an IndividualParameters object from the dataframe

Parameters

df [pandas.DataFrame] Dataframe of the individual parameters. Each row must correspond to one individual. The index corresponds to the individual index. The columns are the names of the parameters.

Returns

IndividualParameters

static from_pytorch(indices: List[str], dict_pytorch: Dict[str, torch.FloatTensor])

Static method that returns an IndividualParameters object from the indices and pytorch dictionary

Parameters

indices [list[ID]] List of the patients indices

dict_pytorch [dict[parameter:str, torch.Tensor]] Dictionary of the individual parameters

Returns

IndividualParameters

Raises

LeaspyIndividualParamsInputError

Examples

```
>>> indices = ['index-1', 'index-2', 'index-3']
>>> ip_pytorch = {
>>>     "xi": torch.tensor([[0.1], [0.2], [0.3]]), dtype=torch.float32),
>>>     "tau": torch.tensor([[70], [73], [58.]]], dtype=torch.float32),
>>>     "sources": torch.tensor([[0.1, -0.3], [-0.4, 0.1], [-0.6, 0.2]]], dtype=torch.float32)
>>> }
>>> ip_pytorch = IndividualParameters.from_pytorch(indices, ip_pytorch)
```

get_aggregate(*parameter*: str, *function*: Callable) → List

Returns the result of aggregation by *function* of parameter values across all patients

Parameters

parameter [str] Name of the parameter

function [callable] A function operating on iterables and supporting axis keyword, and outputting an iterable supporting the *tolist* method.

Returns

list or float (depending on parameter shape) Resulting value of the parameter

Raises

LeaspyIndividualParamsInputError

- If individual parameters are empty,
- or if the parameter is not in the IndividualParameters.

Examples

```
>>> ip = IndividualParameters.load("path/to/individual_parameters")
>>> tau_median = ip.get_aggregate("tau", np.median)
```

get_mean(*parameter*: str)

Returns the mean value of a parameter across all patients

Parameters

parameter [str] Name of the parameter

Returns

list or float (depending on parameter shape) Mean value of the parameter

Raises

LeaspyIndividualParamsInputError

- If individual parameters are empty,
- or if the parameter is not in the IndividualParameters.

Examples

```
>>> ip = IndividualParameters.load("path/to/individual_parameters")
>>> tau_mean = ip.get_mean("tau")
```

get_std(*parameter*: str)

Returns the standard deviation of a parameter across all patients

Parameters

parameter [str] Name of the parameter

Returns

list or float (depending on parameter shape) Standard-deviation value of the parameter

Raises**LeaspyIndividualParamsInputError**

- If individual parameters are empty,
- or if the parameter is not in the IndividualParameters.

Examples

```
>>> ip = IndividualParameters.load("path/to/individual_parameters")
>>> tau_std = ip.get_std("tau")
```

items()

Get items of dict _individual_parameters.

classmethod load(path: str)

Static method that loads the individual parameters (json or csv) existing at the path location

Parameters

path [str] Path and file name of the individual parameters.

Returns

IndividualParameters Individual parameters object load from the file

Raises

LeaspyIndividualParamsInputError If the provided extension is not csv or not json.

Examples

```
>>> ip = IndividualParameters.load('/path/to/individual_parameters_1.json')
>>> ip2 = IndividualParameters.load('/path/to/individual_parameters_2.csv')
```

save(path: str, **kwargs)

Saves the individual parameters (json or csv) at the path location

TODO? save leaspy version as well for retro/future-compatibility issues?

Parameters

path [str] Path and file name of the individual parameters. The extension can be json or csv. If no extension, default extension (csv) is used

****kwargs** Additional keyword arguments to pass to either: * pandas.DataFrame.to_csv() * json.dump() depending on saving format requested

Raises**LeaspyIndividualParamsInputError**

- If extension not supported for saving
- If individual parameters are empty

subset(indices: Iterable[str], *, copy: bool = True)

Returns IndividualParameters object with a subset of the initial individuals

Parameters

indices [list[ID]] List of strings that corresponds to the indices of the individuals to return

copy [bool, optional (default True)] Should we copy underlying parameters or not?

Returns

IndividualParameters An instance of the IndividualParameters object with the selected list of individuals

Raises

LeaspyIndividualParamsInputError Raise an error if one of the index is not in the IndividualParameters

Examples

```
>>> ip = IndividualParameters()
>>> ip.add_individual_parameters('index-1', {"xi": 0.1, "tau": 70, "sources": [-0.1, -0.3]})
>>> ip.add_individual_parameters('index-2', {"xi": 0.2, "tau": 73, "sources": [-0.4, -0.1]})
>>> ip.add_individual_parameters('index-3', {"xi": 0.3, "tau": 58, "sources": [-0.6, 0.2]})
>>> ip_sub = ip.subset(['index-1', 'index-3'])
```

to_dataframe() → DataFrame

Returns the dataframe of individual parameters

Returns

pandas.DataFrame Each row corresponds to one individual. The index corresponds to the individual index ('ID'). The columns are the names of the parameters.

Examples

Convert the individual parameters object into a dataframe

```
>>> ip = IndividualParameters.load("path/to/individual_parameters")
>>> ip_df = ip.to_dataframe()
```

to_pytorch() → Tuple[List[str], Dict[str, torch.FloatTensor]]

Returns the indices and pytorch dictionary of individual parameters

Returns

indices: list[ID] List of patient indices

pytorch_dict: dict[parameter:str, torch.Tensor] Dictionary of the individual parameters {parameter name: pytorch tensor of values across individuals}

Examples

Convert the individual parameters object into a dataframe

```
>>> ip = IndividualParameters.load("path/to/individual_parameters")
>>> indices, ip_pytorch = ip.to_pytorch()
```

3.5.4 leaspy.io.realizations: Realizations classes

Internal classes used for random variables in MCMC algorithms.

<code>realization.Realization(name, shape, ...)</code>	Contains the realization of a given parameter.
<code>collection_realization.</code>	Realizations of population and individual parameters.
<code>CollectionRealization()</code>	

leaspy.io.realizations.realization.Realization

```
class Realization(name: str, shape: Tuple[int, ...], variable_type: str)
Bases: object
```

Contains the realization of a given parameter.

Parameters

- `name` [str] Variable name
- `shape` [tuple of int] Shape of variable (multiple dimensions allowed)
- `variable_type` [str] 'individual' or 'population' variable?

Attributes

- `name` [str] Variable name
- `shape` [tuple of int] Shape of variable (multiple dimensions allowed)
- `variable_type` [str] 'individual' or 'population' variable?
- `tensor_realizations` [torch.Tensor] Actual realizations, whose shape is given by `shape`

Methods

<code>from_tensor(name, shape, variable_type, ...)</code>	Create realization from variable infos and torch tensor object
<code>initialize(n_individuals, model, *[...,])</code>	Initialize realization from a given model.
<code>set_autograd()</code>	Set autograd for tensor of realizations
<code>set_tensor_realizations_element(element, dim)</code>	Manually change the value (in-place) of <code>tensor_realizations</code> at dimension <code>dim</code> .
<code>unset_autograd()</code>	Unset autograd for tensor of realizations

```
classmethod from_tensor(name: str, shape: Tuple[int, ...], variable_type: str, tensor_realization: torch.FloatTensor)
```

Create realization from variable infos and torch tensor object

Parameters

name [str] Variable name
shape [tuple of int] Shape of variable (multiple dimensions allowed)
variable_type [str] 'individual' or 'population' variable?
tensor_realization [torch.Tensor] Actual realizations, whose shape is given by
shape

Returns**Realization**

initialize(*n_individuals*: int, *model*: AbstractModel, *, *individual_variable_init_at_mean*: bool = False)
Initialize realization from a given model.

Parameters

n_individuals [int > 0] Number of individuals

model [AbstractModel] The model you want realizations for.

individual_variable_init_at_mean [bool (default False)] If True: individual variable will be initialized at its mean (from model parameters) Otherwise: individual variable will be a random draw from a Gaussian distribution with loc and scale parameter from model parameters.

Raises

LeaspyModelError if unknown variable type

set_autograd()

Set autograd for tensor of realizations

TODO remove? only in legacy code

Raises

ValueError if inconsistent internal request

See also:

[torch.Tensor.requires_grad_](#)

set_tensor_realizations_element(*element*: torch.FloatTensor, *dim*: tuple[int, ...])
Manually change the value (in-place) of *tensor_realizations* at dimension *dim*.

unset_autograd()

Unset autograd for tensor of realizations

TODO remove? only in legacy code

Raises

ValueError if inconsistent internal request

See also:

[torch.Tensor.requires_grad_](#)

leaspy.io.realizations.collection_realization.CollectionRealization**class CollectionRealization**Bases: `object`

Realizations of population and individual parameters.

Methods

<code>clone_realizations()</code>	Deep-copy of self instance.
<code>initialize(n_individuals, model, *[...,])</code>	Initialize the Collection Realization with a model.
<code>items()</code>	Return all pairs of variable name / realization object.
<code>keys()</code>	Return all variable names.
<code>values()</code>	Return all realization objects.

`clone_realizations()` → *CollectionRealization*

Deep-copy of self instance.

In particular the underlying realizations are cloned and detached.

Returns***CollectionRealization*****`initialize(n_individuals: int, model: AbstractModel, *, skip_variable: Callable[[dict], bool] = None, **realization_init_kws)`**

Initialize the Collection Realization with a model.

Parameters**n_individuals** [int] Number of individuals modelled**model** [*AbstractModel*] Model we initialize from**skip_variable** [None or function info_variable: dict → to_skip: bool] An optional function used to skip some of the model variables. e.g. `lambda info_var: info_var['type'] == 'population'` will enable to skip all population variables.****realization_init_kws** Additional keyword arguments passed to `Realization.initialize()`.**`items()`**

Return all pairs of variable name / realization object.

`keys()`

Return all variable names.


`values()`

Return all realization objects.

3.6 `leaspy.exceptions: Exceptions`

Define custom Leaspy exceptions for better downstream handling.

Exceptions classes are nested so to handle in the most convenient way for users:

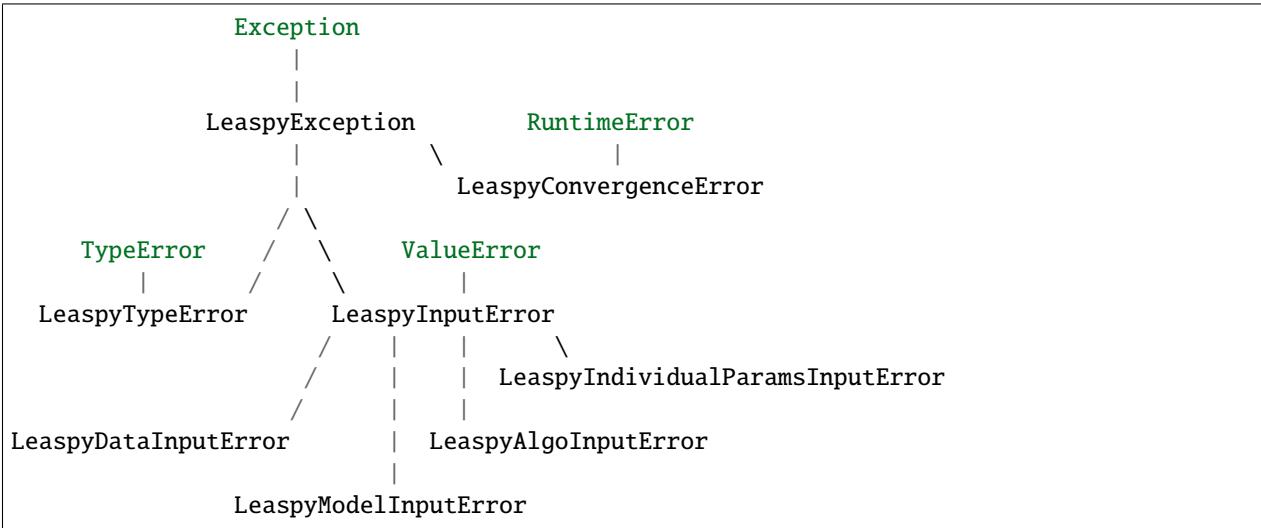

For I/O operations, non-Leaspy specific errors may be raised, in particular:

- `FileNotFoundException`
- `NotADirectoryError`

<code>LeaspyException</code>	Base of all Leaspy exceptions.
<code>LeaspyTypeError</code>	Leaspy Exception, deriving from <code>TypeError</code> .
<code>LeaspyInputError</code>	Leaspy Exception, deriving from <code>ValueError</code> .
<code>LeaspyDataInputError</code>	Leaspy Input Error for data related issues.
<code>LeaspyModelError</code>	Leaspy Input Error for model related issues.
<code>LeaspyAlgoInputError</code>	Leaspy Input Error for algorithm related issues.
<code>LeaspyIndividualParamsInputError</code>	Leaspy Input Error for individual parameters related issues.
<code>LeaspyConvergenceError</code>	Leaspy Exception for errors relative to convergence.

3.6.1 `leaspy.exceptions.LeaspyException`

`exception LeaspyException`

Bases: `Exception`

Base of all Leaspy exceptions.

3.6.2 `leaspy.exceptions.LeaspyTypeError`

```
exception LeaspyTypeError
    Bases: leaspy.exceptions.LeaspyException, TypeError
    Leaspy Exception, deriving from TypeError.
```

3.6.3 `leaspy.exceptions.LeaspyInputError`

```
exception LeaspyInputError
    Bases: leaspy.exceptions.LeaspyException, ValueError
    Leaspy Exception, deriving from ValueError.
```

3.6.4 `leaspy.exceptions.LeaspyDataInputError`

```
exception LeaspyDataInputError
    Bases: leaspy.exceptions.LeaspyInputError
    Leaspy Input Error for data related issues.
```

3.6.5 `leaspy.exceptions.LeaspyModelInputError`

```
exception LeaspyModelInputError
    Bases: leaspy.exceptions.LeaspyInputError
    Leaspy Input Error for model related issues.
```

3.6.6 `leaspy.exceptions.LeaspyAlgoInputError`

```
exception LeaspyAlgoInputError
    Bases: leaspy.exceptions.LeaspyInputError
    Leaspy Input Error for algorithm related issues.
```

3.6.7 `leaspy.exceptions.LeaspyIndividualParamsInputError`

```
exception LeaspyIndividualParamsInputError
    Bases: leaspy.exceptions.LeaspyInputError
    Leaspy Input Error for individual parameters related issues.
```

3.6.8 `leaspy.exceptions.LeaspyConvergenceError`

`exception LeaspyConvergenceError`

Bases: `leaspy.exceptions.LeaspyException, RuntimeError`

Leaspy Exception for errors relative to convergence.

CHAPTER
FOUR

USER GUIDE

TODO

4.1 Mathematical aspects

4.1.1 Introduction

TODO

4.1.2 Mathematical formulation

TODO

4.1.3 Riemanian framework

TODO

4.1.4 Missing data

TODO

4.2 Leaspy's tutorial

4.2.1 What do I need?

TODO

4.2.2 Derive the population parameters

TODO

4.2.3 Derive the individual parameters

TODO

4.2.4 Cofactor analysis

TODO

4.2.5 What about missing values?

TODO

4.2.6 Predictions

TODO

4.2.7 Simulations

TODO

CHAPTER


FIVE

INDEX

LEARNING SPATIOTEMPORAL PATTERNS IN PYTHON

6.1 Description

Leaspy is a software package for the statistical analysis of **longitudinal data**, particularly **medical** data that comes in a form of **repeated observations** of patients at different time-points.

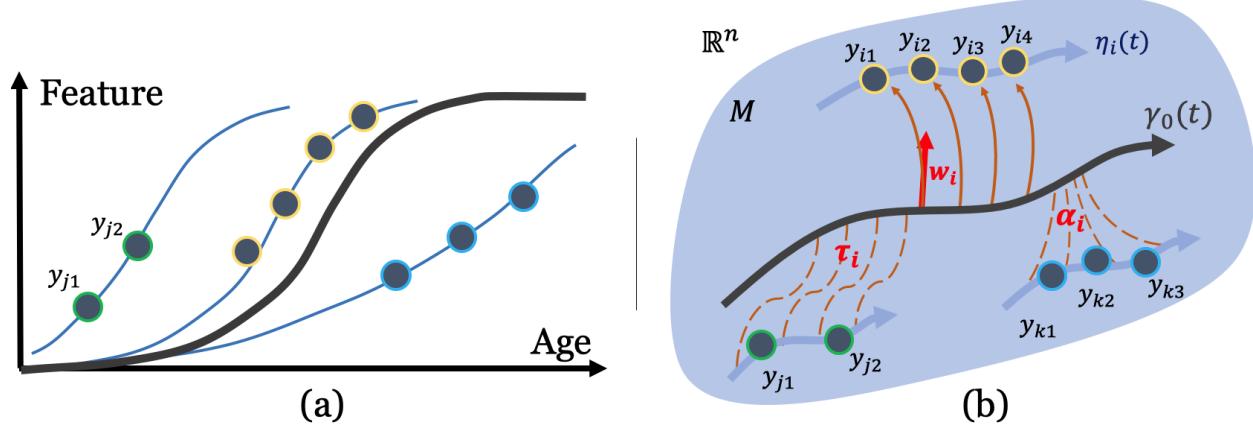

Considering these series of short-term data, the software aims at :

- Recombining them to reconstruct the long-term spatio-temporal trajectory of evolution
- Positioning each patient observations relatively to the group-average timeline, in term of both temporal differences (time shift and acceleration factor) and spatial differences (different sequences of events, spatial pattern of progression, ...)
- Quantifying impact of cofactors (gender, genetic mutation, environmental factors, ...) on the evolution of the signal
- Imputing missing values
- Predicting future observations
- Simulating virtual patients to un-bias the initial cohort or mimic its characteristics

The software package can be used with scalar multivariate data whose progression can be modelled by a logistic shape, an exponential decay or a linear progression. The simplest type of data handled by the software are scalar data: they

correspond to one (univariate) or multiple (multivariate) measurement(s) per patient observation. This includes, for instance, clinical scores, cognitive assessments, physiological measurements (e.g. blood markers, radioactive markers) but also imaging-derived data that are rescaled, for instance, between 0 and 1 to describe a logistic progression.

6.2 Getting started

Information to install, test, and contribute to the package.

6.3 API Documentation

The exact API of all functions and classes, as given in the docstrings. The API documents expected types and allowed features for all functions, and all parameters available for the algorithms.

6.4 User Guide

The main documentation. This contains an in-depth description of all algorithms and how to apply them.

6.5 License

The package is distributed under the BSD 3-Clause license.

6.6 Further information

More detailed explanations about the models themselves and about the estimation procedure can be found in the following articles :

- **Mathematical framework:** *A Bayesian mixed-effects model to learn trajectories of changes from repeated manifold-valued observations.* Jean-Baptiste Schiratti, Stéphanie Allassonnière, Olivier Colliot, and Stanley Durrleman. The Journal of Machine Learning Research, 18:1–33, December 2017. [Open Access](#)
- **Application to imaging data:** *Statistical learning of spatiotemporal patterns from longitudinal manifold-valued networks.* I. Koval, J.-B. Schiratti, A. Routier, M. Bacci, O. Colliot, S. Allassonnière and S. Durrleman. MICCAI, September 2017. [Open Access](#)
- **Application to imaging data:** *Spatiotemporal Propagation of the Cortical Atrophy: Population and Individual Patterns.* Igor Koval, Jean-Baptiste Schiratti, Alexandre Routier, Michael Bacci, Olivier Colliot, Stéphanie Allassonnière, and Stanley Durrleman. Front Neurol. 2018 May 4;9:235. [Open Access](#)
- **Application to data with missing values:** *Learning disease progression models with longitudinal data and missing values.* R. Couronne, M. Vidailhet, JC. Corvol, S. Lehéricy, S. Durrleman. ISBI, April 2019. [Open Access](#)
- **Intensive application for Alzheimer’s Disease progression:** *AD Course Map charts Alzheimer’s disease progression,* I. Koval, A. Bone, M. Louis, S. Bottani, A. Marcoux, J. Samper-Gonzalez, N. Burgos, B. Charlier, A. Bertrand, S. Epelbaum, O. Colliot, S. Allassonnière & S. Durrleman, Scientific Reports, 2021. 11(1):1-16 [Open Access](#)
- www.digital-brain.org : Website related to the application of the model for Alzheimer’s disease.

- Disease Course Mapping webpage by Igor Koval

INDEX

A

`AbstractAlgo` (*class in leaspy.algo.abstract_algo*), 76
`AbstractAttributes` (*class in leaspy.models.utils.attributes.abstract_attributes*), 67
`AbstractFitAlgo` (*class in leaspy.algo.fit.abstract_fit_algo*), 80
`AbstractFitMCMC` (*class in leaspy.algo.fit.abstract_mcmc*), 83
`AbstractManifoldModelAttributes` (*class in leaspy.models.utils.attributes.abstract_manifold_model_attributes*), 68
`AbstractModel` (*class in leaspy.models.abstract_model*), 19
`AbstractMultivariateModel` (*class in leaspy.models.abstract_multivariate_model*), 36
`AbstractPersonalizeAlgo` (*class in leaspy.algo.personalize.abstract_personalize_algo*), 89
`AbstractSampler` (*class in leaspy.algo.utils.samplers.abstract_sampler*), 107
`add_individual_parameters()` (*IndividualParameters method*), 123
`algo()` (*AlgoFactory class method*), 79
`algo_class` (*AlgorithmSettings property*), 118
`AlgoFactory` (*class in leaspy.algo.algo_factory*), 79
`AlgorithmSettings` (*class in leaspy.io.settings.algorithm_settings*), 116
`attributes()` (*AttributesFactory class method*), 67
`AttributesFactory` (*class in leaspy.models.utils.attributes.attributes_factory*), 67

C

`calibrate()` (*Leaspy method*), 10
`check_consistency()` (*AlgorithmSettings method*), 118
`check_if_initialized()` (*Leaspy method*), 10
`clone_realizations()` (*CollectionRealization method*), 130

`CollectionRealization` (*class in leaspy.io.realizations.collection_realization*), 130
`compute_individual_ages_from_biomarker_values()` (*AbstractModel method*), 21
`compute_individual_ages_from_biomarker_values()` (*AbstractMultivariateModel method*), 37
`compute_individual_ages_from_biomarker_values()` (*MultivariateModel method*), 45
`compute_individual_ages_from_biomarker_values()` (*MultivariateParallelModel method*), 54
`compute_individual_ages_from_biomarker_values()` (*UnivariateModel method*), 28
`compute_individual_ages_from_biomarker_values_tensorized()` (*AbstractModel method*), 21
`compute_individual_ages_from_biomarker_values_tensorized()` (*AbstractMultivariateModel method*), 38
`compute_individual_ages_from_biomarker_values_tensorized()` (*MultivariateModel method*), 46
`compute_individual_ages_from_biomarker_values_tensorized()` (*MultivariateParallelModel method*), 55
`compute_individual_ages_from_biomarker_values_tensorized()` (*UnivariateModel method*), 28
`compute_individual_ages_from_biomarker_values_tensorized_1()` (*MultivariateModel method*), 46
`compute_individual_ages_from_biomarker_values_tensorized_1()` (*UnivariateModel method*), 29
`compute_individual_attachment_tensorized()` (*AbstractModel method*), 21
`compute_individual_attachment_tensorized()` (*AbstractMultivariateModel method*), 38
`compute_individual_attachment_tensorized()` (*MultivariateModel method*), 46
`compute_individual_attachment_tensorized()` (*MultivariateParallelModel method*), 55
`compute_individual_attachment_tensorized()` (*UnivariateModel method*), 29
`compute_individual_tensorized()` (*AbstractModel method*), 22
`compute_individual_tensorized()` (*AbstractMultivariateModel method*), 38
`compute_individual_tensorized()` (*MultivariateModel method*), 46

Model method), 46

`compute_individual_tensorized()` (*MultivariateParallelModel method*), 55

`compute_individual_tensorized()` (*UnivariateModel method*), 29

`compute_individual_tensorized_linear()` (*MultivariateModel method*), 47

`compute_individual_tensorized_linear()` (*UnivariateModel method*), 30

`compute_individual_tensorized_logistic()` (*MultivariateModel method*), 47

`compute_individual_tensorized_logistic()` (*UnivariateModel method*), 30

`compute_individual_trajectory()` (*AbstractModel method*), 22

`compute_individual_trajectory()` (*AbstractMultivariateModel method*), 39

`compute_individual_trajectory()` (*ConstantModel method*), 65

`compute_individual_trajectory()` (*LMEModel method*), 62

`compute_individual_trajectory()` (*MultivariateModel method*), 47

`compute_individual_trajectory()` (*MultivariateParallelModel method*), 55

`compute_individual_trajectory()` (*UnivariateModel method*), 30

`compute_jacobian_tensorized()` (*AbstractModel method*), 22

`compute_jacobian_tensorized()` (*AbstractMultivariateModel method*), 39

`compute_jacobian_tensorized()` (*MultivariateModel method*), 48

`compute_jacobian_tensorized()` (*MultivariateParallelModel method*), 56

`compute_jacobian_tensorized()` (*UnivariateModel method*), 31

`compute_jacobian_tensorized_linear()` (*MultivariateModel method*), 48

`compute_jacobian_tensorized_linear()` (*UnivariateModel method*), 31

`compute_jacobian_tensorized_logistic()` (*MultivariateModel method*), 48

`compute_jacobian_tensorized_logistic()` (*UnivariateModel method*), 31

`compute_mean_traj()` (*AbstractMultivariateModel method*), 39

`compute_mean_traj()` (*MultivariateModel method*), 49

`compute_mean_traj()` (*MultivariateParallelModel method*), 56

`compute_mean_traj()` (*UnivariateModel method*), 32

`compute_regularity_realization()` (*AbstractModel method*), 23

`compute_regularity_realization()` (*MultivariateModel method*), 40

`compute_regularity_realization()` (*MultivariateParallelModel method*), 49

`compute_regularity_realization()` (*MultivariateParallelModel method*), 56

`compute_regularity_realization()` (*UnivariateModel method*), 32

`compute_regularity_variable()` (*AbstractModel method*), 23

`compute_regularity_variable()` (*AbstractMultivariateModel method*), 40

`compute_regularity_variable()` (*MultivariateModel method*), 49

`compute_regularity_variable()` (*MultivariateParallelModel method*), 57

`compute_regularity_variable()` (*UnivariateModel method*), 32

`compute_sufficient_statistics()` (*AbstractModel method*), 23

`compute_sufficient_statistics()` (*AbstractMultivariateModel method*), 40

`compute_sufficient_statistics()` (*MultivariateModel method*), 49

`compute_sufficient_statistics()` (*MultivariateParallelModel method*), 57

`compute_sufficient_statistics()` (*UnivariateModel method*), 32

`compute_sum_squared_per_ft_tensorized()` (*AbstractModel method*), 23

`compute_sum_squared_per_ft_tensorized()` (*AbstractMultivariateModel method*), 40

`compute_sum_squared_per_ft_tensorized()` (*MultivariateModel method*), 50

`compute_sum_squared_per_ft_tensorized()` (*MultivariateParallelModel method*), 57

`compute_sum_squared_per_ft_tensorized()` (*UnivariateModel method*), 33

`compute_sum_squared_tensorized()` (*AbstractModel method*), 24

`compute_sum_squared_tensorized()` (*AbstractMultivariateModel method*), 40

`compute_sum_squared_tensorized()` (*MultivariateModel method*), 50

`compute_sum_squared_tensorized()` (*MultivariateParallelModel method*), 57

`compute_sum_squared_tensorized()` (*UnivariateModel method*), 33

`ConstantModel` (class in `leaspy.models.constant_model`), 64

`ConstantPredictionAlgorithm` (class in `leaspy.algo.others.constant_prediction_algo`), 100

D

`Data` (*class in leaspy.io.data.data*), 112
`Dataset` (*class in leaspy.io.data.dataset*), 114

E

`estimate()` (*Leaspy method*), 11
`estimate_ages_from_biomarker_values()` (*Leaspy method*), 11

F

`fit()` (*Leaspy method*), 12
`from_csv_file()` (*Data static method*), 112
`from_dataframe()` (*Data static method*), 112
`from_dataframe()` (*IndividualParameters static method*), 124
`from_individuals()` (*Data static method*), 113
`from_pytorch()` (*IndividualParameters static method*), 124
`from_tensor()` (*Realization class method*), 128

G

`get_aggregate()` (*IndividualParameters method*), 124
`get_attributes()` (*AbstractAttributes method*), 68
`get_attributes()` (*AbstractManifoldModelAttributes method*), 69
`get_attributes()` (*LinearAttributes method*), 71
`get_attributes()` (*LogisticAttributes method*), 73
`get_attributes()` (*LogisticParallelAttributes method*), 75
`get_by_idx()` (*Data method*), 113
`get_class()` (*AlgoFactory class method*), 80
`get_hyperparameters()` (*ConstantModel method*), 65
`get_hyperparameters()` (*LMEModel method*), 62
`get_individual_realization_names()` (*AbstractModel method*), 24
`get_individual_realization_names()` (*AbstractMultivariateModel method*), 41
`get_individual_realization_names()` (*MultivariateModel method*), 50
`get_individual_realization_names()` (*MultivariateParallelModel method*), 58
`get_individual_realization_names()` (*UnivariateModel method*), 33
`get_mean()` (*IndividualParameters method*), 125
`get_param_from_real()` (*AbstractModel method*), 24
`get_param_from_real()` (*AbstractMultivariateModel method*), 41
`get_param_from_real()` (*MultivariateModel method*), 50
`get_param_from_real()` (*MultivariateParallelModel method*), 58
`get_param_from_real()` (*UnivariateModel method*), 33

`get_population_realization_names()` (*AbstractModel method*), 24
`get_population_realization_names()` (*AbstractMultivariateModel method*), 41
`get_population_realization_names()` (*MultivariateModel method*), 50
`get_population_realization_names()` (*MultivariateParallelModel method*), 58
`get_population_realization_names()` (*UnivariateModel method*), 33
`get_std()` (*IndividualParameters method*), 125
`get_times_patient()` (*Dataset method*), 115
`get_values_patient()` (*Dataset method*), 115
`GibbsSampler` (*class in leaspy.algo.utils.samplers.gibbs_sampler*), 108

H

`hyperparameters_ok()` (*ConstantModel method*), 65
`hyperparameters_ok()` (*LMEModel method*), 62

I

`IndividualParameters` (*class in leaspy.io.outputs.individual_parameters*), 123
`initialize()` (*AbstractModel method*), 24
`initialize()` (*AbstractMultivariateModel method*), 41
`initialize()` (*CollectionRealization method*), 130
`initialize()` (*ConstantModel method*), 65
`initialize()` (*LMEModel method*), 62
`initialize()` (*MultivariateModel method*), 51
`initialize()` (*MultivariateParallelModel method*), 58
`initialize()` (*Realization method*), 129
`initialize()` (*UnivariateModel method*), 34
`initialize_MCMC_toolbox()` (*AbstractMultivariateModel method*), 41
`initialize_MCMC_toolbox()` (*MultivariateModel method*), 51
`initialize_MCMC_toolbox()` (*MultivariateParallelModel method*), 58
`initialize_MCMC_toolbox()` (*UnivariateModel method*), 34
`initialize_parameters()` (*in module leaspy.models.utils.initialization.model_initialization*), 76
`initialize_realizations_for_model()` (*AbstractModel method*), 25
`initialize_realizations_for_model()` (*AbstractMultivariateModel method*), 41
`initialize_realizations_for_model()` (*MultivariateModel method*), 51
`initialize_realizations_for_model()` (*MultivariateParallelModel method*), 58
`initialize_realizations_for_model()` (*UnivariateModel method*), 34

<code>is_jacobian_implemented()</code>	<i>(ScipyMinimize method)</i> , 92	<code>load_parameters()</code>	<i>(AbstractMultivariateModel method)</i> , 42
<code>items()</code>	<i>(CollectionRealization method)</i> , 130	<code>load_parameters()</code>	<i>(AbstractPersonalizeAlgo method)</i> , 89
<code>items()</code>	<i>(IndividualParameters method)</i> , 126	<code>load_parameters()</code>	<i>(ConstantModel method)</i> , 66
<code>iteration()</code>	<i>(AbstractFitAlgo method)</i> , 81	<code>load_parameters()</code>	<i>(ConstantPredictionAlgorithm method)</i> , 101
<code>iteration()</code>	<i>(AbstractFitMCMC method)</i> , 84	<code>load_parameters()</code>	<i>(LMEFitAlgorithm method)</i> , 103
<code>iteration()</code>	<i>(TensorMCMCSAEM method)</i> , 86	<code>load_parameters()</code>	<i>(LMEModel method)</i> , 63
K		<code>load_parameters()</code>	<i>(LMEPersonalizeAlgorithm method)</i> , 105
<code>keys()</code>	<i>(CollectionRealization method)</i> , 130	<code>load_parameters()</code>	<i>(MultivariateModel method)</i> , 51
L		<code>load_parameters()</code>	<i>(MultivariateParallelModel method)</i> , 59
<code>Leaspy</code>	<i>(class in leaspy.api)</i> , 9	<code>load_parameters()</code>	<i>(ScipyMinimize method)</i> , 92
<code>LeaspyAlgoInputError</code>	<i>(class in leaspy.algo.error)</i> , 132	<code>load_parameters()</code>	<i>(SimulationAlgorithm method)</i> , 98
<code>LeaspyConvergenceError</code>	<i>(class in leaspy.algo.error)</i> , 133	<code>load_parameters()</code>	<i>(TensorMCMCSAEM method)</i> , 87
<code>LeaspyDataInputError</code>	<i>(class in leaspy.algo.error)</i> , 132	<code>load_parameters()</code>	<i>(UnivariateModel method)</i> , 34
<code>LeaspyException</code>	<i>(class in leaspy.algo.error)</i> , 131	<code>Loader</code>	<i>(class in leaspy.datasets.loader)</i> , 110
<code>LeaspyIndividualParamsInputError</code>	<i>(class in leaspy.algo.error)</i> , 132	<code>LogisticAttributes</code>	<i>(class in leaspy.models.utils.attributes.logistic_attributes)</i> , 72
<code>LeaspyInputError</code>	<i>(class in leaspy.algo.error)</i> , 132	<code>LogisticParallelAttributes</code>	<i>(class in leaspy.models.utils.attributes.logistic_parallel_attributes)</i> , 74
<code>LeaspyModelError</code>	<i>(class in leaspy.algo.error)</i> , 132		
<code>LeaspyTypeError</code>	<i>(class in leaspy.algo.error)</i> , 132		
<code>LinearAttributes</code>	<i>(class in leaspy.models.utils.attributes.linear_attributes)</i> , 70		
<code>LMEFitAlgorithm</code>	<i>(class in leaspy.algo.others.lme_fit)</i> , 103		
<code>LMEModel</code>	<i>(class in leaspy.models.lme_model)</i> , 61		
<code>LMEPersonalizeAlgorithm</code>	<i>(class in leaspy.algo.others.lme_personalize)</i> , 105		
<code>load()</code>	<i>(AlgorithmSettings class method)</i> , 118		
<code>load()</code>	<i>(IndividualParameters class method)</i> , 126		
<code>load()</code>	<i>(Leaspy class method)</i> , 13		
<code>load_cofactors()</code>	<i>(Data method)</i> , 113		
<code>load_dataset()</code>	<i>(Loader static method)</i> , 111		
<code>load_hyperparameters()</code>	<i>(AbstractModel method)</i> , 25		
<code>load_hyperparameters()</code>	<i>(AbstractMultivariateModel method)</i> , 42		
<code>load_hyperparameters()</code>	<i>(ConstantModel method)</i> , 65		
<code>load_hyperparameters()</code>	<i>(LMEModel method)</i> , 63		
<code>load_hyperparameters()</code>	<i>(MultivariateModel method)</i> , 51		
<code>load_hyperparameters()</code>	<i>(MultivariateParallelModel method)</i> , 58		
<code>load_hyperparameters()</code>	<i>(UnivariateModel method)</i> , 34		
<code>load_individual_parameters()</code>	<i>(Loader static method)</i> , 111		
<code>load_leaspy_instance()</code>	<i>(Loader static method)</i> , 111		
<code>load_parameters()</code>	<i>(AbstractAlgo method)</i> , 77		
<code>load_parameters()</code>	<i>(AbstractFitAlgo method)</i> , 81		
<code>load_parameters()</code>	<i>(AbstractFitMCMC method)</i> , 84		
<code>load_parameters()</code>	<i>(AbstractModel method)</i> , 25		

O

`obj()` (*ScipyMinimize method*), 93
`OutputsSettings` (class in *spy.io.settings.outputs_settings*), 120

P

`personalize()` (*Leaspy method*), 13

R

`random_variable_informations()` (*AbstractModel method*), 25
`random_variable_informations()` (*AbstractMultivariateModel method*), 42
`random_variable_informations()` (*MultivariateModel method*), 51
`random_variable_informations()` (*MultivariateParallelModel method*), 59
`random_variable_informations()` (*UnivariateModel method*), 34
`Realization` (class in *spy.io.realizations.realization*), 128
`run()` (*AbstractAlgo method*), 78
`run()` (*AbstractFitAlgo method*), 82
`run()` (*AbstractFitMCMC method*), 85
`run()` (*AbstractPersonalizeAlgo method*), 90
`run()` (*ConstantPredictionAlgorithm method*), 102
`run()` (*LMEFitAlgorithm method*), 104
`run()` (*LMEPersonalizeAlgorithm method*), 106
`run()` (*ScipyMinimize method*), 94
`run()` (*SimulationAlgorithm method*), 99
`run()` (*TensorMCMCSAEM method*), 87
`run_impl()` (*AbstractAlgo method*), 78
`run_impl()` (*AbstractFitAlgo method*), 82
`run_impl()` (*AbstractFitMCMC method*), 85
`run_impl()` (*AbstractPersonalizeAlgo method*), 90
`run_impl()` (*ConstantPredictionAlgorithm method*), 102
`run_impl()` (*LMEFitAlgorithm method*), 104
`run_impl()` (*LMEPersonalizeAlgorithm method*), 106
`run_impl()` (*ScipyMinimize method*), 94
`run_impl()` (*SimulationAlgorithm method*), 99
`run_impl()` (*TensorMCMCSAEM method*), 88

S

`sample()` (*AbstractSampler method*), 108
`sample()` (*GibbsSampler method*), 109
`save()` (*AbstractModel method*), 26
`save()` (*AbstractMultivariateModel method*), 42
`save()` (*AlgorithmSettings method*), 119
`save()` (*ConstantModel method*), 66
`save()` (*IndividualParameters method*), 126
`save()` (*Leaspy method*), 14
`save()` (*LMEModel method*), 63

`save()` (*MultivariateModel method*), 52
`save()` (*MultivariateParallelModel method*), 59
`save()` (*UnivariateModel method*), 35
`ScipyMinimize` (class in *spy.algo.personalize.scipy_minimize*), 91
`set_autograd()` (*Realization method*), 129
`set_logs()` (*AlgorithmSettings method*), 119
`set_output_manager()` (*AbstractAlgo method*), 79
`set_output_manager()` (*AbstractFitAlgo method*), 82
`set_output_manager()` (*AbstractFitMCMC method*), 85
`set_output_manager()` (*AbstractPersonalizeAlgo method*), 91
`set_output_manager()` (*ConstantPredictionAlgorithm method*), 102
`set_output_manager()` (*LMEFitAlgorithm method*), 105
`set_output_manager()` (*LMEPersonalizeAlgorithm method*), 106
`set_output_manager()` (*ScipyMinimize method*), 94
`set_output_manager()` (*SimulationAlgorithm method*), 100
`set_output_manager()` (*TensorMCMCSAEM method*), 88
`set_tensor_realizations_element()` (*Realization method*), 129
`simulate()` (*Leaspy method*), 15
`SimulationAlgorithm` (class in *spy.algo.simulate.simulate*), 95
`smart_initialization_realizations()` (*AbstractModel method*), 26
`smart_initialization_realizations()` (*AbstractMultivariateModel method*), 43
`smart_initialization_realizations()` (*MultivariateModel method*), 52
`smart_initialization_realizations()` (*MultivariateParallelModel method*), 59
`smart_initialization_realizations()` (*UnivariateModel method*), 35
`subset()` (*IndividualParameters method*), 126

T

`TensorMCMCSAEM` (class in *spy.algo.fit.tensor_mcmcsaem*), 86
`time_reparametrization()` (*AbstractModel static method*), 26
`time_reparametrization()` (*AbstractMultivariateModel static method*), 43
`time_reparametrization()` (*MultivariateModel static method*), 52
`time_reparametrization()` (*MultivariateParallelModel static method*), 60
`time_reparametrization()` (*UnivariateModel static method*), 35

`to_dataframe()` (*Data method*), 113
`to_dataframe()` (*IndividualParameters method*), 127
`to_pandas()` (*Dataset method*), 115
`to_pytorch()` (*IndividualParameters method*), 127

U

`UnivariateModel` (*class* *in* *lea-*
 spy.models.univariate_model), 27
`unset_autograd()` (*Realization method*), 129
`update()` (*AbstractAttributes method*), 68
`update()` (*AbstractManifoldModelAttributes method*),
 70
`update()` (*LinearAttributes method*), 71
`update()` (*LogisticAttributes method*), 73
`update()` (*LogisticParallelAttributes method*), 75
`update_MCMC_toolbox()` (*AbstractMultivariateModel*
 method), 43
`update_MCMC_toolbox()` (*MultivariateModel method*),
 52
`update_MCMC_toolbox()` (*MultivariateParallelModel*
 method), 60
`update_MCMC_toolbox()` (*UnivariateModel method*),
 35
`update_model_parameters_burn_in()` (*Abstract-*
 Model method), 26
`update_model_parameters_burn_in()` (*Abstract-*
 MultivariateModel method), 43
`update_model_parameters_burn_in()` (*Multivi-*
 ariateModel method), 53
`update_model_parameters_burn_in()` (*Multivi-*
 ariateParallelModel method), 60
`update_model_parameters_burn_in()` (*Univariate-*
 Model method), 36
`update_model_parameters_normal()` (*Abstract-*
 Model method), 26
`update_model_parameters_normal()` (*AbstractMul-*
 tivariateModel method), 43
`update_model_parameters_normal()` (*Multivariate-*
 Model method), 53
`update_model_parameters_normal()` (*Multivi-*
 ariateParallelModel method), 60
`update_model_parameters_normal()` (*Univariate-*
 Model method), 36

V

`validate_compatibility_of_dataset()` (*Constant-*
 Model method), 66
`validate_compatibility_of_dataset()` (*LMEMo-*
 del method), 63
`values()` (*CollectionRealization method*), 130